DATE	REV	DESCRIPTION	BY	CHKD

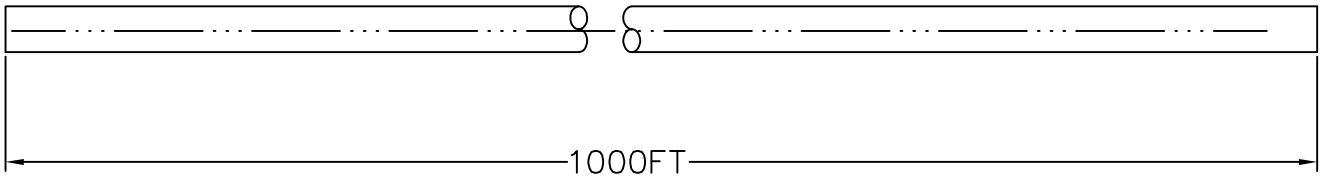

Marking: YFC UTP CAT.5E 350MHZ PATCH ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2
3P VERIFIED FOR GIGABIT ETHERNET 24AWGX4P TYPE CM (UL) C(UL) CMH
E164469-F3 XXXXFT

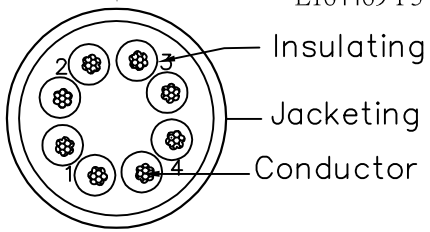

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

Conductor		Bare Copper 24AWG 7/0.196± 0.015mm
Insulation		Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.95± 0.06mm
Jacketing	PVC	Thickness:MIN at any point:0.42mm MAX AVG:0.48mm Diameter: 5.65± 0.1mm

WIRE	CAT.5E UTP STR
PLUG	
Length	1000FT



1R/1000FT

Unless specified on the drawing, tolerances are per the follows:
. ± 1
.X ± 0.2
.XX ± 0.05

3RD

DRAW.NO		ITEM	CAT.5E UTP STR		
DEPARTMENT		DRAW	SWH	DATE	20060904
SCALE		CHECKER		APPROVAL	
UNIT	MM	SHEET	1 OF 1		