


4 Installing the display

Place the adapter bracket mounted display onto the plate of articulated arm assembly, as shown in fig 4.1. aligning the mounting holes on the plate of articulated arm assembly with the mounting holes on the adapter bracket, tighten the safety screws with a 3mm Allen key(M-E). Do not over tighten! As shown in fig 4.1.


Important: Make sure the bracket mounted display is correctly mounted and the safety locking screws are locked safely before loosening the display.

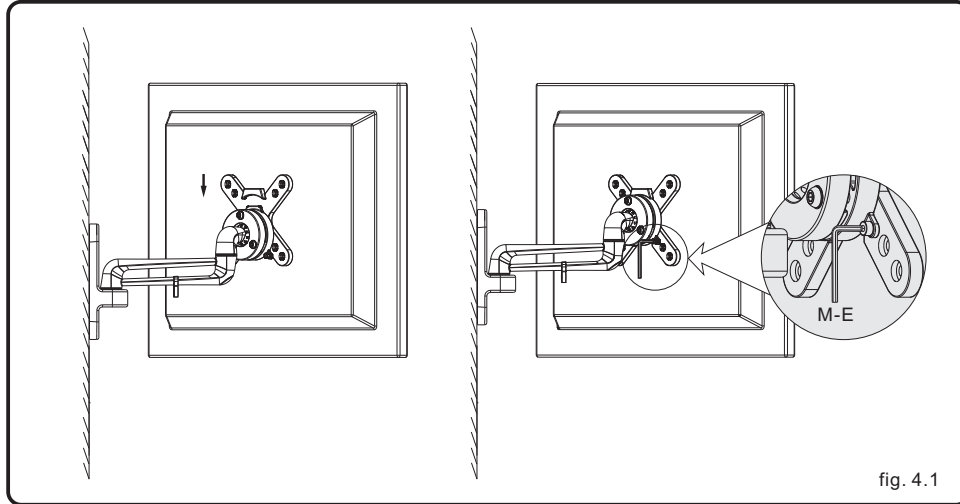

5 Pitching angle adjustment

Tighten the screws till the display angle can be fixed, then push or pull from top or bottom of screen to adjust the display to the desired angle.


The pitching angle can be adjusted between $-15^{\circ} \sim +15^{\circ}$, swivel: 180° , pivot: 360° , as shown in fig.5.1.

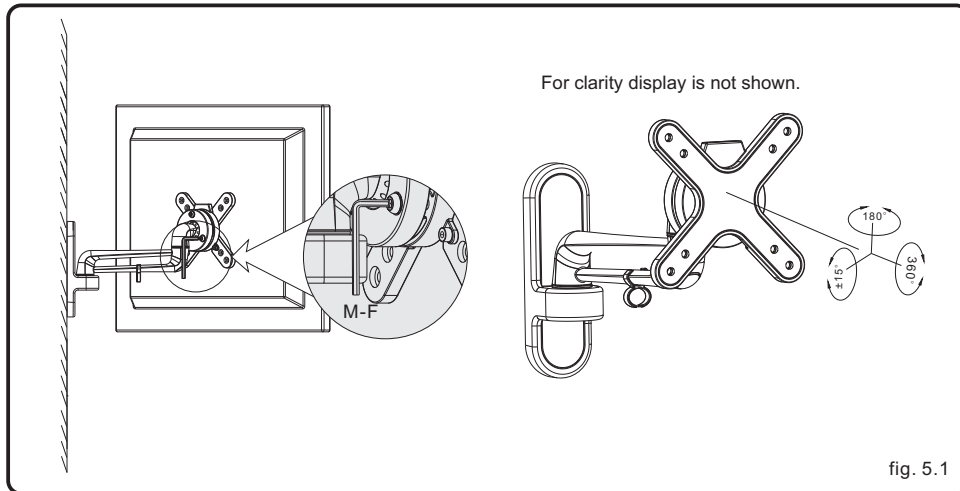


Maintenance

Once you have mounted the bracket and the flat screen, check that they are sufficiently secure and safe to use. You should check whether screws are fixed well each two months. If you have any doubts regarding the installation, please consult our retailer or service department for detail.

INSTALLATION INSTRUCTIONS

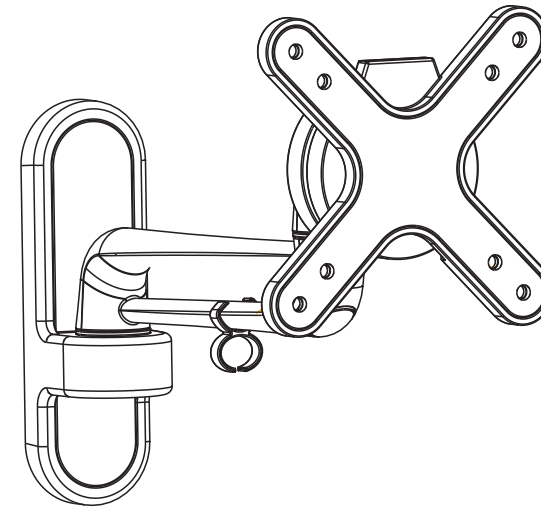

Pitching angle:
 $+15^{\circ} \sim -15^{\circ}$
Swivel: $\pm 90^{\circ}$

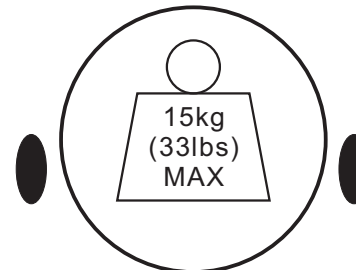

LCD Wall Mount

Model: EAT2-111

Max Load Capacity: 15kg(33lbs)


NOTE: Read entire instruction sheet before you start installation and assembly.

WARNING

- Do not begin to install your product until you have and understand the instructions and warnings contained in this Installation Sheet. If you have any question regarding any of the instruction or warning, Please contact your local distributor.
- Please refer to manufacturer's installation guide recommendation for required distance from wall to avoid risk of property damage.
- This product should only be installed by someone of good mechanical aptitude, has experience with basic building construction , and fully understand these instructions.
- Make sure that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.
- Never exceed the Maximum Load Capacity.
- If mounting to wood wall studs, make sure that mounting screws are anchored into the center of the studs. Use of an "edge to edge" stud finder is highly recommended.
- Always use an assistant or mechanical lifting equipment to safely lift and position equipment.
- Tighten screws firmly, but do not over tighten. over tightening can damage the items, greatly reducing their holding power.
- This product intended for indoor use only. Use of this product outdoors could lead to product failure and personal injury.

Component Checklist

IMPORTANT: Ensure you have received all parts against the component checklist prior to installing. If any parts are missing or faulty, telephone the special franchiser for a replacement.



articulated arm assembly (x1)



decorative cover 1 (x1)



decorative cover 2 (x1)

Package M



M4x14 (x4)
M-A



M5x14 (x4)
M-B



D4 washer (x4)
M-C



D5 washer (x4)
M-D




3mm Allen key (x1)
M-E



4mm Allen key (x1)
M-F

Package W



ST5.5x50(x3)
W-A



concrete anchor (x3)
W-B




D6 washer (x3)
W-C

Tools required

- Phillips Head Screw driver(200mm length exclude the handle)
- Electric drill and 10mm masonry bit for concrete wall installation
- Marking Pen
- Hammer

Loosen the two screws with a 3mm Allen key(M-E) to disassemble the adapter bracket from the assemble product for easy installation as shown below. Retain two screws for later use.

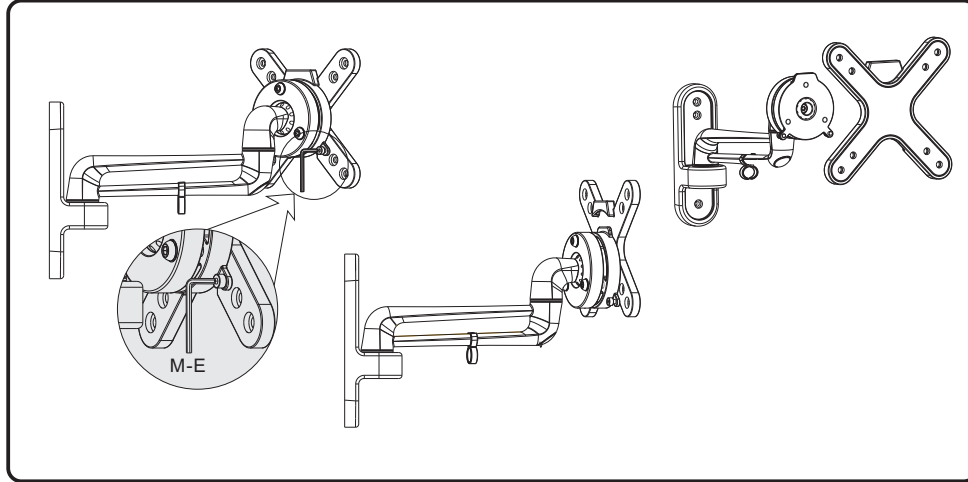

1a Wood stud wall mounting:

⚠ WARNING

- Make sure that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.
- Tighten screws firmly, but do not over tighten. over tightening can damage the screws, greatly reducing their holding power.
- Make sure that mounting screws are anchored into the center of the studs. Use of an “edge to edge” stud finder is highly recommended.
- Hardware provided is for attachment of mount through standard thickness drywall or plaster into studs. Installers are responsible to provide hardware for other types of mounting situations.

Use a stud finder to locate the edges of the studs. Use of an edge-to-edge stud finder is highly recommended. Based on their edges, draw a vertical line down the stud's center. Place wall plate on wall as a template. and mark the center of the three mounting holes. Make sure that the mounting holes are on the stud centerline. Drill three 1/8" (3mm) dia. Holes 1.2" (30mm) deep. Make sure that the wall plate is level, secure it using three screws (W-A) and three washers(W-C) as shown in fig. 1.1.

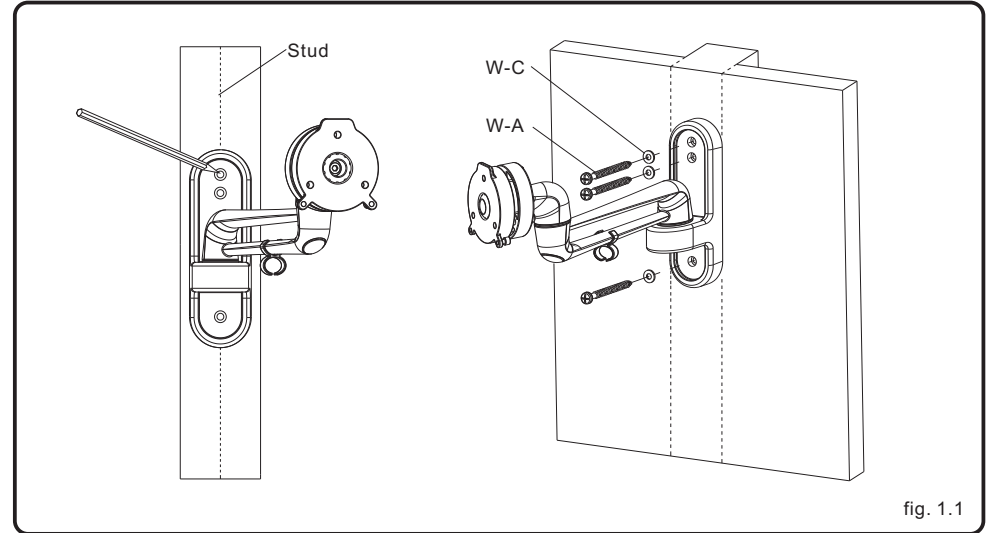



fig. 1.1

1b Solid brick and concrete block mounting:

⚠ WARNING



- When installing wall mounts on cinder block, verify that you have a minimum of 1-3/8" of actual concrete thickness in the hole to be used for the concrete anchors. Do not drill into mortar joints! Be sure to mount in a solid part of the block, generally 1" minimum from the side of the block. It is suggested electric drill on slow setting is used to drill the hole instead of a hammer drill to avoid breaking out the back of the hole when entering a void or cavity.
- Installer must verify that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.

Use the Wall Plate as a template to mark three holes locations on the wall, as shown in fig.1.2. Pre-drill these holes with a 8mm masonry bit to at least 50mm in depth. Insert a Concrete Anchor (W-B) into each of these holes. Attach the Wall Plate to the wall using three screws (W-A) and three washers (W-C), as shown in fig.1.3.

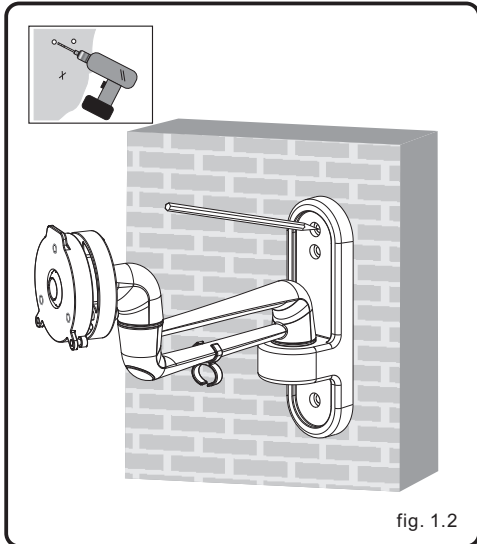

2 Installing decorative covers

Insert decorative covers along wall plate rail until it snap fits onto the wall plate as shown in fig.2.1.

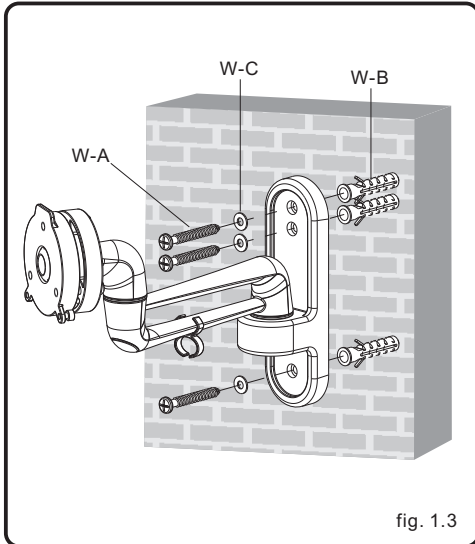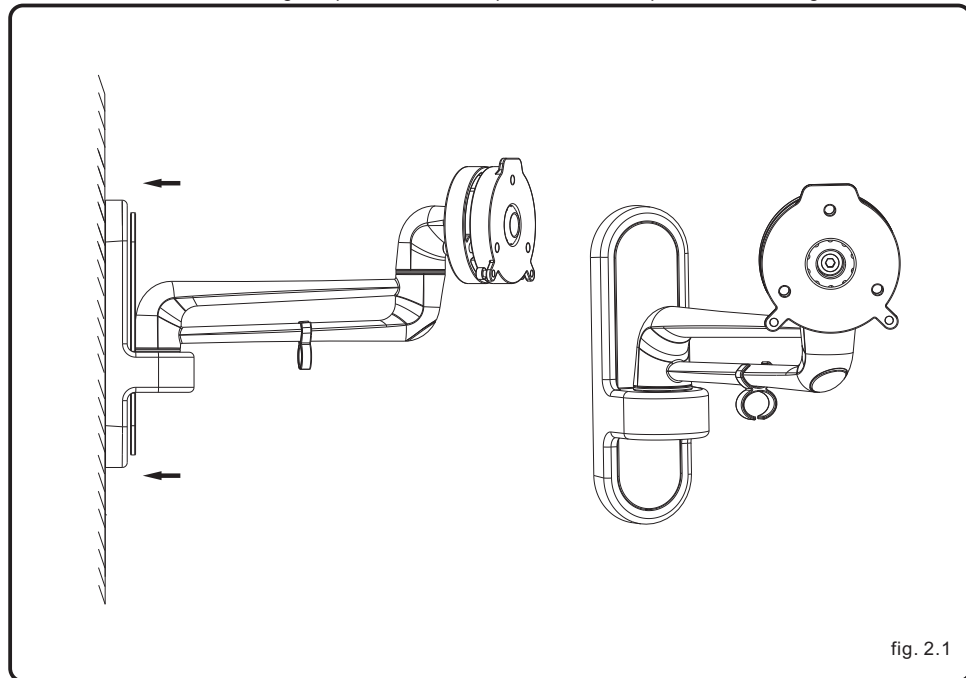

3 Installing adapter bracket

To prevent scratching the screen, set a cloth on a flat, level surface that will support the weight of the screen. Place screen face side down. Place adapter bracket on the back of screen, align to holes, and center on back of screen, as shown in fig.3.1. Attach the adapter bracket to the back of the screen using the appropriate combination of screws, washers, as shown in fig.3.2.

