


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev.Date	Modified By	Brief Description
1.0	2014-12-3	Pillar	Gold-plated connectors replaced by nickel plating

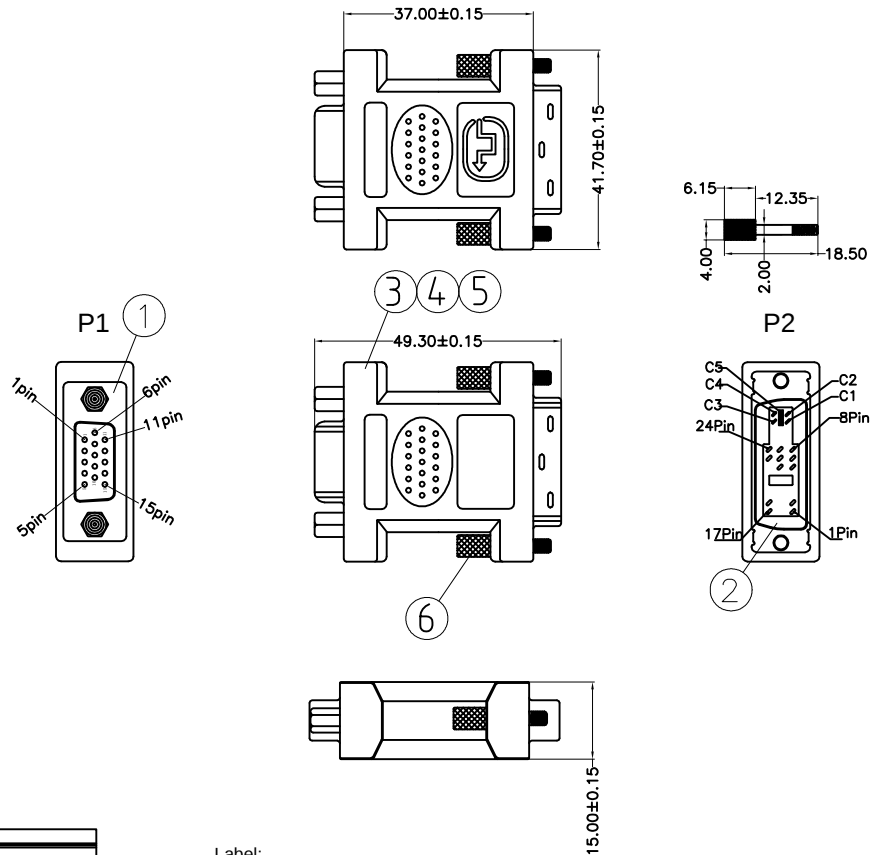

Electrical character:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC/AC 300V AT 10ms.
- 3)Insulation resistance:10M Ohm(min)
- 4)Conductive resistance:3 Ohm

PIN ASSIGNMENT

P1	P2
1	C1
2	C2
3	C3
5	15
10	
6	
7	C5
8	
	14
9	16
12	7
13	C4
14	8
15	6
Shell	Shell

⑥	Thumbscrew	#4-40UNC,Φ2.0×L18.5mm,Nickel Plated	2	PCS
⑤	Wire	1007,28#	N/A	PCS
④	Overmold	PVC,45Pa,Black	N/A	g
③	Innermold	PE,Low density	N/A	g
②	Conn	DVI-A(12+5) M,PIN G/F,Blue,Shell Nickel Plated	1	PCS
①	Conn	HDB15P F,PIN G/F,Black,Shell Nickel Plated	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT



DRAWN BY	DATE: 2014/12/03	DESCRIPTION: DVI-A(12+5) to VGA Adapter
CHECKED BY	SHEET 1 of 1	ITEM NO. 180631
APPROVED BY	SCALE None	REV. 1.0
	UNIT: mm	