NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
	2014.08.06		

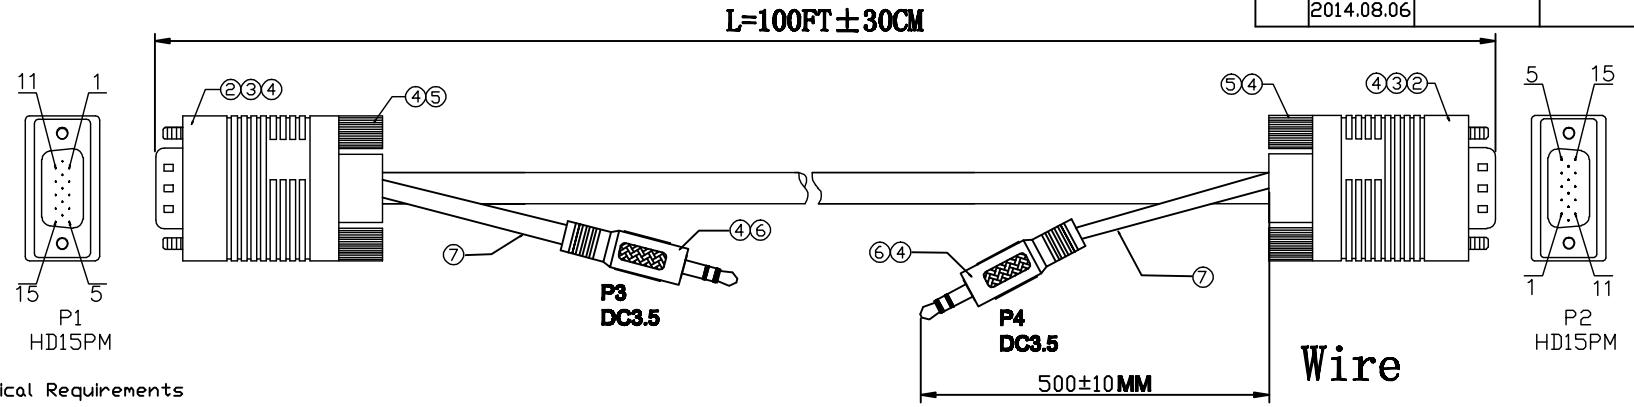

Technical Requirements

1.Electrical Characteristics:

1.1.cable must pass electrical testing, no short circuit, open circuit, indirect sexual contact, insufficient insulation, dislocation, and other electrical contact resistance of adverse circumstances

1.2 Electrical Test Conditions

Conductor Resistance: ≤10Ω

Insulation resistance: ≥10MΩ/300V

2.Appearance requirements:

2.1 No shot short.shrink、flow liner

2.2 Wire surface printing clear, smooth appearance, can not have scratches and obvious color

2.3 15PIN connector no empty pin and blunt glue

2.4 Terminals can not have oxidation or electrodeposited coating fall off

3.Size request

3.1 cable length match the drawing

3.2"A" qc test according to this size

4. cable wire connect point

view the point

5.Packing:

Circle around a single package.

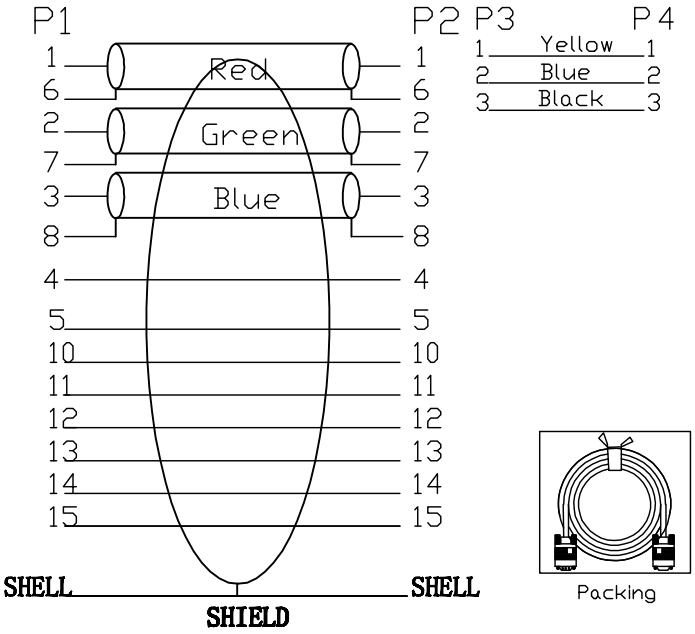

Packing

1).Material List :

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑦	Wire	Black OD3.5mm L=500mm	2	PCS
⑥	DC	DC3.5MM	2	PCS
⑤	SCREW	Screw2.3*4MM	4	PCS
④	Outer Moulding	45P Black PVC(ROHS)	NA	KG
③	PE	PE internal Mold Material	NA	KG
②	Connector	HD15PM Blue Bobbin Nickel-Plated	2	PCS
①	Wire	(7/0.12TC+PEP5+30/0.12CCA+2.5PVC)+OCom+7/0.12TC+OC+AL+D 7/0.12SC+12SB AL-35 OD9.0	100	FT

BestLinkNetware

DRAWN BY	DATE: 2014/08/06	DESCRIPTION: 15DB SVGA+3.5mm Audio Male to Male Monitor Cable	
CHECKED BY	SHEET 1 of 1	ITEM NO. 180558	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm