







NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

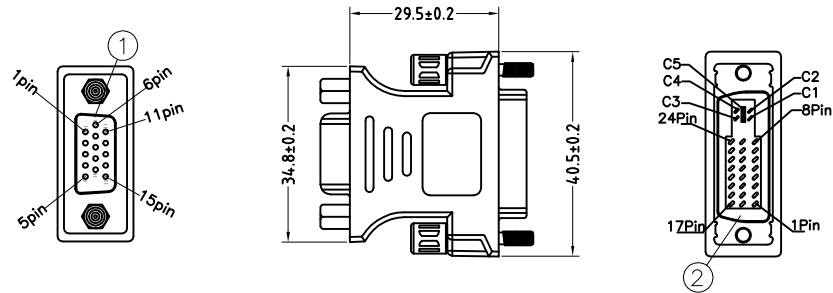

Label:
Size:50 x 20 mm



REVISION INFORMATION

Rev.	Rev.Date	Modified By	Brief Description
1.0	2015-3-6	Pillar	Adding "NO." cote
2.0	2015-4-3	Pillar	Modify the "LOGO" direction

Electrical character:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC/AC 300V AT 10ms.
- 3)Insulation resistance:10M Ohm(min)
- 4)Conductive resistance:3 Ohm

PIN ASSIGNMENT

VGA	DVI
1	C1
2	C2
3	C3
6	
7	C5
8	
13	C4
14	8

⑥	Thumbscrew	#4-40UNC,φ2.0×L24.2mm,Nickel Plated,Molding PVC(Ivory)	2	PCS
⑤	Wire	30#(7/0.10)	N/A	PCS
④	Overmold	PVC,45Pa,Ivory	N/A	g
③	Innermold	PE,Low density	N/A	g
②	Conn	DVI-I(24+5) M,PIN G/F,White,Shell Nickel Plated	1	PCS
①	Conn	HDB15P F,PIN G/F,Blue,Shell Nickel Plated	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT



DRAWN BY	DATE: 2015/04/03	DESCRIPTION: DVI-I(24+5) to VGA Adapter
CHECKED BY	SHEET 1 of 1	ITEM NO. 180639
APPROVED BY	SCALE None	REV. 2.0
	UNIT: mm	