



NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

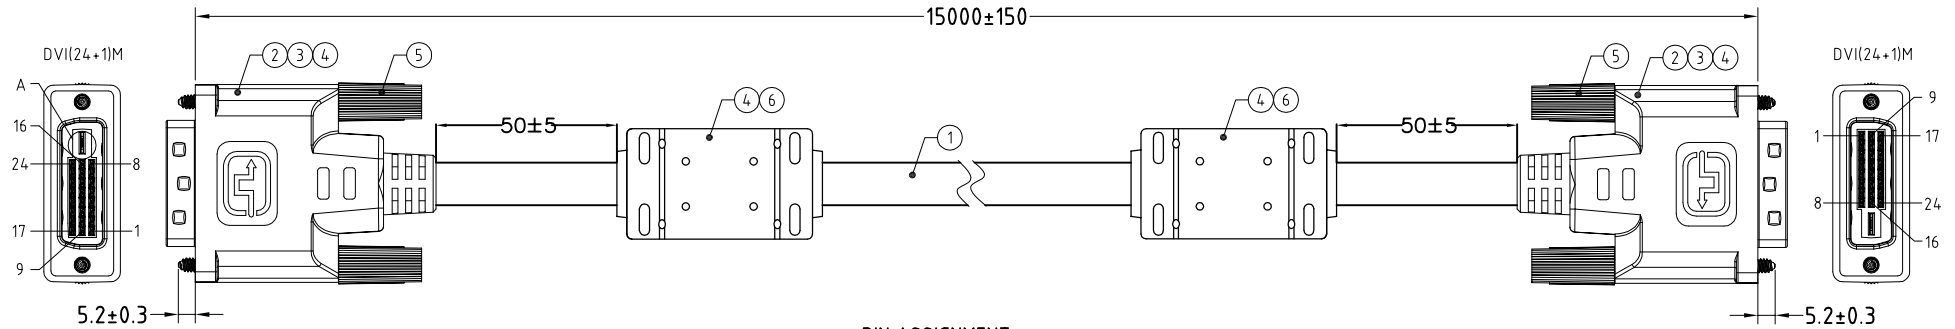


PIN ASSIGNMENT:

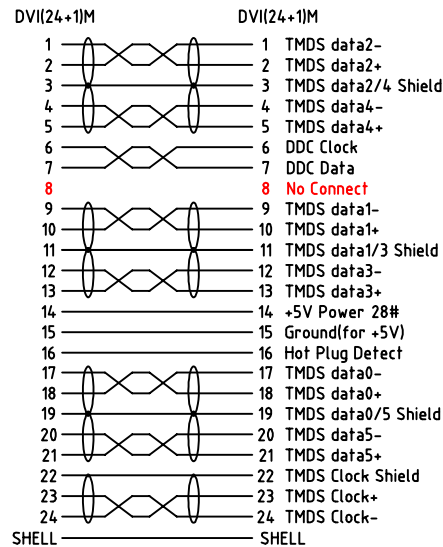

Electrical character:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC 300V AT 10ms.
- 3)Insulation resistance:10M Ohm(min)
- 4)Residual operating current:
 - a.<1M=0.5mA; b.1.0~2.0M=1.0mA;
 - c.2.0~3.0M=2.0mA; d.3.0~5.0M=3.0mA;
 - e.5.0~10M=5.0mA; f.10~15M=7.0mA;
- 5)Conductive resistance:10 Ohm(max)

Wire Details

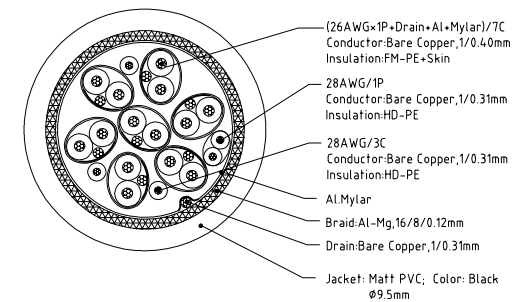

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①	Cable	UL20276 (26#BC/(1P+D/30#+A+M)/7C+28#BC/(1P+3C)+A+D+B+PVC,OD9.5mm Jacket:Black		
②	DVI_Conn	DVI(24+1)M,PIN G/F,Black Insulation,Steel-Shell(G/F Plated),Solder type		
③	Innrmold	PE,Low density		
④	Overmold	PVC,45Pa,Black		
⑤	Thumbscrew	#4-40UNC,Ø2.8*L44.5mm,Nickel Plated		
⑥	Fe-core	17.5(OD)*10(ID)*28.0(L)mm		

Unless specified on the drawing, tolerances are per the follows:

.	+1
.x	+0.2
.xx	+0.05



DRAWN BY	DATE: 2015/05/21	DESCRIPTION: DVI(24+1) M TO M Cable
CHECKED BY	SHEET 1of2	ITEM NO. 180659
APPROVED BY	SCALE None	REV. 00 UNIT:mm