


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev.Date	Modified By	Brief Description
1.0	2015-4-20	Pillar	Change the product model

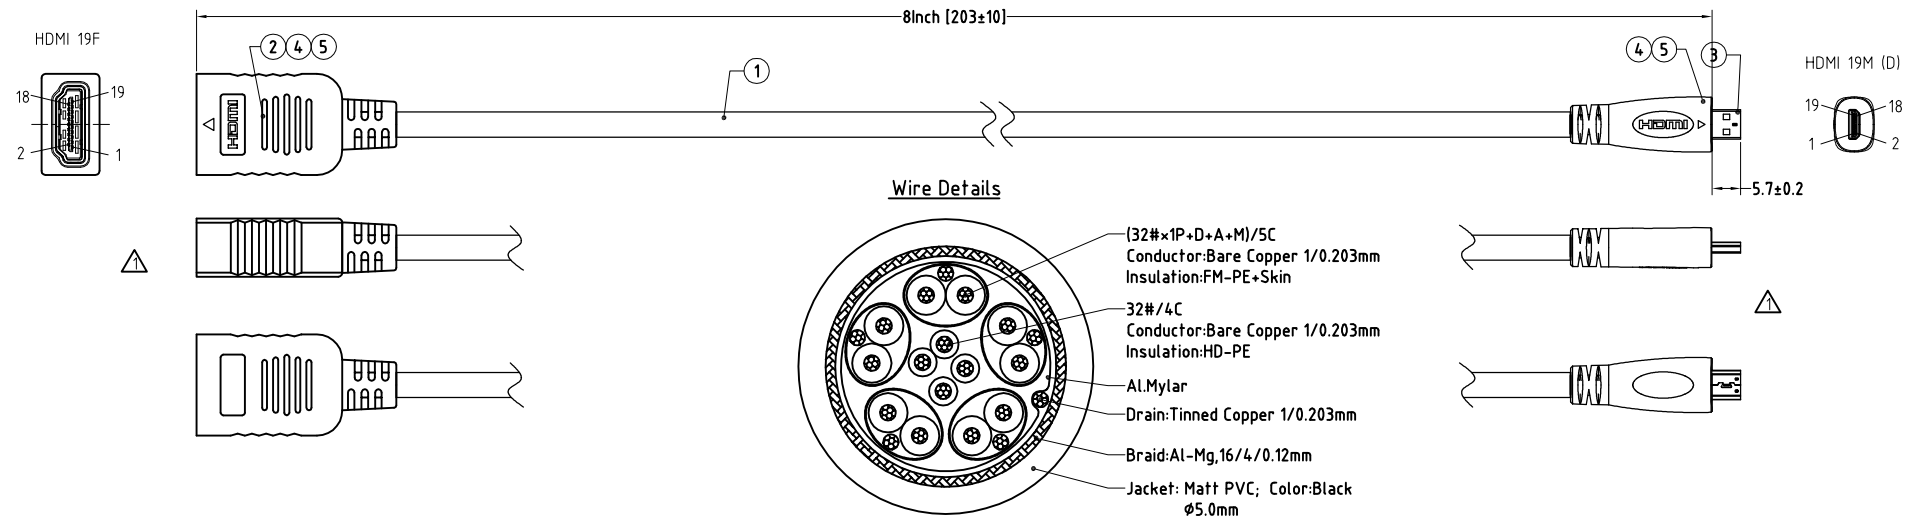



PIN ASSIGNMENT(1.4v)

HDMI 19F(A)	HDMI 19M(D)
3	Red
1	White
2	Drain
6	Green
4	White
5	Drain
9	Blue
7	White
8	Drain
12	Brown
10	White
11	Drain
19	Black
14	White
17	Drain
13	White
15	Yellow
16	Orange
18	Red
SHELL	Drain

Electrical character:

- 100% Open/short/Intermittent testing
- Withstanding voltage: DC 300V AT 10ms.
- Insulation resistance: 10M Ohm(min)
- Residual operating current:
 - a. <1M=0.5mA; b. 1.0~2.0M=1.0mA;
 - c. 2.0~3.0M=2.0mA; d. 3.0~5.0M=3.0mA;
 - e. 5.0~10M=5.0mA; f. 10~15M=7.0mA;
- Conductive resistance: 2 Ohm Max

Label:
Size: 2.45" x 1.64"



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑤	Overmold	PVC, 45Pa, Black		
④	Innermold	PE, Low density		
③	HDMI_Conn	HDMI D/M, PIN G/F, Black Insulation, Shell(G/F Plated), Solder type		
②	HDMI_Conn	HDMI A/F, PIN G/F, Black Insulation, Steel-Shell(G/F Plated), Solder type		
①	Cable	UL20276(32#(1/0.203BC)/1P+D+A+M)/5C+32#(1/0.203TC)/4C+A+E+B(16/4/0.12, Al-Mg) OD: 5.0mm Jacket: Black PVC		

DRAWN BY	DATE: 2015/4/20	DESCRIPTION: HDMI A/F TO D/M Cable, 8"	
CHECKED BY	SHEET 1 of 1	ITEM NO. 181235	
APPROVED BY	SCALE None	REV. 1.0	UNIT: mm