


HDMI -19M/HDMI -19M.

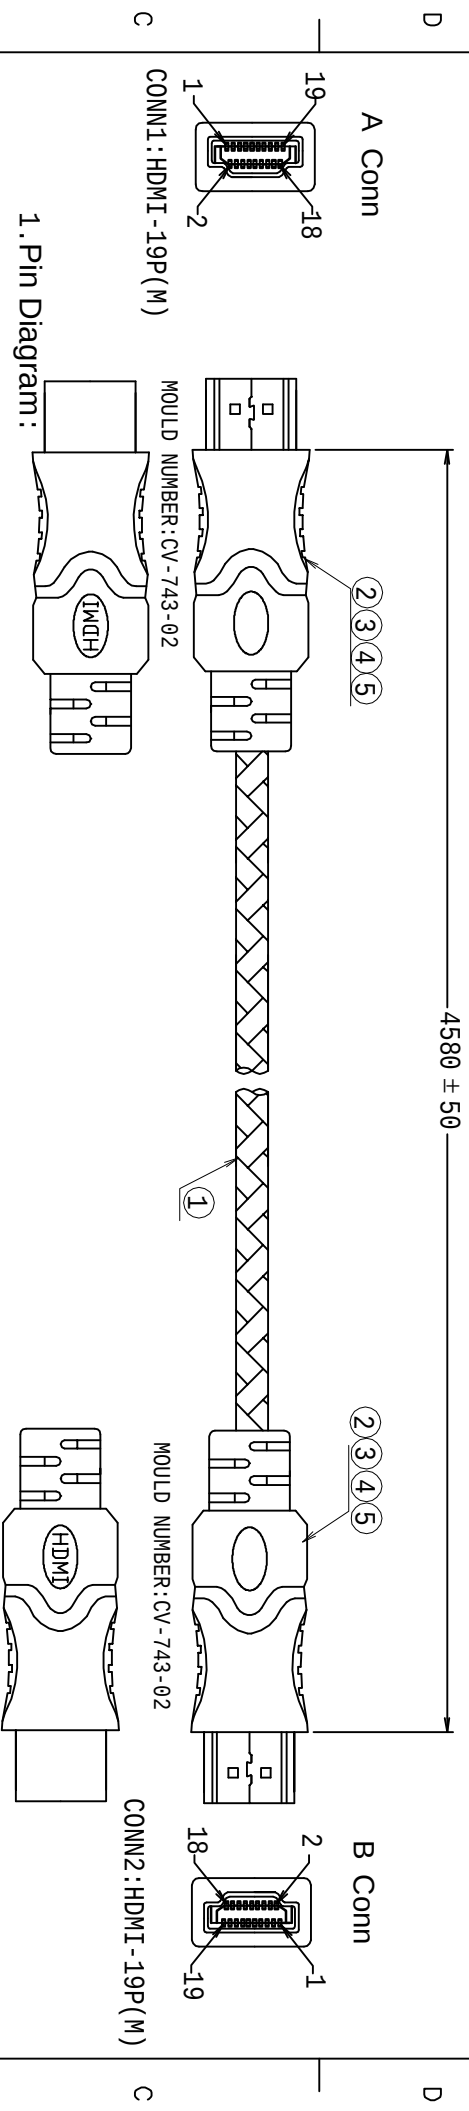

1. Pin Diagram :

	CONN1	CONN2	CONN1	CONN2
1	white	10	white	10
2	red	11	green	11
3	ground	12	ground	12
4	white	13	white	13
5	ground	14	black	14
6	brown	15	white	15
7	white	16	ground	16
8	blue	17	yellow	17
9	ground	18	orange	18
10	ground	19	red	19

2. Electricity testing :

A. Voltage : DC 300V/10ms

B. Insulation Resistance : ≥ 10MΩ

C. Conduct Resistance : ≤ 3Ω

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
①	Wire	UL20276[1P*30AWG(7/0.10TA)+D(7/0.10TA)+AL+MY]*5+30AWG(7/0.10TA)*4C+AL+D(7/0.10TA)+B(50 % AL Braid) HDMI V1.4 OD:7.3 Black L=4580mm(RoHS)	1	PC
②	Conn	HDMI-19P(M) Golden Plated (RoHS)	2	PCS
③	Internal Model	Transparent Color PE (RoHS)	2.5	g
④	Jacket	HDMI 60P Black PVC Jacket (RoHS)	2	PCS
⑤	Zinc Case	Zinc Alloy case (RoHS)	2	PCS
⑥	Netting	White and Black Netting L=4580mm (RoHS)	1	PC
⑦	Tie	L=130mm Black (RoHS)	1	PC
⑧	Polybag	9" × 12" PE Bag(RoHS)	1	PC
⑨	Waterproof Bag	20*16) "28"Watertproof Bag (RoHS)	1/40	PC
⑩	Box	48 × 40 × 20cm (RoHS)	1/40	Box

P/N	Name	HDMI -19M/HDMI -19M
181253		