


HDMI-19M/HDMI-19M.

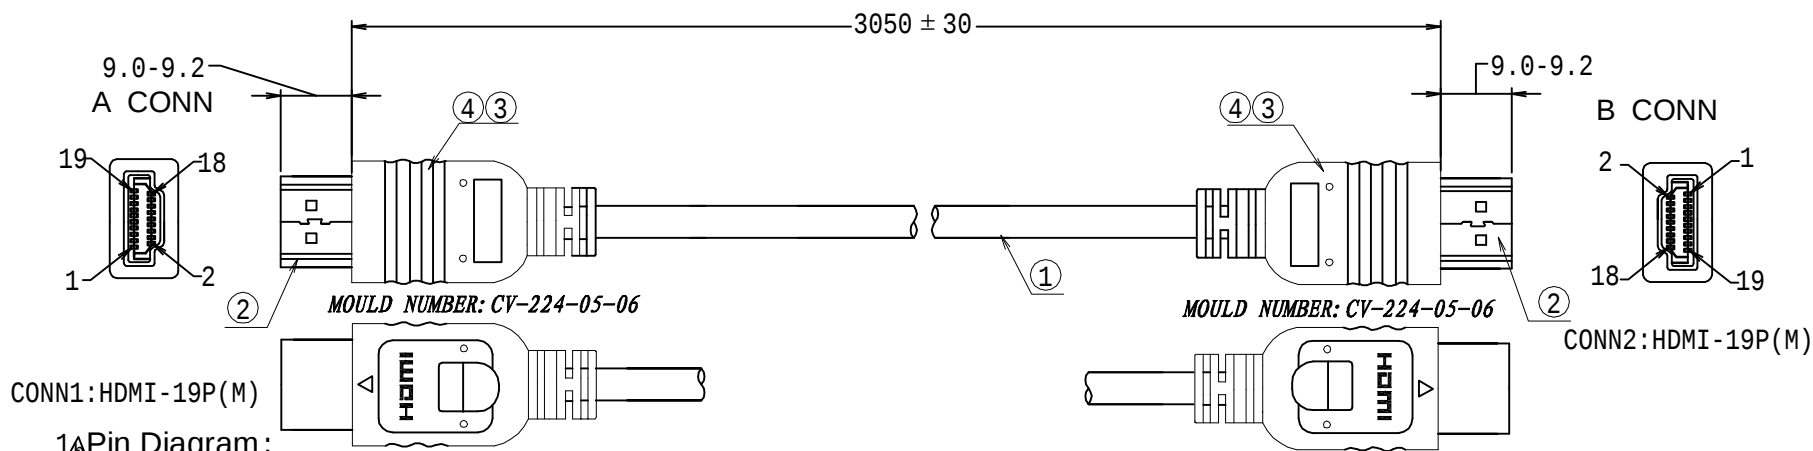

1. Pin Diagram:

CONN1	CONN2	CONN1	CONN2
1	1 white	10	10 white
3	3 red	12	12 green
2	2 ground	11	11 ground
4	4 white	14	14 white
6	6 brown	19	19 black
5	5 ground	17	17 ground
7	7 white	13	13 white
9	9 blue	15	15 yellow
8	8 ground	16	16 orange
		18	18 red
		G	G ground

2. Electricity testing :

A. Voltage: DC 300V/10ms

B. Insulation Resistance : $\geq 10M\Omega$

C. Conduct Resistance : $\leq 3\Omega$

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
①	Wire	UL20276[1P*30#(7/0.10TA)+D(7/0.10TA)+AL+MY]*5C+30#(7/0.10TA)*5C+AL+D(7/0.10TA)+B(50 % AL B HDMI V1.4 OD:7.3 Black L=3050 (RoHS)	1	PC
②	Conn	HDMI-19P(M) Golden Plated (RoHS)	2	PCS
③	Internal model	Transparents PE (RoHS)	4.4	g
④	External Model	45P Black PVC (RoHS)	15.2	g
⑤	Sticker	Sticker: 26*12mm(RoHS)	1	PC
⑥	Tie	L=120 Black (RoHS)	2	PCS
⑦	Bag	7" × 10" PE Bag (RoHS)	1	PC
⑧	Waterproof Bag	(20+16) "×28" Bag (RoHS)	1/50	PC
⑨	Box	48 × 40 × 20cm (RoHS)	1/50	BOX

P/N	181267	Name	HDMI-19M/HDMI-19M