


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
1.0	2015-11-10	Pillar	Change the logo of output

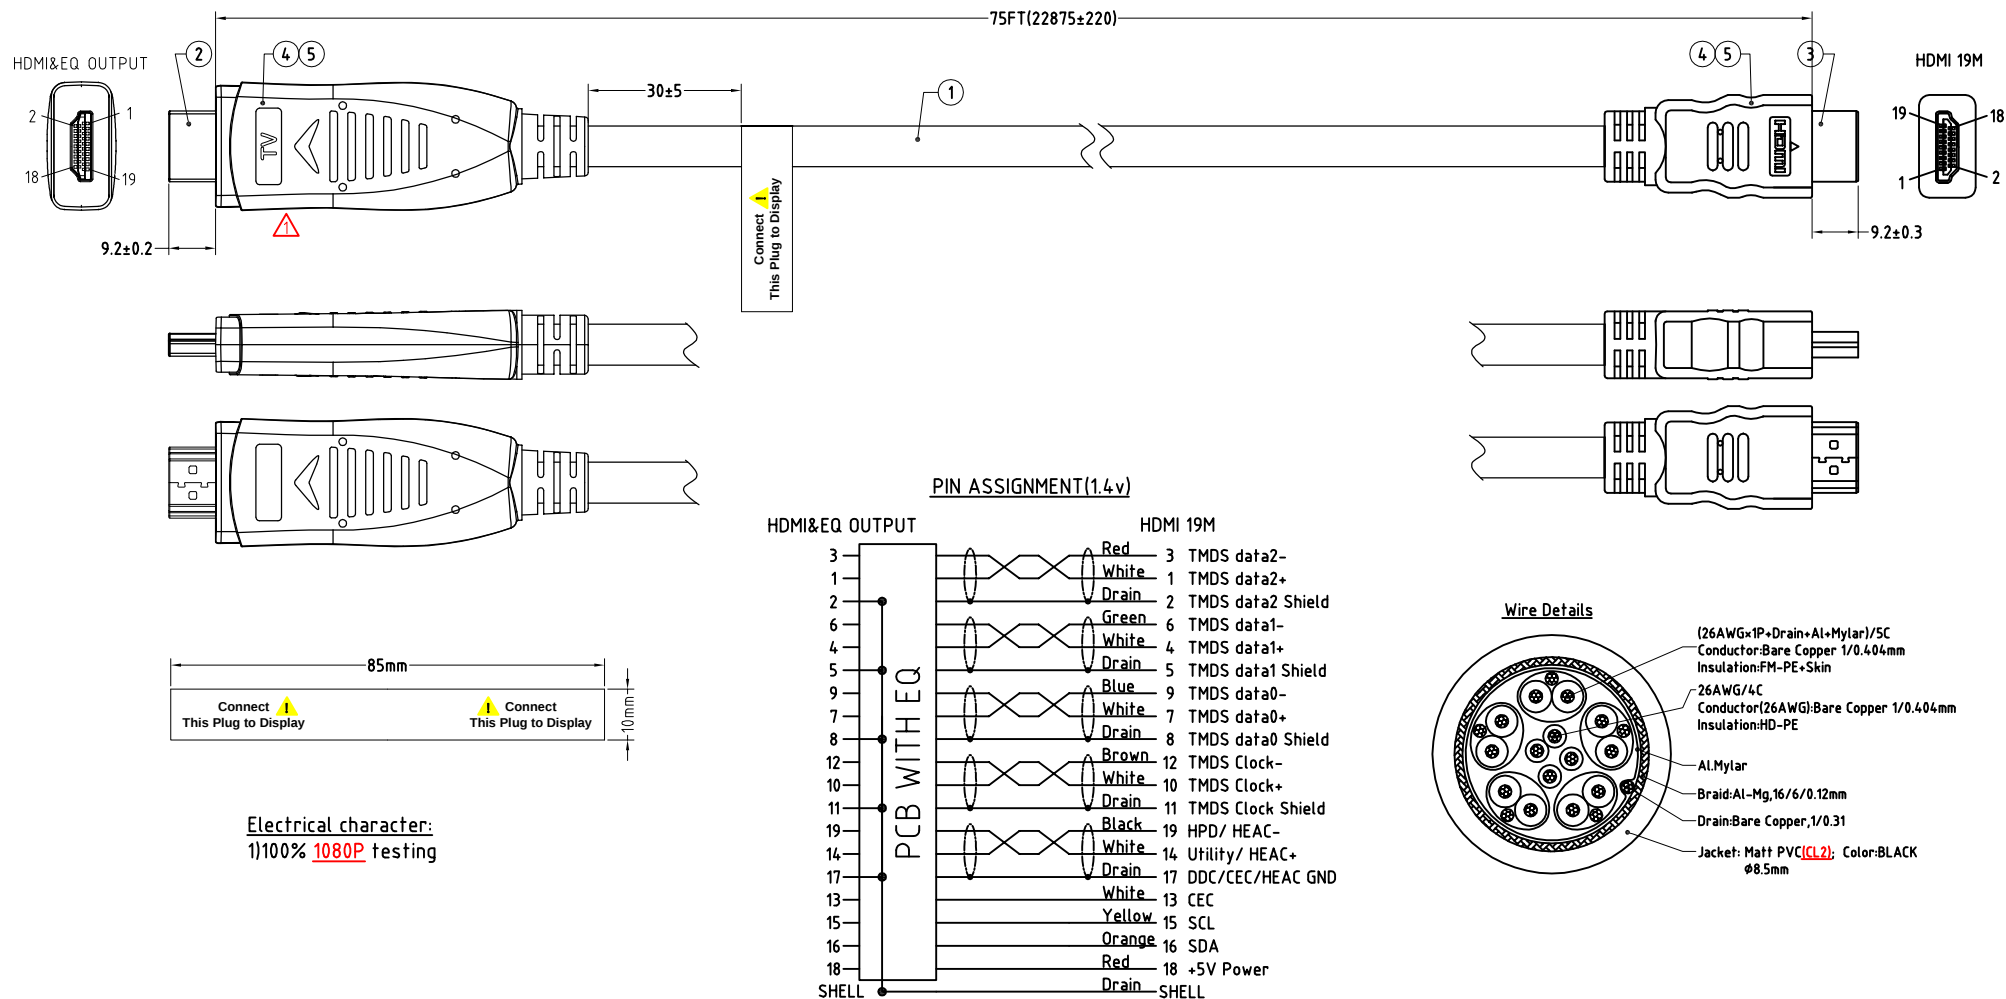

①	Cable	UL20276 (26#BC/1P+ADM)/5C+26#/4C+A+D+B(16/6/0.12,Al-Mg)+PVC(CL2),Black,OD8.5mm		
②	HDMI_Conn+PCBA	HDMI A/M(G/F Plated)+PCBA(Max3815)		
③	HDMI_Conn	HDMI A/M,PIN G/F,Black Insulation,Steel-Shell(G/F Plated),Solder type		
④	Innermold	PE,Low density		
⑤	Overmold	PVC,45Pa,Black		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

Unless specified on the drawing,
tolerances are per the follows:

.	+1
.X	+0.2
.XX	+0.05



BestLinkNetware

DRAWN BY	DATE: 2015/11/10	DESCRIPTION: HDMI A/M to HDMI A/M Cable			
CHECKED BY	SHEET 1of2	ITEM NO. 181276			
APPROVED BY	SCALE None	REV. 1.0	UNIT:mm		