NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev.Date	Modified By	Brief Description

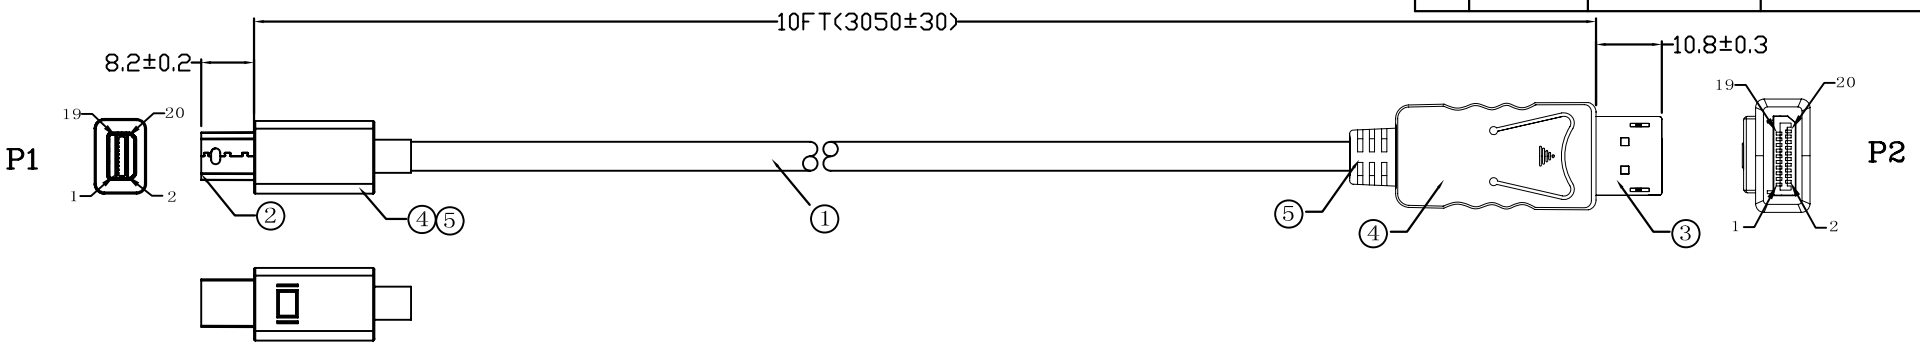

NOTE:

1. CABLE:32AWG(7/0.08TC*1P+DAM)*5P+32AWG(7/0.08TC)
   *5C+ADB(16/6/0.12 AL/Mg) PVC JACKET:BLACK
   OD:5.5±0.2mm
   MARK: DisplayPort Cable Exxxxxx AWM STYLE
   20276 80℃ 30V VW-1
2. CONNECTORS:
   DP(M) Plug,CONTACT:GOLD PLATED 1U″,SHELL:
   NICKEL PLATED INSULATION:BLACK.
   MINI DP(M) Plug,CONTACT:GOLD PLATED 1U″,SHELL:
   NICKEL PLATED INSULATION:WHITE.
3. ELECTUONICAL TEST:
   (1).100% OPEN SHORT & MISS WIRE TEST
   (2).INSULATION: DC 300V/0.01s 10Mohm Min
   (3).CONTACTOR RESISTANCE: 5 ohm
4. ROHS compliant

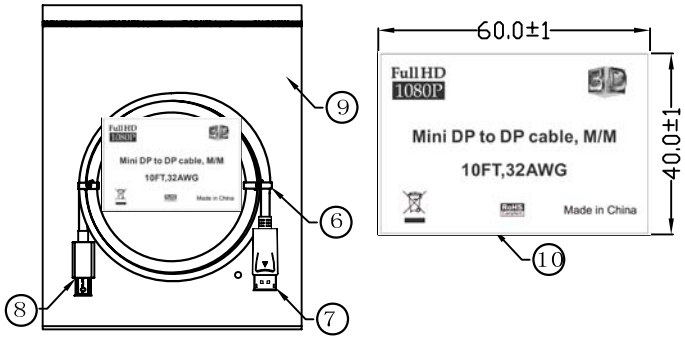

PIN OUT

P1	Wire Color	P2	SIGNAL NAME
1	D.W	11	GND
3		12	ML_Lane 0 (p)
5		10	ML_Lane 0 (n)
7	D.W	8	GND
9		9	ML_Lane 1 (p)
11		7	ML_Lane 1 (n)
13	D.W	5	GND
15		6	ML_Lane 2 (p)
17		4	ML_Lane 2 (n)
19		19	GND
2		18	Hot Plug Detect
4		13	CONFIG 1
6		14	CONFIG 2
8	D.W	2	GND
10		3	ML_Lane 3 (p)
12		1	ML_Lane 3 (n)
14	D.W	16	GND
16		15	AUX_CH (p)
18		17	AUX_CH (n)
SHELL	D.W	SHELL	

NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT
⑩	Label	HKDP911B/Z-U026,10FT copperlate paper Size: 60*40mm Lable Customer No.184012	1	PCS
⑨	PE Bag	SIZE:180*210*T0.08mm	1	PCS
⑧	CAP	MINI DisplayPor Male Dust Cover	1	PCS
⑦	CAP	DisplayPort Male Dust Cover	1	PCS
⑥	TIE	L=120MM	2	PCS
⑤	PVC	BLACK PVC 45P	0.008	KG
④	PE	PE:LDPE NATURE	0.008	KG
③	DP CONN	DP Male Plug Pin Gold Plated 1U″,Shell Nickel Plated Insulation Black ABS Hood	1	SET
②	MINI DP CONN	MINI DP Male Plug Pin Gold Plated 1u″,Shell Nickel Plated Insulation White	1	SET
①	CABLE	32AWG(7/0.08TC*1P+DAM)*5P+32AWG(7/0.08TC)*5C+ADB(16/6/0.12 AL/Mg) PVC JACKET:BLACK OD:5.5±0.2mm	3.05	M

BestLinkNetware

DRAWN BY Jane	DATE: 2014.06.07	DESCRIPTION: 10FT Mini DP Male to DP Male Cable
CHECKED BY	SHEET 1 of 1	ITEM NO. 184012
APPROVED BY	SCALE NONE	REV.00 UNIT:mm