


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION


| Rev. | Rev.Date | Modified By | Brief Description |
|------|----------|-------------|-------------------|
| | | | |

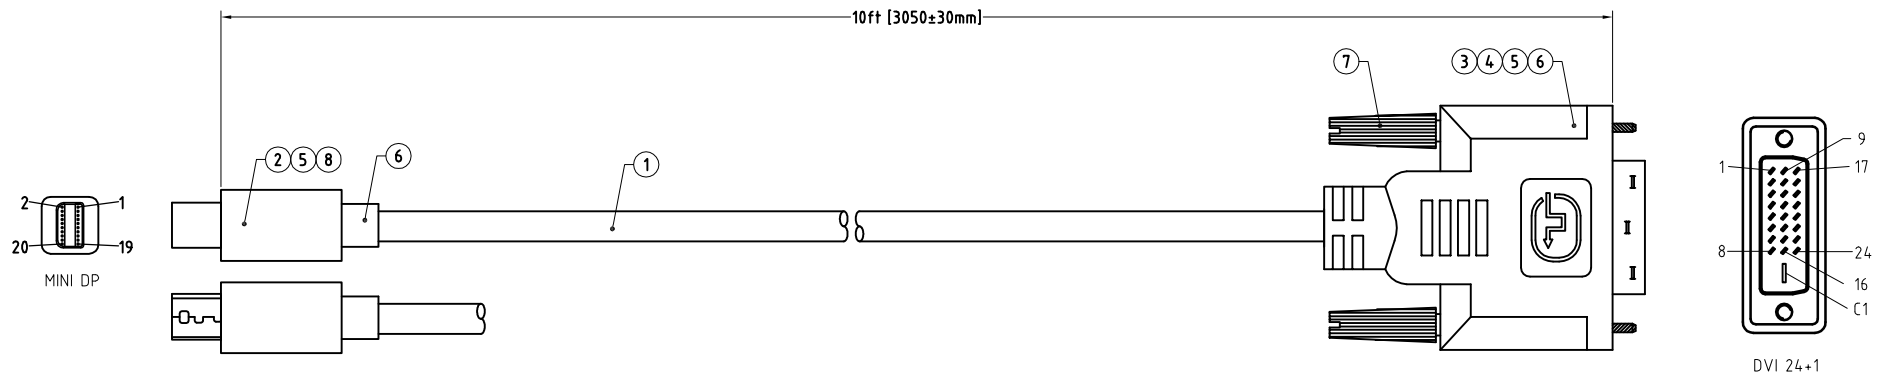

PIN ASSIGNMENT:


| Mini DP | DVI(24+1) |
|---------|-----------|
| 1 地 | Drain 11 |
| 3 红 | Red 12 |
| 5 白 | White 10 |
| 7 地 | Drain 8 |
| 9 橙 | Orange 9 |
| 11 白 | White 7 |
| 13 地 | Drain 5 |
| 15 黄 | Yellow 6 |
| 17 白 | White 4 |
| 8 地 | Drain 2 |
| 10 蓝 | Blue 3 |
| 12 白 | White 1 |
| 16 绿 | Green 15 |
| 18 白 | White 17 |
| 14 地 | Drain 16 |
| 19 白 | White 19 |
| 2 橙 | Orange 18 |
| 4 黄 | Yellow 13 |
| 6 地 | Drain 14 |
| 20 红 | Red 20 |

Wire Details




- (32AWG×1P+Drain+Al+Mylar)/5
Conductor:Tinned Copper 7/0.08mm
Insulation:FM-PE+Skin
- 32AWG/5C
Conductor:Tinned Copper 7/0.08mm
Insulation:HD-PE
- Al.Mylar
- Drain:Bare Copper 7/0.08mm
- Braid: Al-Mg,85%
- Jacket: PVC; Color: White
Ø6.0mm

PCB:



Label:
Size:50 x 20 mm



| NO. | PART NAME | SPECIFICATION DESCRIPTION | QTY | UNIT |
|-----|--------------|--|-----|------|
| ⑧ | Shell | Mini Display port 20 Pin Shell,ABS,White | 1 | SET |
| ⑦ | Thumbscrew | #4-40UNC,Ø2.8×L4.5mm,Nickel Plated,White PVC | 2 | PCS |
| ⑥ | Overmold | PVC,45Pa,White | N/A | G |
| ⑤ | Innermold | PE,Low density | N/A | G |
| ④ | PCBA | PTN3361BBS,Mini DP TO DVI | 1 | PCS |
| ③ | DVI_Conn | DVI(24+1)M,PIN G/F,Black Insulation,Steel-Shell(G/F Plated),Solder type | 1 | PCS |
| ② | Mini DP_Conn | Mini DisplayPort Male,Pin G/F,Black Insulation,Steel-Shell(G/F Plated),Solder type | 1 | PCS |
| ① | Cable | (32#TC×1P+D+M+A)×5+32#TC×5C+A+E+B(85%,Al-Mg)+PVC,White,OD:6.0mm | N/A | MM |



BestLinkNetworkware

| | | |
|-------------|---------------------|---|
| DRAWN BY | DATE: 2014/11/14 | DESCRIPTION: MINI DP M TO DVI-D(24+1) Cable,10FT |
| CHECKED BY | SHEET 1 of 1 | ITEM NO. 184042 |
| APPROVED BY | SCALE None | REV. 00 UNIT: mm |