

NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD


CABLE SPECIFICATION

Item	Unit	Specification
Awg	Awg	16#
No. of conductor	p,c	2C
Conductor	Material	--- 99.997% Oxygen Free Copper (OFC)
	Construction	No./mm 65/0.16BS±0.008
	Stranded diameter	mm 1.49
	Material	--- PVC
Insulation	Nom. Thickness	mm 0.41(Ref.)
Filler	Diameter	mm 2.30±0.1
	Color	--- red ,black
	Material	--- 420D NYLON
Jacket	Material	--- PVC
	Min. Thickness	mm 0.6
	Nom. Thickness	mm 0.75(Ref.)
	O.D	mm 6.2±0.2
	Color	--- White
Marking	E360310 (UL) CL2 SPEAKER CABLE 16AWG*2 STRANDED 001FT----250FT	
	Marking color:black	

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief description

Configuration:

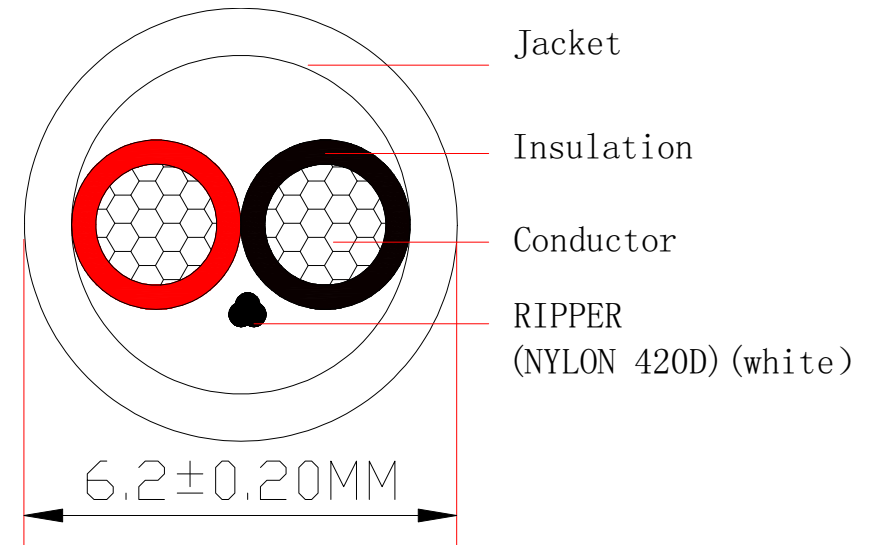

DRAWN BY	Joe	DATE:	DESCRIPTION		
CHECKED E	Jack		250Ft 16AWG/2C In-wall Speaker Wire, CL2 UL OD 6.2mm		
PPROVED B	Daniel		ITEM NO. 203724		
SCALE 1:1		REV.00	UNIT:mm		

NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

PRODUCT PACKAGING DIMENSIONS:


PAPER SPOOL PACKAGING:

SIZE: Ø240*60*5*H80mm; (1PC/1PC)



SPOOL LABEL:

W-0532spool label: OD235*ID70mm (2PCS/1PC)

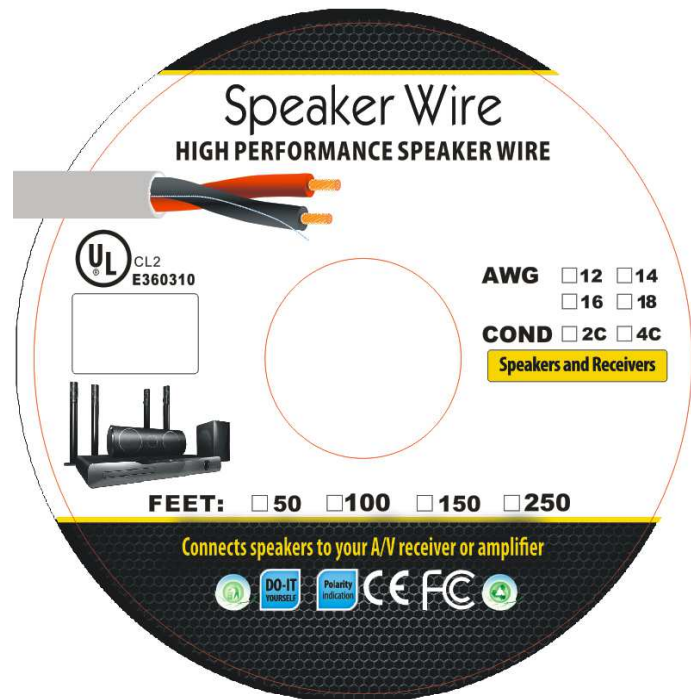


REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief description

LABEL:

203724 label ,size :50*30MM(1pc/spool) FM3-100FT-UL label(1PCS)

**250Ft 16AWG/2C
In-wall Speaker Wire,
CL2 UL OD 6.2mm**

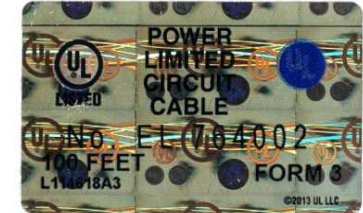

Label position:



DRAWN BY	Joe	DATE:	2014/12/24	DESCRIPTION	250Ft 16AWG/2C In-wall Speaker Wire, CL2 UL OD 6.2mm
CHECKED E	Jack			ITEM NO.	203724
PPROVED B	Daniel	SCALE 1:1	REV.00	UNIT:mm	

NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief description

Bestlink shipping mark

203724 Carton box ,K=K L50*W25*H20cm(4PCS/CTN)

Side Mark (Both side)

Main Mark (Both side)

P/O:1401948
P/N:203724
Q'TY: 4 PCS
C/NO.:

MADE IN CHINA

P/O:1401948
P/N:203724
Q'TY: 4 PCS
C/NO.:

MADE IN CHINA



P/N:203724
Q'TY: 4 PCS
N.W.: KGS
G.W.: KGS
Date Code: -2015
Vender Code:PS01052



DRAWN BY	Joe	DATE:	DESCRIPTION 250Ft 16AWG/2C In-wall Speaker Wire, CL2 UL OD 6.2mm		
CHECKED E	Jack				
PPROVED B	Daniel		ITEM NO. 203724		
SCALE 1:1		REV.00	UNIT:mm		