





NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

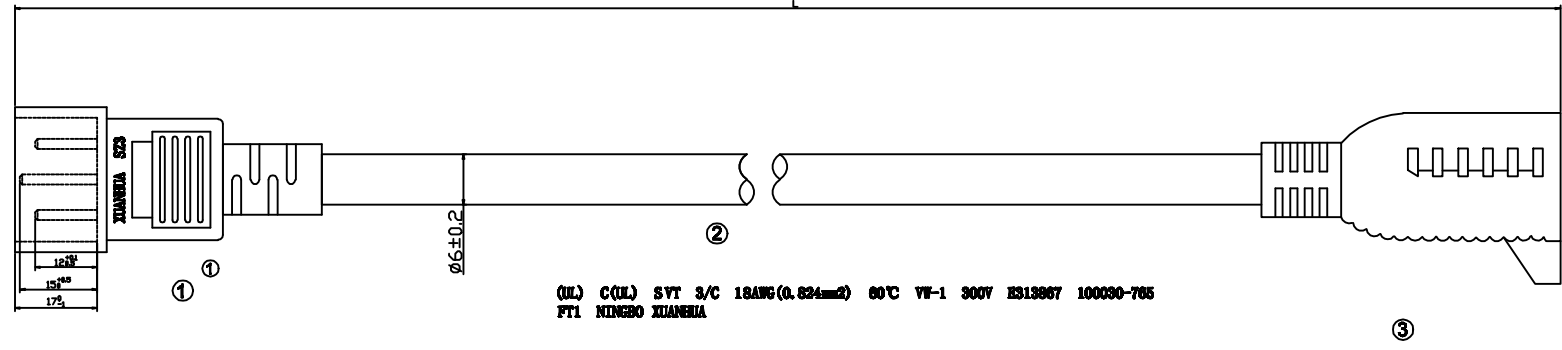

Number / Single Diameter(mm)	Insulation Thickness(mm)	Jacket Thickness(mm)	Wire Diameter(mm)	MAX.Conductor Resistance at 20 °C
4/10.160	0.38(0.33)	0.76 (0.62)	6.0±0.15	22.4

ITEM NO.	LENTH	T
210105BK	305	±20
210128BK	915	±20
210129BK	1830	±20

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	XH306	NEMA 5-15R E257089 BLACK	1	PCS
②	CABLE	SVT 18AWG*30 300V 60°C VW-1 E313867 FT1 BLACK	1	PCS
①	SZ3	Q14 E257089 BLACK	1	PCS

PART NO.	LENGTH mm	CARTON SIZE mm	QTY	NR/GW KG
210105BK	305	51×31×24	250	14.5/15
210128BK	915	51×31×24	100	11.5/12.3
210129BK	1830	51×31×24	100	17.5/18



DRAWN BY FENG	DATE: 2017-05-27	DESCRIPTION: SZ3/XH306 SVT 18AWG*30
CHECKED BY	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm