

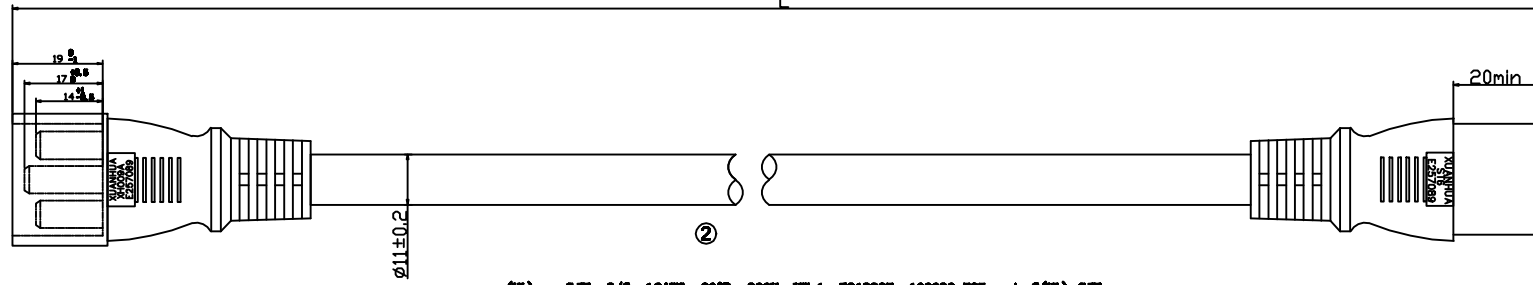



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description



(UL) SJT 3/C 12AWG 60°C 300V VW-1 E313867 100090-765 \* C(UL) SJT 3/C 12AWG(3.31mm<sup>2</sup>) 60°C 300V FT1 NINGBO XIANHEIA



Number / Single Diameter(mm)	Insulation Thickness(mm)	Jacket Thickness(mm)	Wire Diameter(mm)	MAX. Conductor Resistance at 20 °C
65/0.254	0.76(0.69)	1.14(0.91)	11±0.2	5.88

PART NO.	LENGTH mm	CARTON SIZE mm	QTY	NW/GW KG
210360BK	305	51×31×24	100	16/16.5
210361BK	610	51×31×24	70	19.5/20
210362BK	915	51×31×24	40	19/19.5



DRAWN BY	FENG	DATE:	2017-06-10	DESCRIPTION:	XH009A/ST6 SJT 12AWG*30
CHECKED BY		SHEET	1 of 1	ITEM NO.	
APPROVED BY		SCALE	1:1	REV.	00

210360BK	305	±20
210361BK	915	±20
210362BK	1830	±20

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	ST6	019 E257089 BLACK	1	PCS
②	CABLE	SJT 12AWG*30 300V 60°C VW-1 E313867 FT1 BLACK	1	PCS
①	XH009A	020 E257089 BLACK	1	PCS