

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description



E-LIT PANEL

UL 2'X2'

The UL listed edge light panel is designed to the most energy saving panel with 130lm/w max, 100,000 hours long life, and 90% uniformity across the emitting surface.

UL, FCC, DLC, DLC Premium Listed.

The panel enables customers to recover initial investment quickly and greatly reduce the maintenance cost.

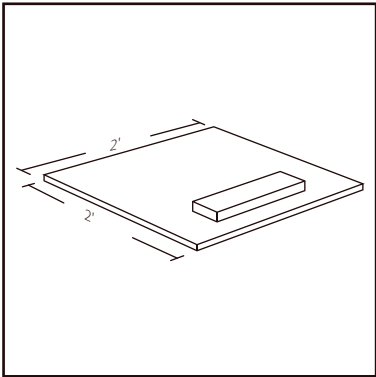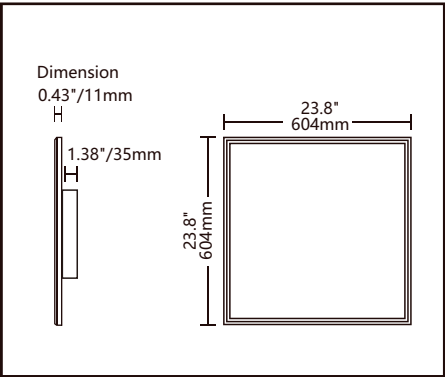

Input Power	40W
Product Dimensions	2'x2'(604x604mm)
LED Driver Input	100-277VAC 50/60Hz
Driver Output Data	25-38Vdc / 1030ma /36W
Driver / Connection	>Fixed Driver
Over Load / Short Circuit	Protection
Surge Protection Class	>1KV/ Class II
Color temperature	NW Natural white 5000K
LED Type	20X35mil Chip
LED Quantity	108 Pcs
Average Life	30,000 Hours/5Years
IP Grade	IP 20

Certification

- UL, DLC/DLC Premium, FCC,CUL Lighting Fact

			
DRAWN BY	DATE: 2016/09/05	DESCRIPTION: 2'2 LED PANEL LIGHT	
CHECKED BY	SHEET 1 of 1	ITEM NO. 210825	
APPROVED BY	SCALE 1: 1	REV. 00	UNIT:mm

③				
②				
①				
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT

Unless specified on the drawing,tolerances are per the follows:
.
.x +1
.xx +0.2
+0.05