

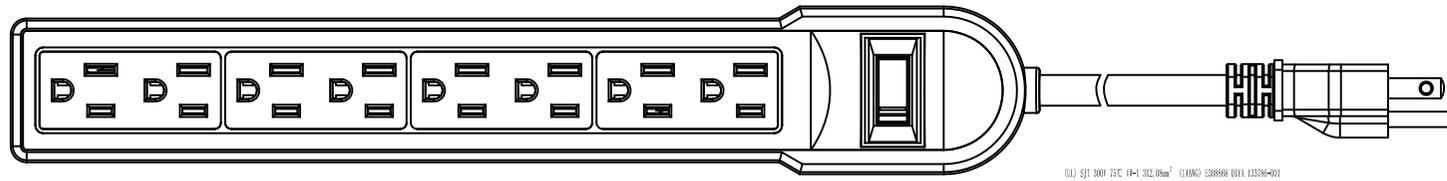
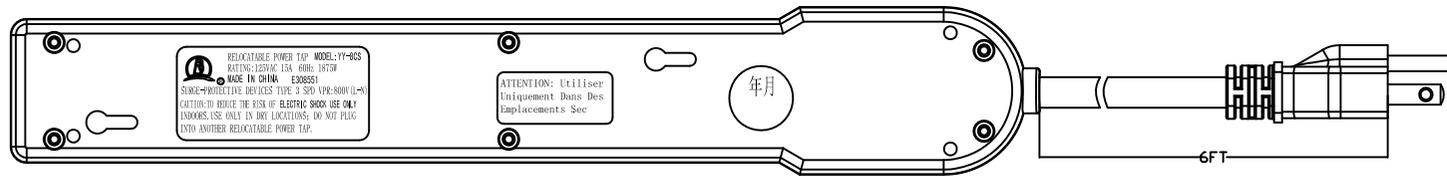



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

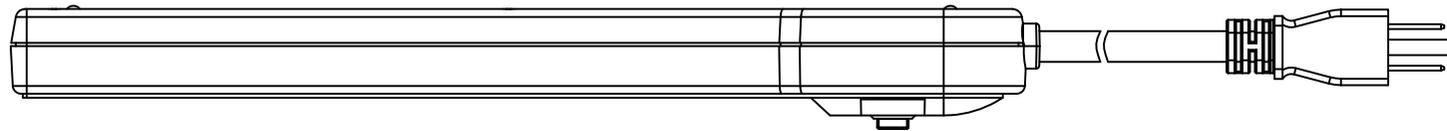

0.11 SFT 3001 75°C 1P-1 302.09mm² (14AWG) E308888 001A 133284-001



RELOCATABLE POWER TAP MODEL: YV-80S
 RATING: 125VAC 15A 60Hz 1875W
 MADE IN CHINA E308851
 SURGE-PROTECTIVE DEVICES TYPE: S SPD VPR-8000 (L-N)
 CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, USE ONLY
 INDOORS, USE ONLY IN DRY LOCATIONS; DO NOT PLUG
 INTO ANOTHER RELOCATABLE POWER TAP.

ATTENTION: Utiliser
 l'unique dans Des
 Emplacements Sec

年月

6FT



BestLinkNetware

DRAWN BY	DATE: 2012/09/08	DESCRIPTION: 6Ft 8 Outlet Surge Protector
CHECKED BY	SHEET 1 of 1	ITEM NO. 215060
APPROVED BY	SCALE	REV. 00 UNIT: mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				

Product Specification

Item no	215060	Description:	8 Outlet Power Strip with Surge	
Photo(s)		Color	Indent Marking based on cULus or equivalent standard	
		Grey	(ETL)us ETL#____SJT 3X14AWG 60°C 300V VW-1 c(ETL) SJT 3X2.08mm2 (14AWG) FT2	
		Raw Material		
		Plastic: ABS 134g		
		Copper Strip: 14.6g		
Key Features & Specs		ON/OFF Swith: with Light	Compound Requirement	
Male Blades:UL CUL Recognized Components(NEMA-5-15P) Female Contacts:UL CUL Recognized Components(NEMA-5-15P) Female Ground:UL CUL Recognized Components(NEMA-5-15P) Label:UL CUL required Agency Approvals:ETL Listing Rate: AC 15A 125V 60Hz 1875W Maximum Surge: 7000Amp,6000V,90J		Cabel: 3C SJT 14AWG 2.5FT	PVC 60°C Insulation Compound Approved for SJT Cable	
		Jacket Construction		Cold Bend Test Requirement
		100% Fully Pressure Extruded Jacket		Must pass cold bend test at -20°C
Test				
Hipot test @1.5KV Power test @ with light can light Drop test @70cm Grounded test@ with ground equirement				
ETL file #	UL file #	CSA/UL file #		
	E308551		Date: 2011.11.15	