



# BL-610LV

## In-Wall Speaker

### Key features:

- ▶ 2-Way system with soft dome tweeter design.
- ▶ High quality crossover components for superior sonic reproduction.
- ▶ White polypropylene cone and high damping rubber surround, powerful bass.
- ▶ Easy Rotary Lock Clamp mounting system.
- ▶ High power, excellent sound.
- ▶ Enclosed speaker offer warm sound.

### Application:

This in-wall speaker delivers superior sound and clear intelligibility in a variety of ceiling environments.


It can be easily installed in hard-surfaced ceilings, suspended ceilings and new constructions via a front-mounted easy rotary lock clamp. The low-distortion speaker design, coupled with a computer-matched venting system, delivers high intelligibility and exceptional low-frequency response for both music and speech reinforcement.



### Specifications:


Rated Impedance:	8 Ω ±15% at - 500 Hz
Rated Power:	40 W
Max.Power:	80 W
Sensitivity(1W/1M):	88 dB ± 3 dB, 1 W/M at 400,500,600,700 Hz-Avg
Frequency Range :	90 Hz-20 KHz -10 dB / ± 20% Hz
Resonance Frequency:	140 Hz ± 20%
Whistling:	9 Volts
D.C Resistance (Rdc):	6.2 Ω ±10%
Magnet:	Ferrite
Membrane:	PP cone and rubber surround
Termination:	Binding Post
Baffle:	ABS / White
Mesh Grille:	Alu
Dimension:	306.5(L) * 220(W) * 106.5(D)mm
Weight:	2.36 KGS

# BL-610LV



**BestLinkNetworkware**<sup>®</sup>  
www.bestlinknetworkware.com inc.

## Frequency Response BL-610LV

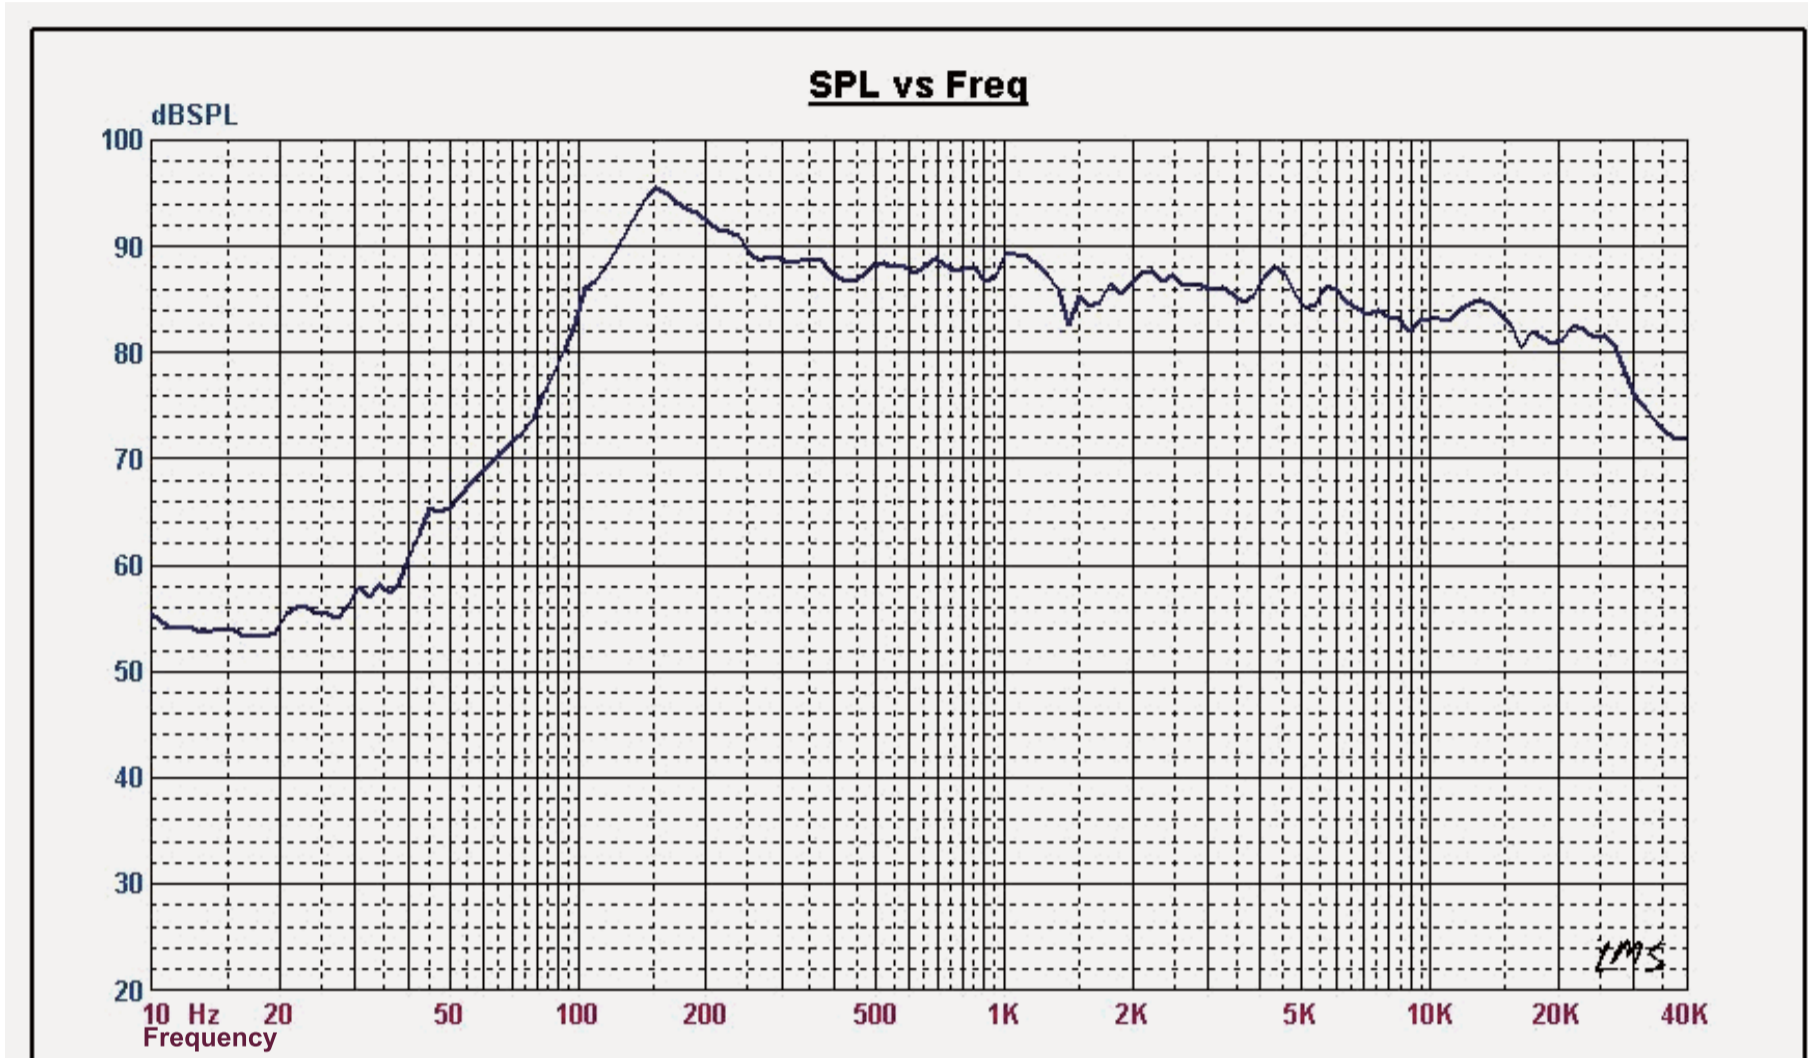

## Dimensional Drawings BL-610LV (dimensions in millimeters)

