



BL-610L

In-Wall Speaker

Key features:

- ▶ 2-Way system with soft dome tweeter design.
- ▶ High quality crossover components for superior sonic reproduction.
- ▶ Easy Rotary Lock Clamp mounting system.
- ▶ High power, excellent sound for home, theater installation.
- ▶ White aluminum mesh grille.

Application:


This in-wall speaker delivers superior sound and clear intelligibility in a variety of ceiling environments. It can be easily installed in hard-surfaced ceilings, suspended ceilings and new constructions via a front-mounted easy rotary lock clamp. The low-distortion speaker design, coupled with a computer-matched venting system, delivers high intelligibility and exceptional low-frequency response for both music and speech reinforcement.



Specifications:


Rated Impedance:	8 Ω \pm 15% at - 600 Hz
Rated Power:	40 W
Max.Power:	80 W
Sensitivity(1W/1M):	86 dB \pm 3 dB, 1 W/M at 400,500,600,700 Hz-Avg
Frequency Range :	40 Hz-20 KHz -10 dB / \pm 20% Hz
Resonance Frequency:	68 Hz \pm 20%
Whistling:	9 Volts
D.C Resistance (Rdc):	6.2 Ω \pm 10%
Magnet:	Ferrite
Membrane:	PP cone and rubber surround
Termination:	Push Terminal
Baffle:	ABS / White
Mesh Grille:	Alu
Dimension:	306.5(L) * 220(W) * 91.3(D)mm
Weight:	1.81 KGS

BL-610L



BestLinkNetware[®]
www.bestlinknetware.com inc.

Frequency Response BL-610L

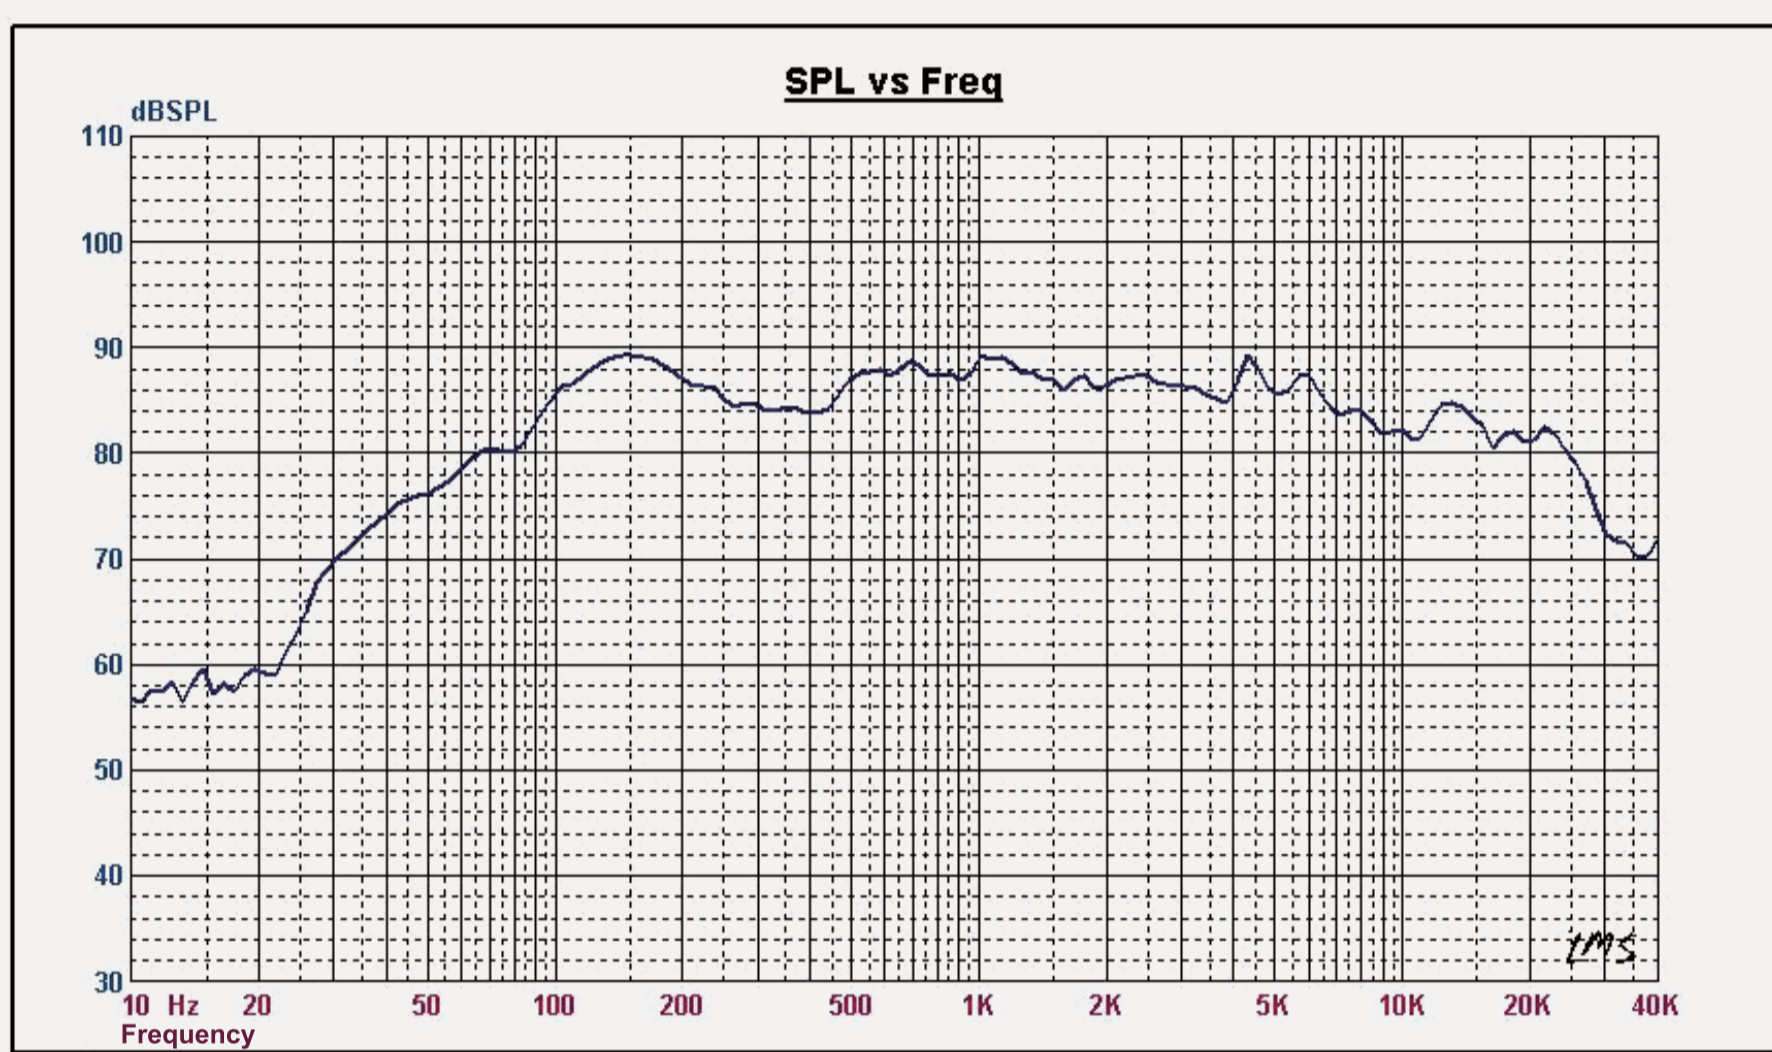

Dimensional Drawings BL-610L (dimensions in millimeters)

