




TD-532A



FEATURES

- 32 CH HD TVI record and playback
- H.264 & Dual-stream video compression
- Support HD TVI / Analog / IP camera triple hybrid
- Support both HD TVI and analog cameras with adaptive access
- 32 CH 720P @ 30fps
- 32 CH 1080P @ 15fps
- HDMI and VGA output at up to 1920 x 1080P resolution
- Long transmission distance over coax cable
- Support up to 32 CH synchronous playback at 1080P resolution
- 4 SATA up to 6TB
- 16 Alarm Input / 4 Alarm Output
- 100~240V AC

REAR PANEL

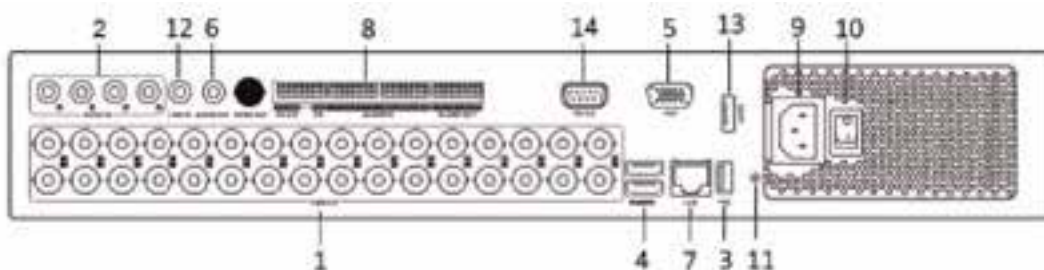

1. Video In
2. Audio In, RCA Connector
3. USB Port
4. HDMI Interface
5. VGA Interface
6. VGA Audio Out

7. LAN Network Interface
8. RS-485 Serial Interface, Keyboard Interface, Alarm In and Alarm Out

9. 100~240V AC Power Input
10. Power Switch
11. GND

12. Line In
13. eSATA Interface
14. RS-232 Serial Port

SPECIFICATIONS

Model	TD-532A
Video Compression	H.264
Analog & HD TVI Video Input	32 CH BNC (1.0Vp-p, 75 Ω)
IP Input	8CH up to 32CH (1080p @ 30fps)
Audio Compression	G.711u
Audio Input / Two-way Audio In	4CH, RCA (2.0 Vp-p, 1 kΩ) / 1CH, RCA (2.0 Vp-p, 1 kΩ)
HDMI / VGA Output	1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz
Encoding Resolution	Main stream: 1080P(non-real-time) / 720P / VGA / WD1 / 4CIF / CIF Sub-stream: WD1(non-real-time) / 4CIF(non-real-time) / CIF / QCIF / QVGA
Frame Rate	Main stream: 1/16 fps ~ Real time frame rate Sub-stream: 1/16 fps ~ Real time frame rate
Video Bitrate	32 Kbps-4 Mbps
Audio Output	1-ch, RCA (Linear, 1KΩ)
Audio Bitrate	64 Kbps
Dual Stream	Supported
Stream Type	Video, Video & Audio
Playback Resolution	1080P / 720P / VGA / WD1 / 4CIF / CIF / QVGA / QCIF
Synchronous Playback	32 CH
Remote Connections	128
Network Protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS
SATA HDD	4 SATA Interfaces for 4 HDDs; 1 eSATA interface
Hard Disk Capacity	Up to 4 TB capacity for each disk
Network Interface	1; 10M / 100M / 1000M self-adaptive Ethernet
Serial Interface	RS-232, RS-485, Keyboard
USB Port	3x USB 2.0
Alarm Input / Output	16 / 4
Power Source	100 ~ 240VAC, 47 ~ 63HZ
Power Consumption	≤ 65W
Working Temperature	14°F ~ 131°F / -10°C ~ 55°C
Working Humidity	10% ~ 90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimensions	17.5 x 15.3 x 2.7 inches / 445 x 390 x 70 mm
Net Weight	11 lbs / ≤ 5Kg

*Specifications and appearance are subject to change without notice

PACKAGE CONTENTS

- One (1) TVI DVR
- One (1) Remote Control
- One (1) Mouse
- Four (4) SATA Cables
- One (1) Y SATA Power Cable
- One (1) 100~240V AC Power Supply
- One (1) Power Cord
- Eight (8) HDD Screws
- One (1) User Manual with CD