



VRLA Rechargeable Battery

BC12-12



FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- Absorbent Glass Mat technology for efficient gas recombination

APPLICATION

- UPS
- Fishing Lights
- Power Packs
- Laboratory Equipment



SPECIFICATIONS

Nominal Voltage	12V
Nominal Capacity	12.00 Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	3350g(7.39lbs.)
Terminals	T2 (Faston Tab 250)
Internal Resistance	≤ 18mΩ(Fully Charged)
Max. Discharge Current	180 A (5 sec.)
Max. Charge Current	3.6 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL 94-HB) BC12-12 Optional: Flame Retardant ABS(UL 94-V0) BC12-12FR

WSF **ISO9001** MH19884

WSF **ISO14001** **CE** CCM20310-2474-E-16

WSF **OHSMS**

- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

Length

151±1.5 (5.94±0.06)

Width


98±1.5 (3.86±0.06)

Container Height


94±1.5 (3.70±0.06)

Total Height

98±2.0 (3.86±0.08)

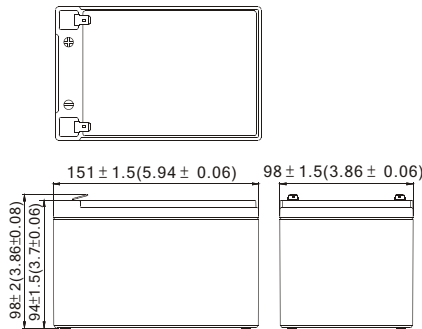

Terminal T2



Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	433.9	319.4	256.0	152.3	87.3	35.0	24.1	13.48	7.09
1.75V	502.2	346.0	267.7	158.1	90.0	35.7	24.5	13.68	7.20
1.70V	533.6	358.5	276.0	161.7	91.6	36.0	24.6	13.75	7.24
1.65V	557.5	367.1	282.4	164.0	92.7	36.3	24.7	13.79	7.26
1.60V	576.0	374.4	288.0	165.6	93.6	36.5	24.8	13.79	7.26

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	39.09	28.12	22.26	12.91	7.34	2.91	2.01	1.123	0.591
1.75V	46.07	30.46	23.28	13.40	7.56	2.97	2.04	1.140	0.600
1.70V	48.95	31.55	24.00	13.70	7.70	3.00	2.05	1.146	0.603
1.65V	51.15	32.31	24.55	13.89	7.79	3.02	2.06	1.149	0.605
1.60V	52.84	32.96	25.04	14.03	7.87	3.04	2.06	1.149	0.605

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

For operation, please refer to the instruction from technical manual.

A/0 REV. Mar. 2014

Powered by **B.B. Battery Co., Ltd.**