MOLDING

DATE	REV.	REVISION	DRAFTING	CHECKED
2019.05.16	A/0	NEW	FQ	ZCY

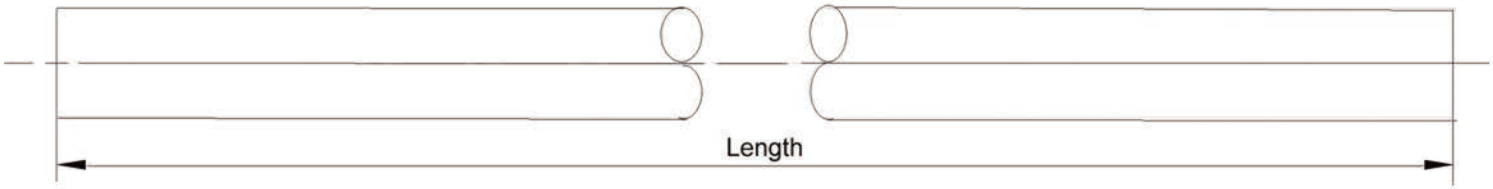

Marking: CATEGORY6 23AWG 4PR UTP GEL OUTDOOR UV VERIFIED CONFORMS TO ANSI/TIA568C.2 RoHS 1000FT

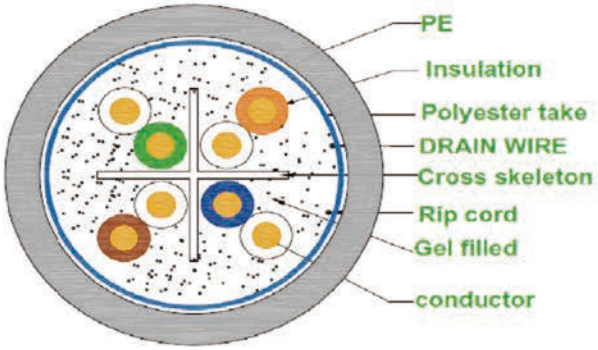

CROSS-SECTION OF CABLE

Parameter(20°C)	
Item	Specified Value
Conductor resistance	≤ 9.5Ω/100m
Rated Temperature	-40~ 60℃

Packing				
Part No.	Color	Length (ft)	Wood axion	
			Size(cm)	
100968BK	Black	1000	D37xH27	



BESTLINK NETWARE

Unless specified on the drawing, tolerances are per the follows:

X. ±0.20 X° ±3
.X ±0.10 .X° ±0.3
.XX ±0.05

DRAW. NO		TITLE	LAN CABLE Cat. 6 UTP 23AWG Gel-filled Direct Burial Solid Cable, 1000ft.		
CUSTOMER					
CUST'R P/N	100968BK	DRAW	FQ	DATE	2019.05.16
SCALE		CHECK	ZCY	DATE	2019.05.16
UNIT	mm	APPROVED	YB	SHEET	

Material	Part Number	Note	RoHS	Reach	GP	HF	Other