



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2014.02.20	Vinci	NEW

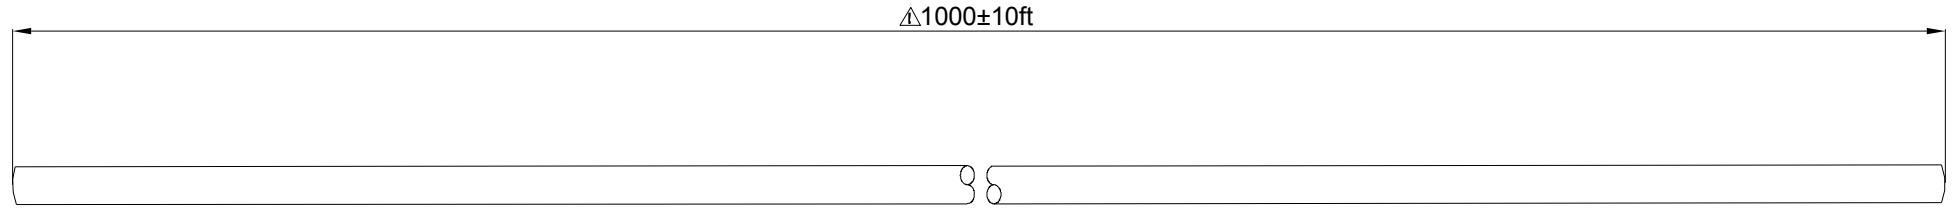


Marking: YFC CAT.6 23AWGX4PR SSTP IEC 60332.1 INSTALL CABLE - CONFORM TO ISO/IEC 11801 & (FP0779) EN 50288 & ANSI/TIA-568-C.2 3P ETL VERIFIED ▲ CMX(UL) C(UL) CMH E164469-XX XXXXFT

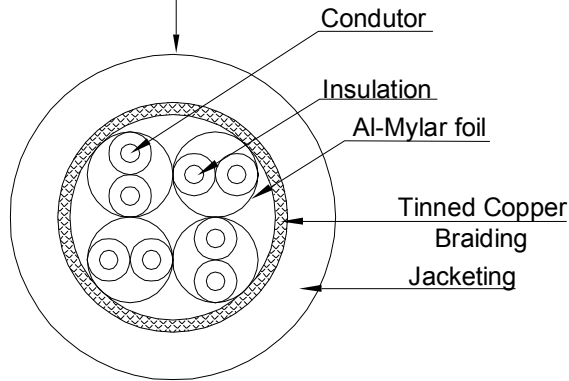

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

Wooden Spool
1,000ft / Reel
Film Wrapped

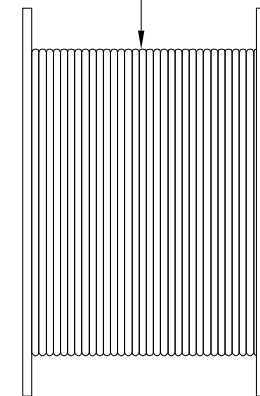

⑤	Wire	CAT.6 SSTP SLD 23AWGX4P	1	PCS
④	Braiding	Tinned Copper	1	PCS
③	Conductor	Bare Copper 23AWG	8	PCS
②	Insulation	Thickness:MIN at any point:0.38mm MAX AVG:0.42mm Diameter:1.38±0.06mm	8	PCS
①	Jacketing	Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:7.2±0. 2mm,PVC,GY177	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DRAWN BY	Vinci <small>研發課 2014.02.20</small>	DATE:	2014.02.20	DESCRIPTION:	CAT.6 SSTP SLD 23AWGX4P PVC 1000ft L-755 GY177
CHECKED BY	蔡秀云	SHEET 1 of 1		ITEM NO.	101004GY
APPROVED BY	<small>研發課 2014.02.20 Candy</small>	SCALE 1:1		REV. 00	UNIT: mm