



VERSION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

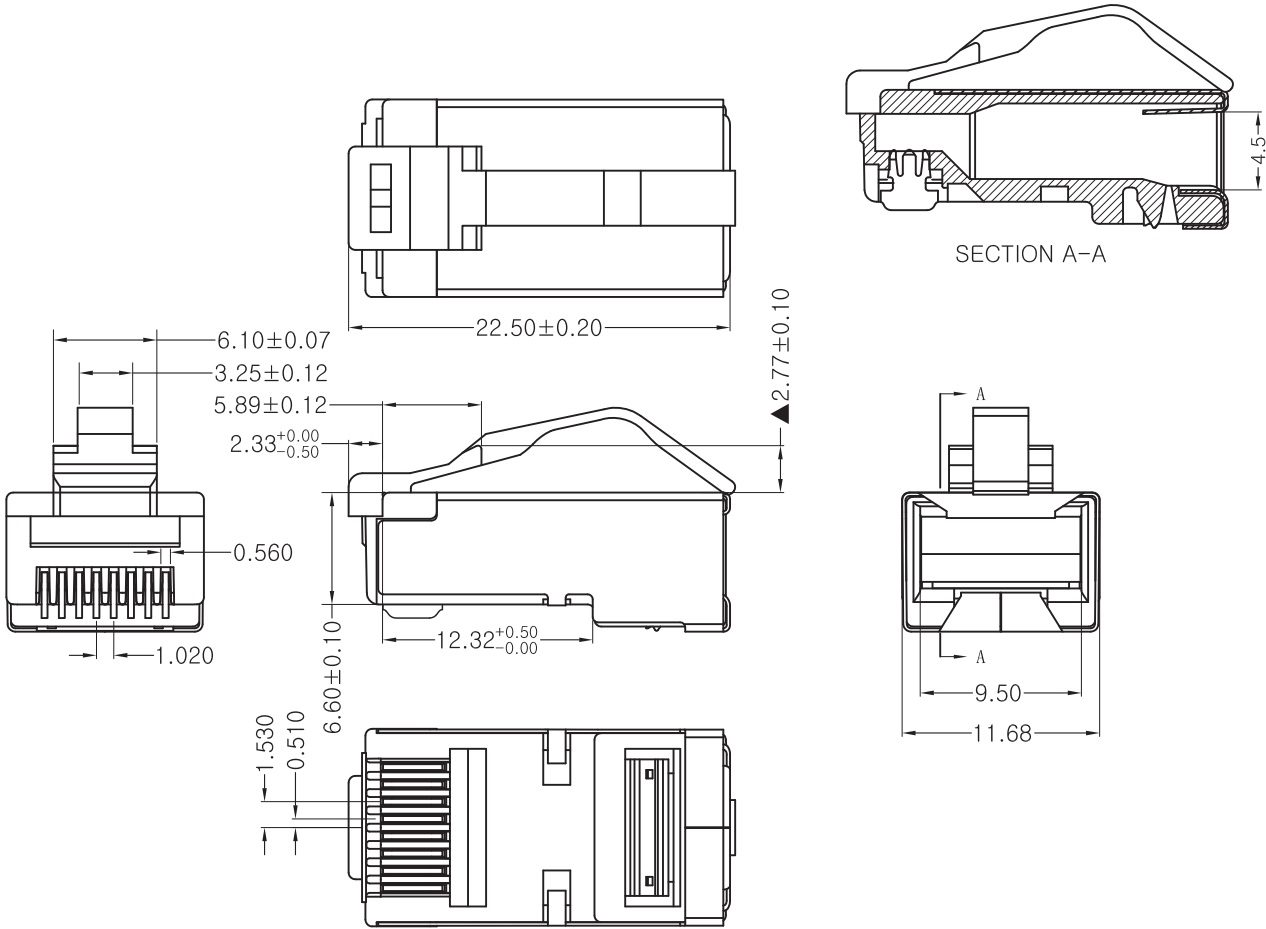







- NOTES:
- 1.Operation Temperature:-40℃～+85℃.
 - 2.Electrial Characteristics:
 - 2.1>Rated Current : 125V AC,1.5A@25℃.
 - 2.2>Contact Resistance : 20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown
 - 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force : 30N Max.
 - 3.2>Durability:750 cycles Min.
 - 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS, and REACH etc.
 - 5.Compatible wire gauge:26~23AWG
Compatible outer diameter:5.5~6.8MM

1	Modular Plug	Shell	1PCS	Square hole	Au: G/F" ☐ 1u" ☐ 3u" ☐ Ni:80u" ☒	Brass ☒ Spcc ☐
		Contacts	8PCS	2 Prongs ☐ 3 Prongs ☒	G/F" ☐ 1u" ☐ 3u" ☐ 6u" ☐ 15u" ☐ 30u" ☐ 50u" ☒ other ☐	Brass ☒ Phosphor copper ☐
		Housing	1PC	Transparent PC		94V-2 ☒ 94V-0 ☐
NO.	NAME		QTY	DESCRIPTION		MATERIAL

DRAWN BY FW	DATE: 2026/04/29	DESCRIPTION: RJ45 Cat6A STP Tangle Free Plug 50Micron Gold Plated 26AWG 100pk	
CHECKED BY ACE	SHEET 1 of 3	ITEM NO. 101237	
APPROVED BY	SCALE 1:1	REC. 00	UNIT: mm



VERSION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

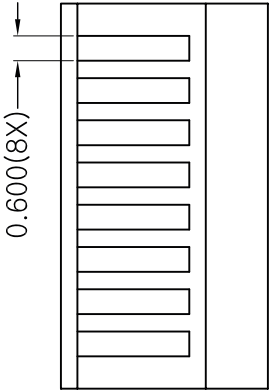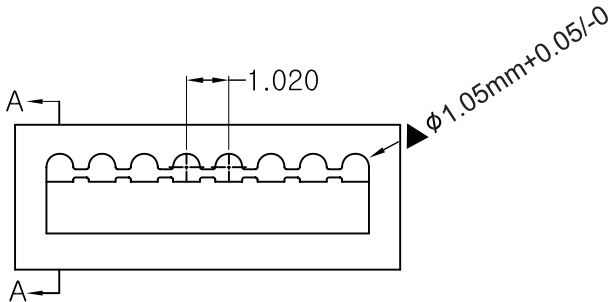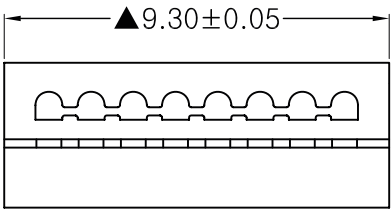



DRAWN BY FW	DATE: 2026/04/29	DESCRIPTION: RJ45 Cat6A STP Tangle Free Plug 50Micron Gold Plated 26AWG 100pk	
CHECKED BY ACE	SHEET 2 of 3	ITEM NO. 101237	
APPROVED BY	SCALE 1:1	REC. 00	UNIT: mm 