
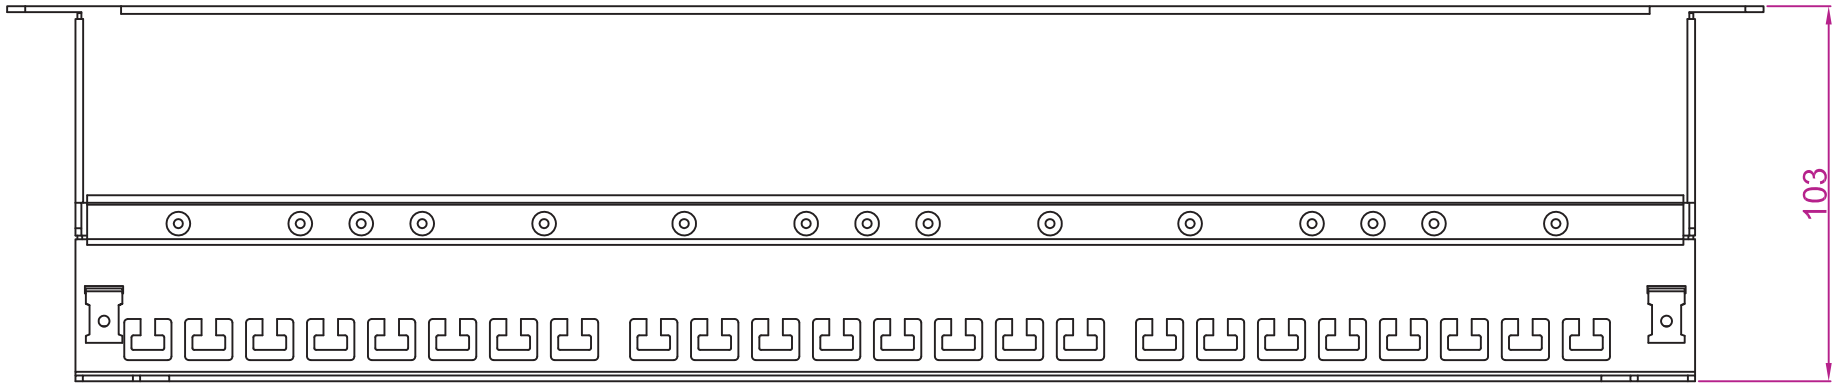
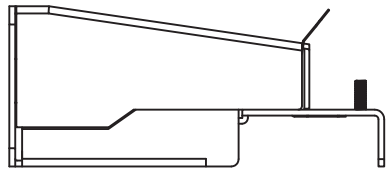
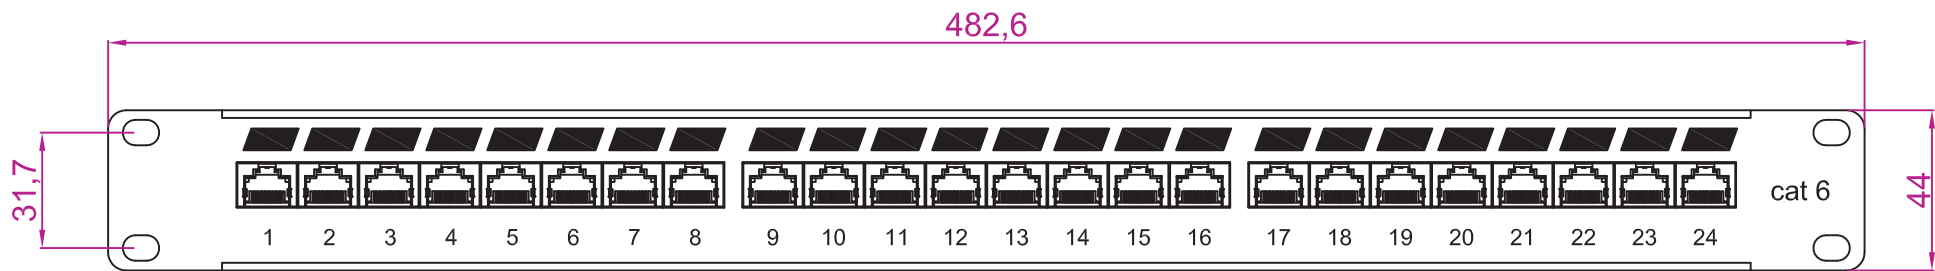



NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

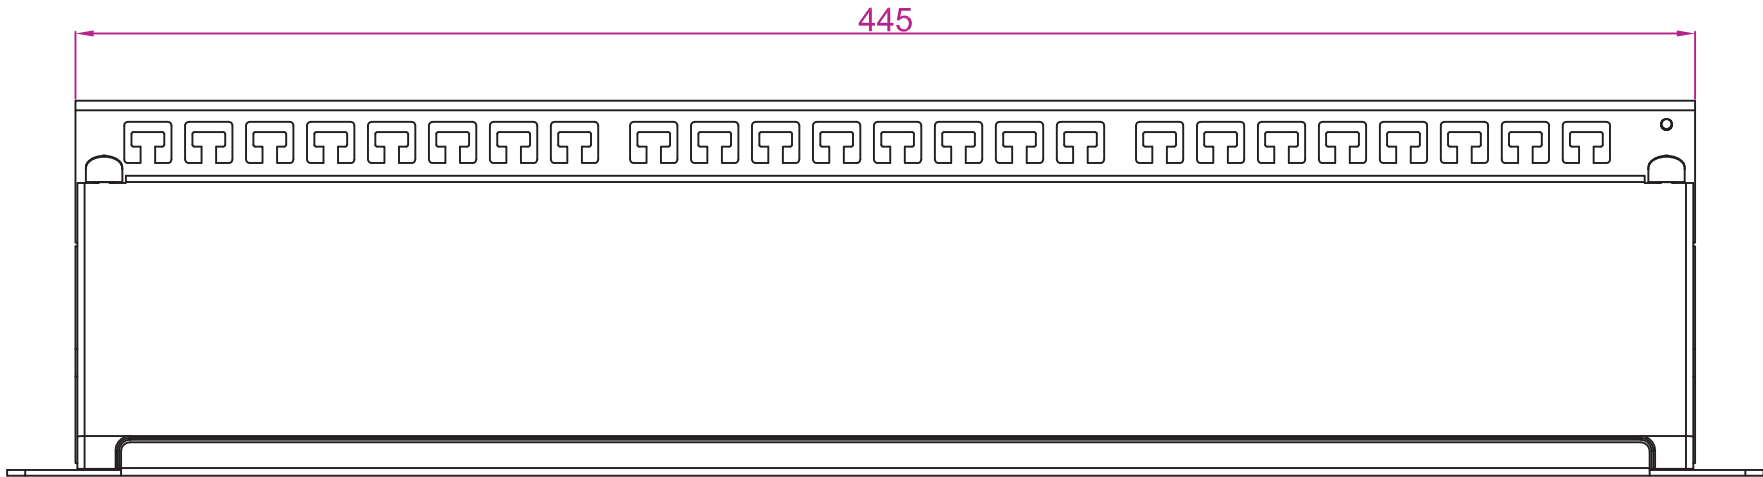

ACCORDING TO ANSI/TIA-568-C.2
REQUIREMENTS
C6 CHANNEL COMPLIANT

Cat 6
56Y4
E145249

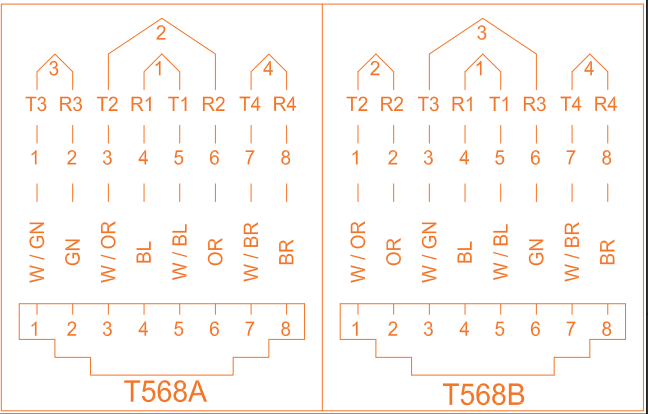

Physical Specification

Panel, Bracket: SPCC
Jack Housing: PBT UL94V-0
Spring PIN:Phosphor Bronze C5210,t=0.35mm.Plating 120u" Matte Tin over 60u" Nickel undercoat, besides Plating 50u" Gold over the plated surface on contact area.
PIN Holder: PBT UL94V-0. PCB: FR-4 IDC Housing: PC UL94V-0
IDC Contact: Phosphor Bronze C5191, t=0.4mm, 200u" Matte Tin over 100u" soft Nickel undercoat
Insertion Life: 750 mating cycles with FCC compliant RJ-45 plug
Contact Force: 100 grams with FCC compliant RJ-45 plug
Plug Retention Force:11lbf min
Durability: 200 termination cycles
Contact Compatibility: Accommodates 22 to 26 AWG solid/24 AWG stranded
Operating Temperature Range:-10℃ to 60℃
Storage Temperature Range:-40℃ to 68℃
Humidity:10%~90%RH




③				
②				
①	Cable Ties	3*100mm	12	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT

Unless specified on the drawing,tolerances are per the follows:
.x +1
.xx +0.2
.xx +0.05


DRAWN BY WJH		DATE: 2018/05/02	DESCRIPTION: 24 Port Cat.6 Shielded Patch Panel	
CHECKED BY		SHEET 1 of 2	ITEM NO. 102188	
APPROVED BY		SCALE 1:3	REV. 00	UNIT:mm

NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

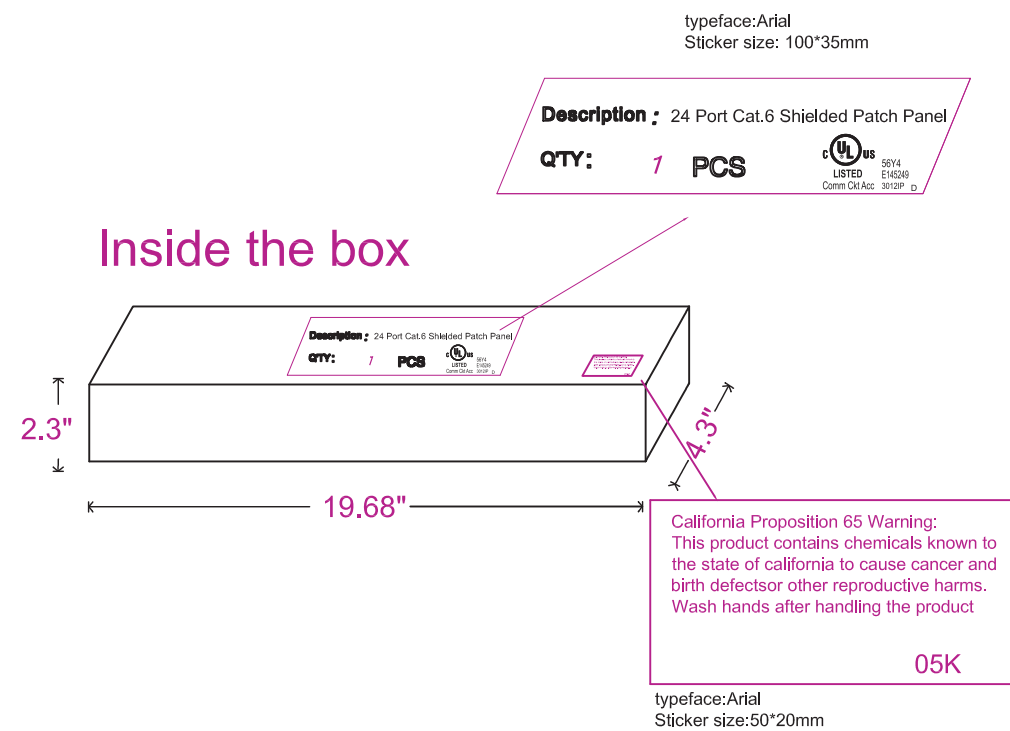


Outside the box

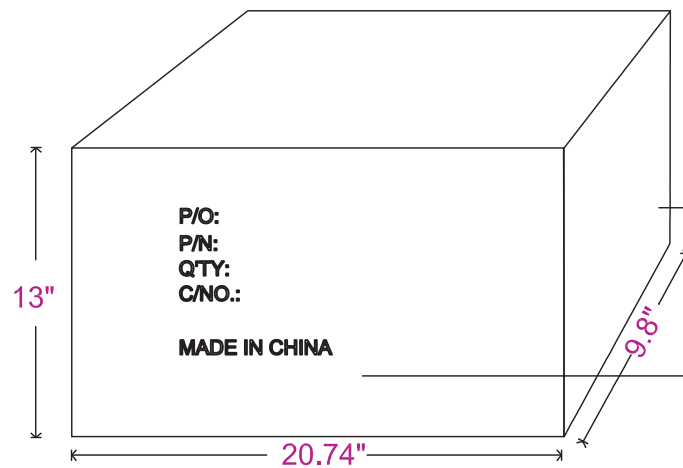

Side Mark

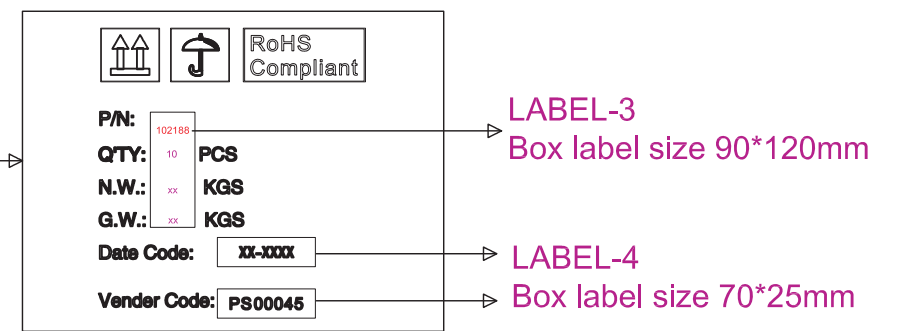

Main Mark

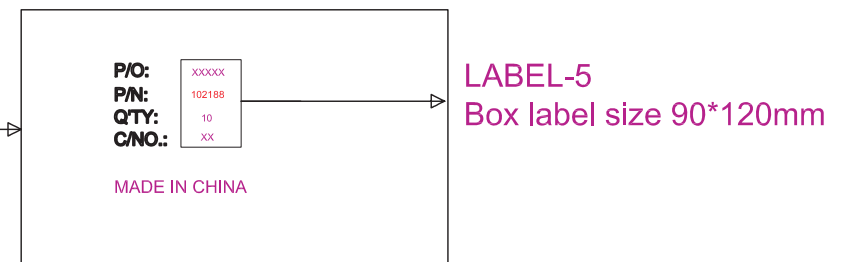

Unit package
Size:19.68"(L)*4.3"(W)*2.3"(H)
Weight:XXLBS

Carton Size: 20.74"(L)*9.8"(W)*13"(H)
Carton Quantity: 10PCS
Carton Weight: XXLBS



③					Unless specified on the drawing,tolerances are per the follows: .x +1 .x +0.2 .xx +0.05	DRAWN BY	WJH	DATE:	2018/05/02	DESCRIPTION: 24 Port Cat.6 Shielded Patch Panel	
②						CHECKED BY		SHEET	1 of 2	ITEM NO. 102188	
①						APPROVED BY		SCALE	1:3	REV.00	UNIT:mm
NO.	PART NAME	SPECIFICATION DESCRIPTION		QTY	UNIT						