


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
------	-----------	-------------	-------------------

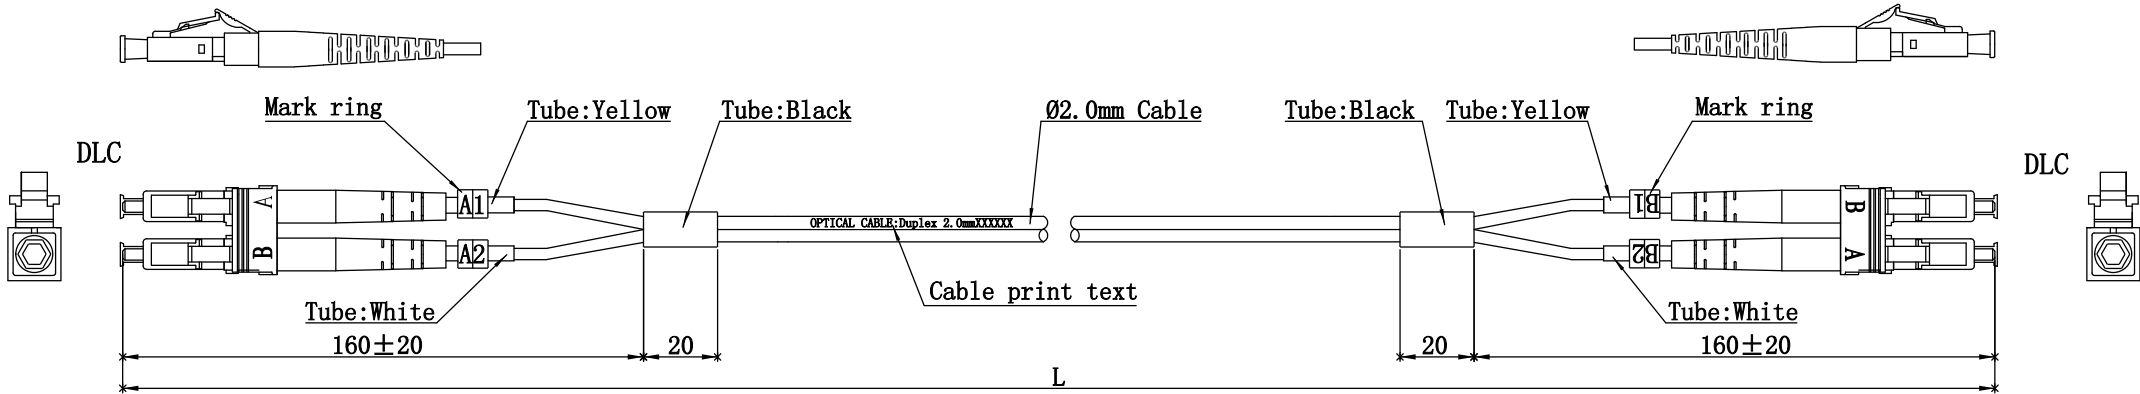


Specifications:

Type	DLC/UPC-DLC/UPC
Fiber Mode	OM3
Core Diameter(um)	50/125
Operating Wavelength(nm)	850/1300
Cable Color	Aqua
Cable Diameter(mm)	Ø2.0
Operating Temperature(° C)	-40~+75
Storage Temperature(° C)	-40~+85
Insertion loss(dB)	≤0.2dB
Return loss(dB)	≥35dB

$L \leq 5m$, TOLERANCES: $0 \leq \Delta L \leq 5cm$
 $L > 5m$, TOLERANCES: $0 \leq \Delta L \leq 1\% * L$

Length	Item #
1m	102615
1.5m	102680
2m	102616
3m	102617
4m	102681
5m	102618
6m	102682
7m	102683
8m	102684
9m	102685
10m	102619
12m	102686
15m	102620
20m	102919
25m	102920
30m	102921
35m	102922
40m	102923
50m	102924

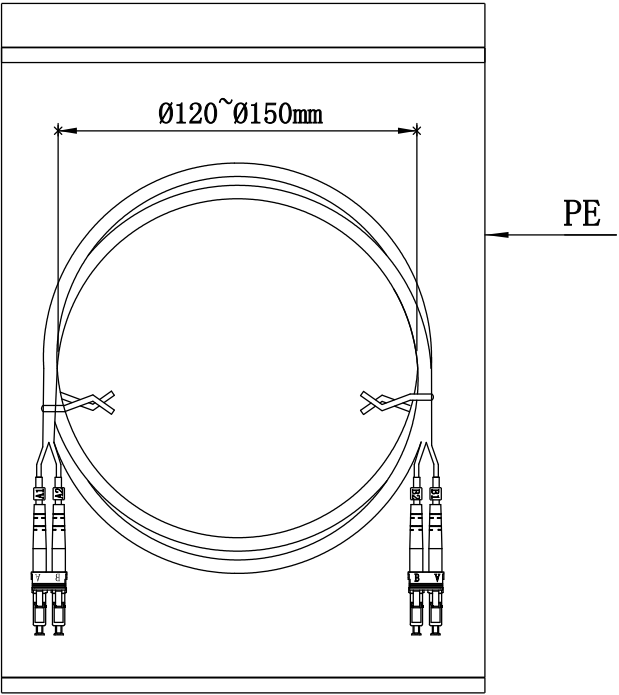

①				
②				
③				
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

Unless specified on the drawing,
tolerances are per the follows:

.X +1
.XX +0.2
.XXX +0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: LC-LC-DX OM3 Patchcord
CHECKED BY	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00
	UNIT:mm	