
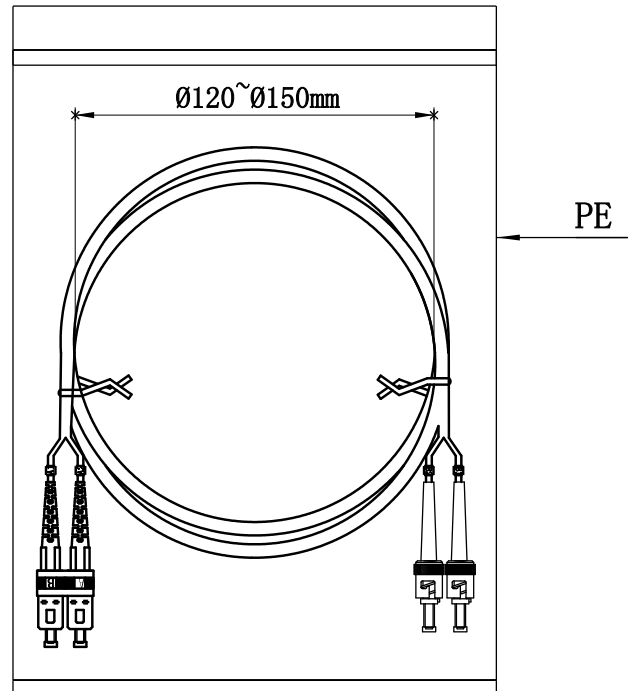


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

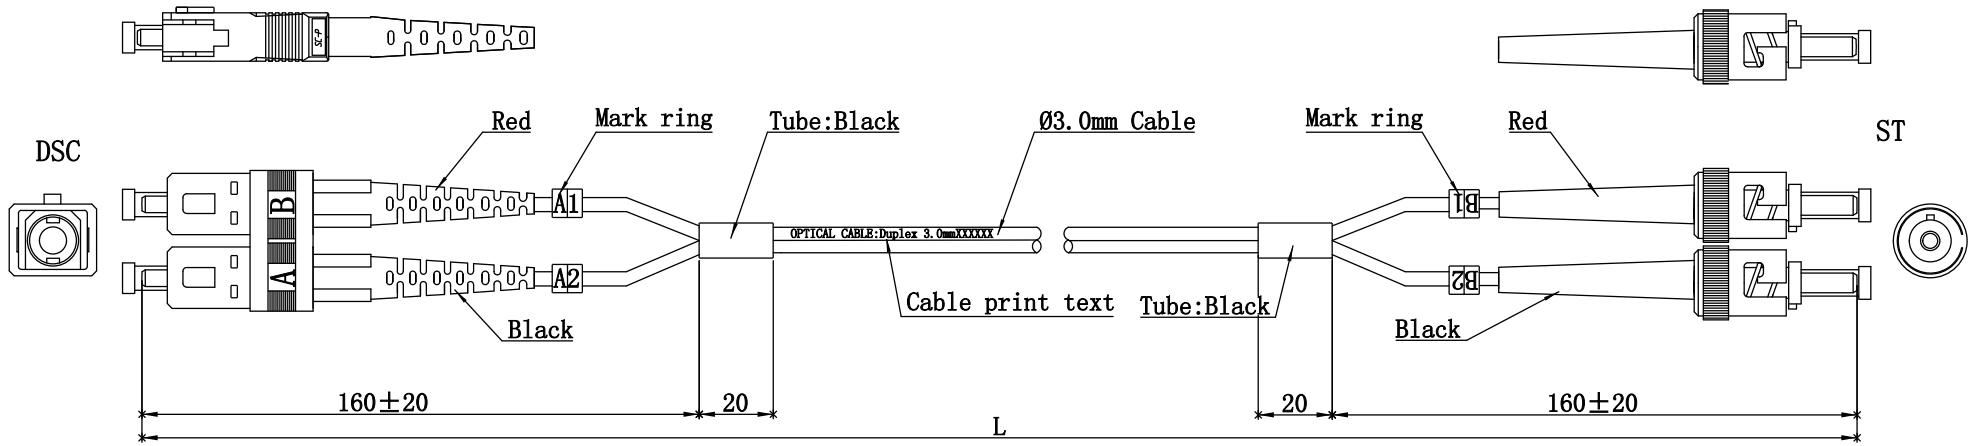

Specifications:

Type	DSC/UPC-ST/UPC
Fiber Mode	OM2
Core Diameter (um)	50/125
Operating Wavelength (nm)	850/1300
Cable Color	Orange
Cable Diameter (mm)	Ø3.0
Operating Temperature (° C)	-40~+75
Storage Temperature (° C)	-40~+85
Insertion loss (dB)	≤0.2dB
Return loss (dB)	≥35dB
SC Connector Color (Boot)	Red/Blcak
ST Connector Color (Boot)	Red/Blcak

L ≤ 5m, TOLERANCES: 0 ≤ ΔL ≤ 5cm
 L > 5m, TOLERANCES: 0 ≤ ΔL ≤ 1%*L

Remarks:

Length	Item #
1M	102752
2M	102753
3M	102754
5M	102755
7M	102817
10M	102818
15M	102946



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:
 .x +1
 +0.2
 .xx +0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: SC-ST-DX OM2 Patchcord	
CHECKED BY	SHEET 1of1	ITEM NO.	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm