


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD


| REVISION INFORMATION | | | |
|----------------------|-----------|-------------|-------------------|
| Rev. | Rev. Date | Modified By | Brief Description |
| | | | |

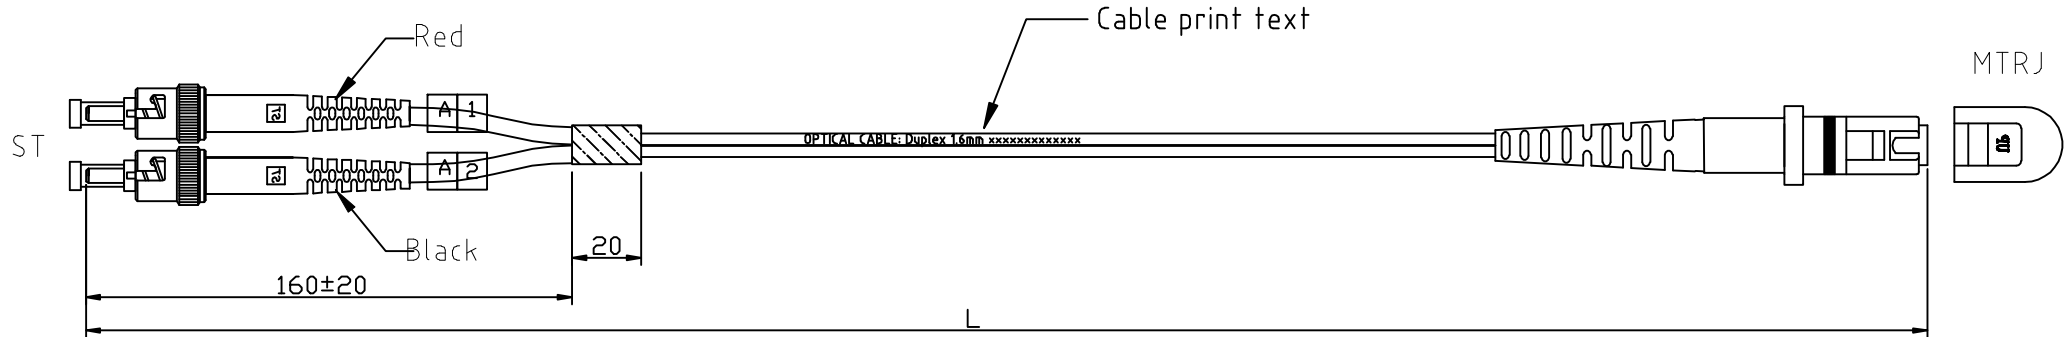

$L \leq 5m$, TOLERANCES: $0 \leq \Delta L \leq 5cm$
 $L > 5m$, TOLERANCES: $0 \leq \Delta L \leq \%1 * L$

Specifications:

| Fiber Mode | PC | APC | OM3 | MM | Item |
|---------------------------|------------|-----------|-----------|-----------|--------|
| Type | ST-MTRJ-DX | | | | 102873 |
| Cable Diameter(mm) | φ1.6 | | | | 102874 |
| LC Boot Color | red/black | red/black | red/black | red/black | 102875 |
| MTRJ Boot Color | black | black | black | black | |
| Cable Color | yellow | yellow | aqua | Orange | |
| Core Diameter(um) | 9/125 | | 50/125 | 62.5/125 | |
| Cable Type | G657A | | OM3 | OM1/OM2 | |
| MTRJ Insertion Loss(dB) | ≤ 0.75 | | ≤ 0.50 | | |
| LC Insertion Loss(dB) | ≤ 0.3 | | | | |
| MTRJ Return Loss(dB) | ≥ 40 | | ≥ 30 | | |
| LC Return Loss(dB) | ≥ 50 | ≥ 60 | ≥ 35 | ≥ 35 | |
| Operating Temperature(°C) | -40~+75 | | | | |
| Storage Temperature(°C) | -40~+85 | | | | |
| Operating Wavelength(nm) | 1310/1550 | | 850/1300 | | |

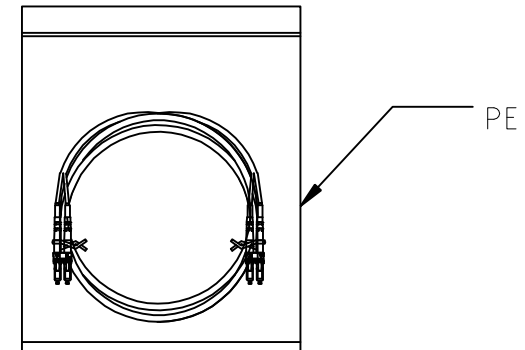

IN Packing


BestLinkNetware

| | | | |
|------------------------|----------------------------|---|-----------------|
| DRAWN BY :xlong | DATE: 2012/02/07 | DESCRIPTION: ST-MTRJ-DX Patchcord | |
| CHECKED BY | SHEET 1 of 1 | ITEM NO. 10287X | |
| APPROVED BY | SCALE 1:1 | REV. 00 | UNIT: mm |

| NO. | PART NAME | SPECIFICATION DESCRIPTION | QTY | UNIT |
|-----|-----------|---------------------------|-----|------|
| ③ | | | | |
| ② | | | | |
| ① | | | | |