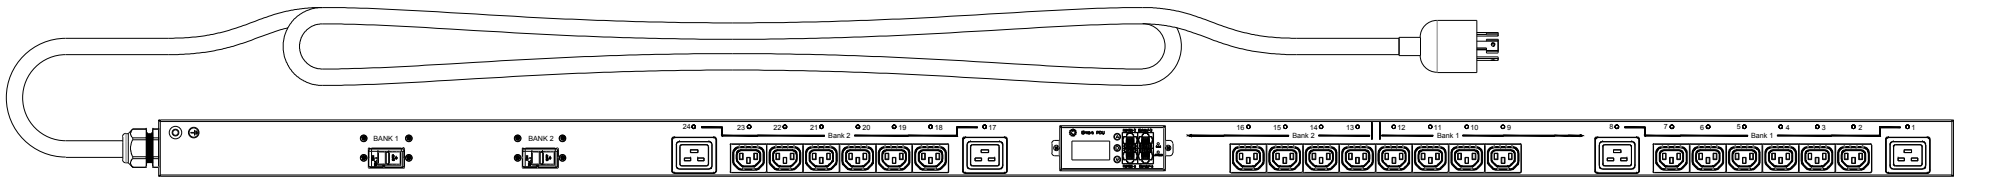

FRONT VIEW



SIDE VIEW

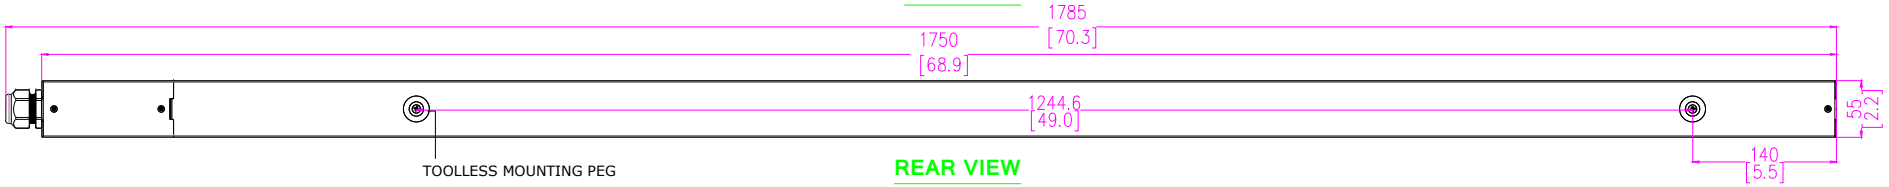

REAR VIEW

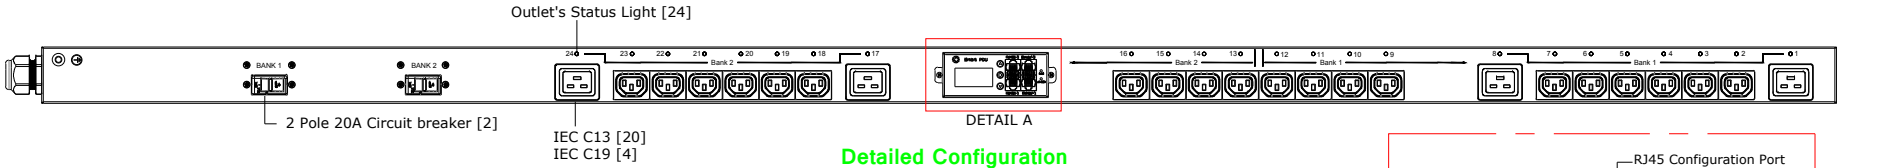

Detailed Configuration

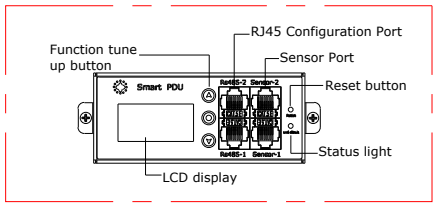

DETAIL A 2 : 1

INPUT CONNECTION:



NEMA
L6-30P

Config Table		
Model#	Power Cord Length	Input Connection
AP3002-2004	3x10AWG,3.6M(12ft)	NEMA L6-30P

PDU Series : Metered BANK & Switched per outlet
Input : 200-240V AC ,24A ,1Ph, 50/60Hz.
Outlet : IEC C13 [20] IEC C19 [4]
CB : 20A-2P [2]
Bank : 2
Case Material: Galvanized steel sheet
Case: Black

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF A-RACK AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM A-RACK. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.	Drawn by: Darren Approved by: Roger	Description: Metered BANK&Switched per outlet PDU 208V,24A,1Ph,50/60 Hz	Drawing No. AP3002-2004
BESTLINK NETWARE	Version: A1	Third Angle Projection	Unit: mm
	Scale: 1:1	A4	Sheet:1 OF 1

Tolerance/Tolerance ISO 2768-M
>0.5=3 ±0.1
>3=6 ±0.1
>6=30 ±0.2
>30=120 ±0.3
>120=400 ±0.5
>400=1000 ±0.8