

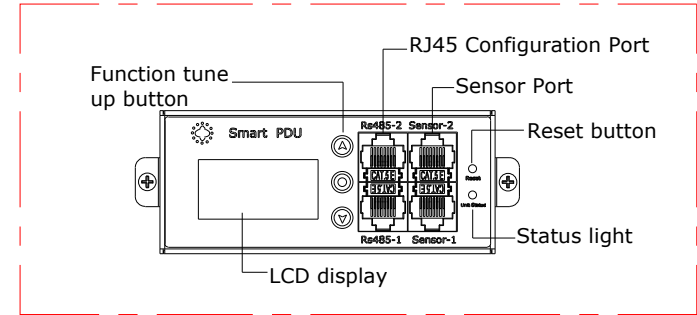
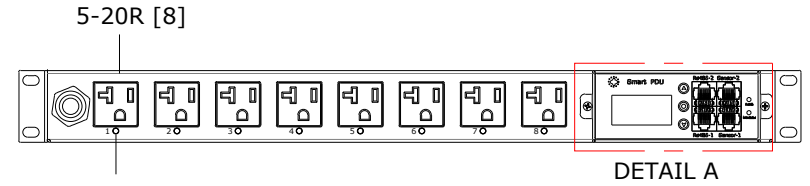
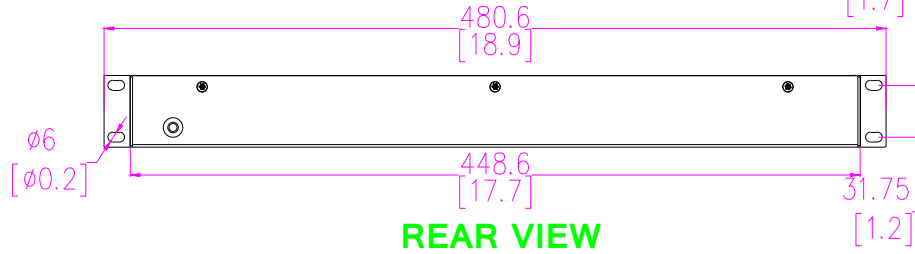
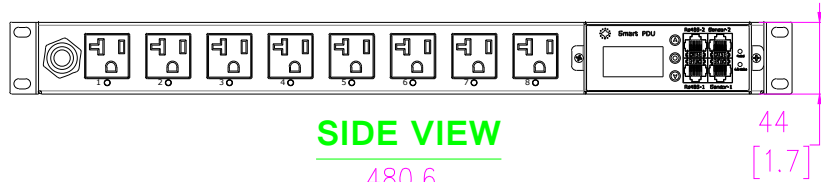


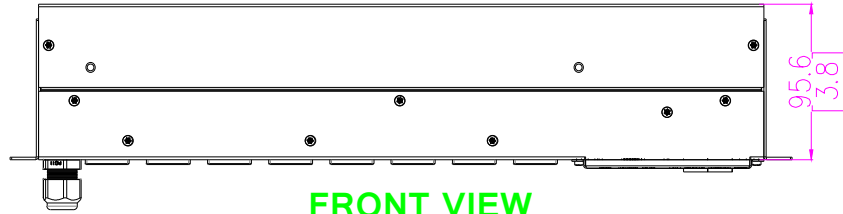

INPUT CONNECTION:



NEMA 5-15P

Config Table		
Model#	Power Cord Length	Input Connection
AP3102-0800	3x14AWG,3.6M(12ft)	NEMA L6-30P

PDU Series : Metered BANK & Switched per outlet
 Input : 100-120V AC ,15/20A ,1Ph, 50/60Hz.
 Outlet : 5-20R [8]
 CB : N/A
 Bank : 1
 Case Material: Galvanized steel sheet
 Case: Black

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF A-RACK AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM A-RACK. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Drawn by: Darren
 Approved by: Roger

Description:
 Metered BANK&Switched per outlet PDU
 100-120V,15/20A,1Ph,50/60 Hz

Drawing No.
 AP3102-0800

BESTLINK
 NETWORKARE

Version: A1	Third Angle Projection	Unit: mm
Scale: 1:1	A4	Sheet:1 OF 1