


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
1.0	2016/04/11	Pillar	Add labels on packaging
2.0	2019/04/12	Panther	Revise warning label
3.0	2022/06/22	Hypo	Revise Conduction

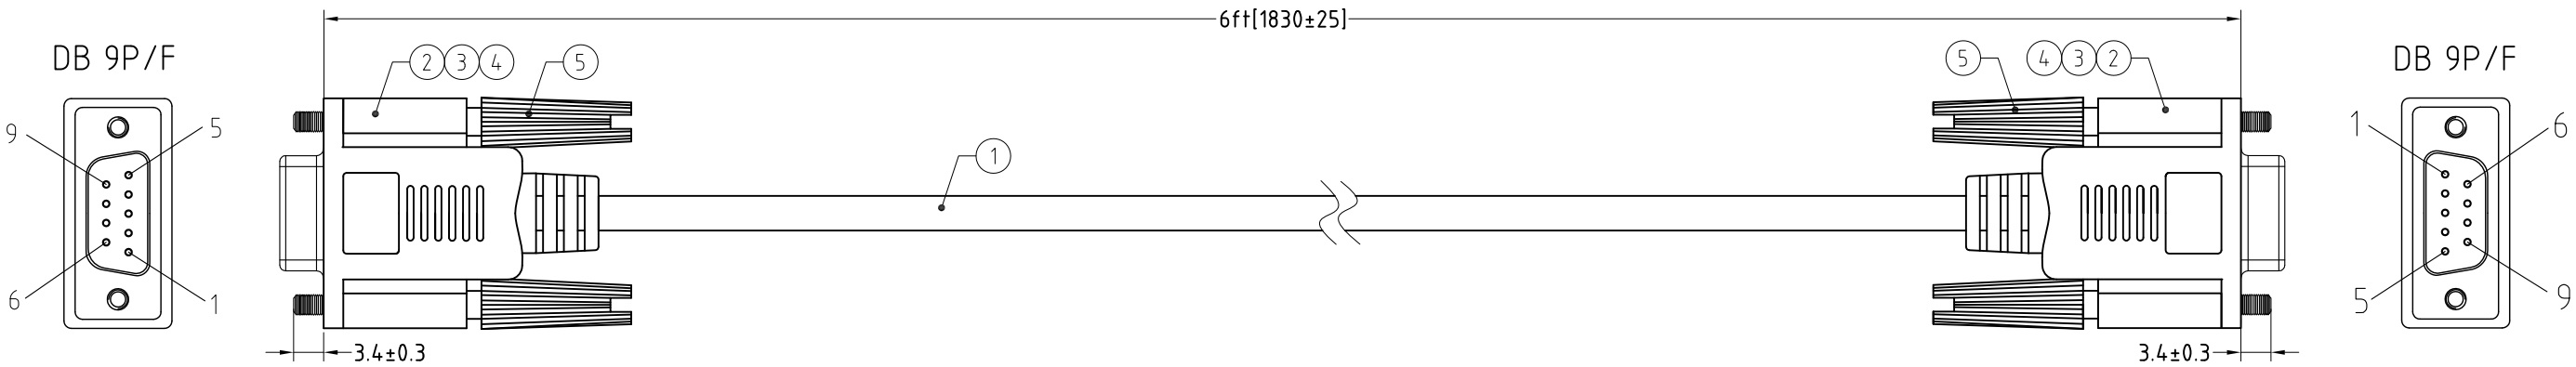


Electrical character:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC 300V AT 10ms.
- 3)Insulation resistance:5M Ohm(min)
- 4)Conductive resistance:7 Ohm(max)



Wire Details

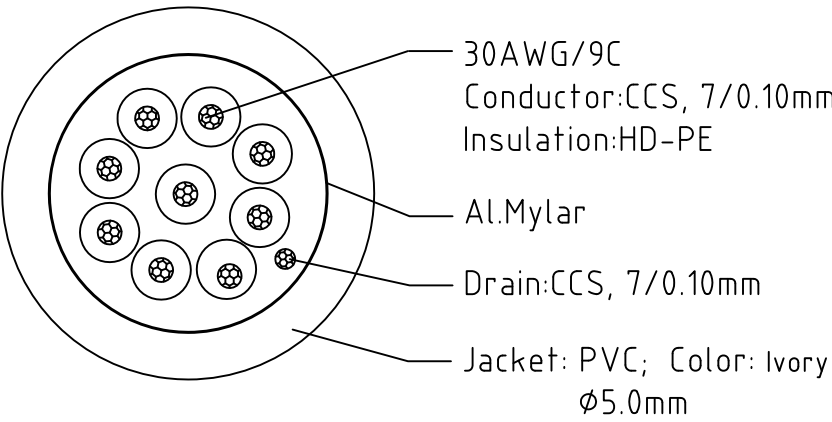

PIN ASSIGNMENT:

DB 9P/F		DB 9P/F
1	Black	1
2	Purple	2
3	Green	3
4	Blue	4
5	Yellow	5
6	Brown	6
7	Red	7
8	Orange	8
9	Gray	9
SHELL		SHELL



①	Cable	30#(7/0.10CCS)*9C+D+A+PVC,Ivory,OD5.0mm		
②	Conn	DB 9P/F,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type		
③	Innrmold	PE,Low density		
④	Overmold	PVC,45Pa,Ivory		
⑤	Thumbscrew	#4-40UNC,Ø4.0*L37.4mm,Nickel Plated,Molding PVC(Ivory)		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT

Unless specified on the drawing, tolerances are per the follows:

.	+1
.X	+0.2
.XX	+0.05


DRAWN BY	DATE: 2022/06/22	DESCRIPTION: DB 9P F TO F Serial Cable	
CHECKED BY	SHEET 1of2	ITEM NO. 180231	
APPROVED BY	SCALE None	REV. 3.0	UNIT:mm

NOTE: CARTON MATERIAL MUST BE A=A

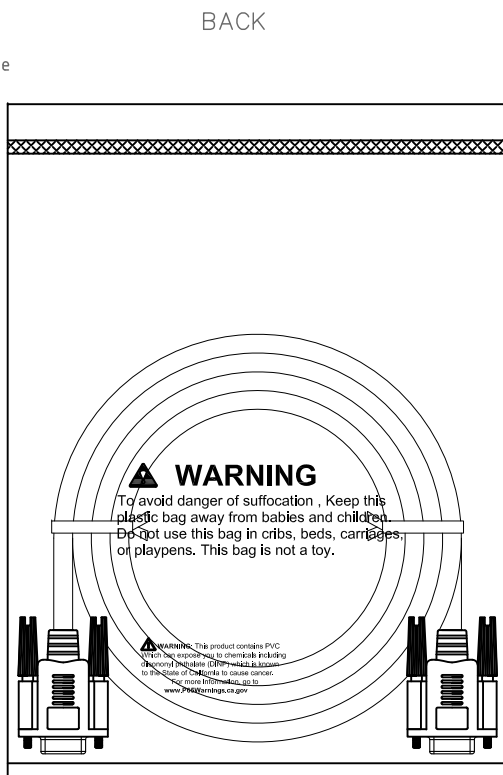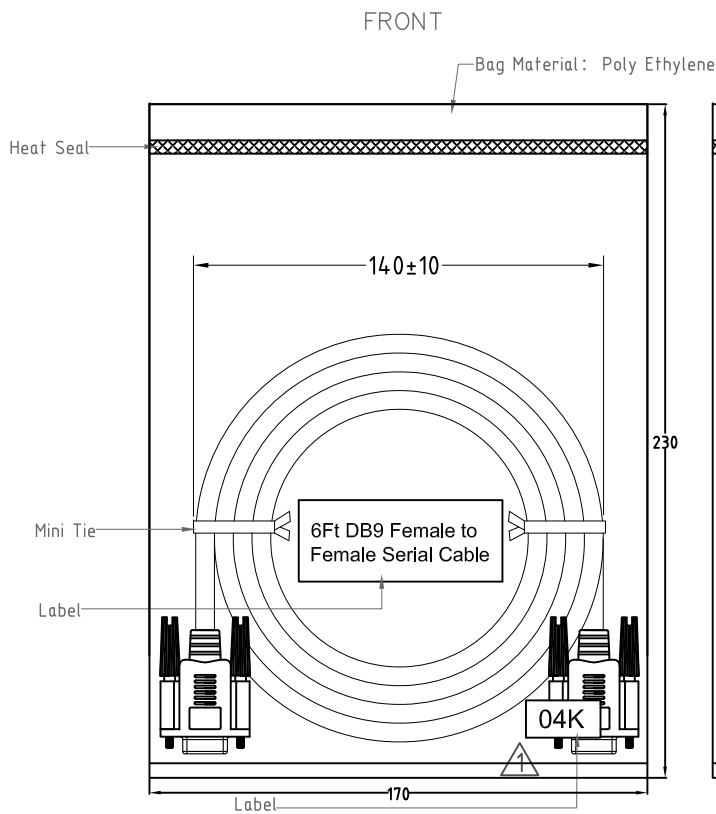


10pcs

&.10pcs cable in a clear big bag

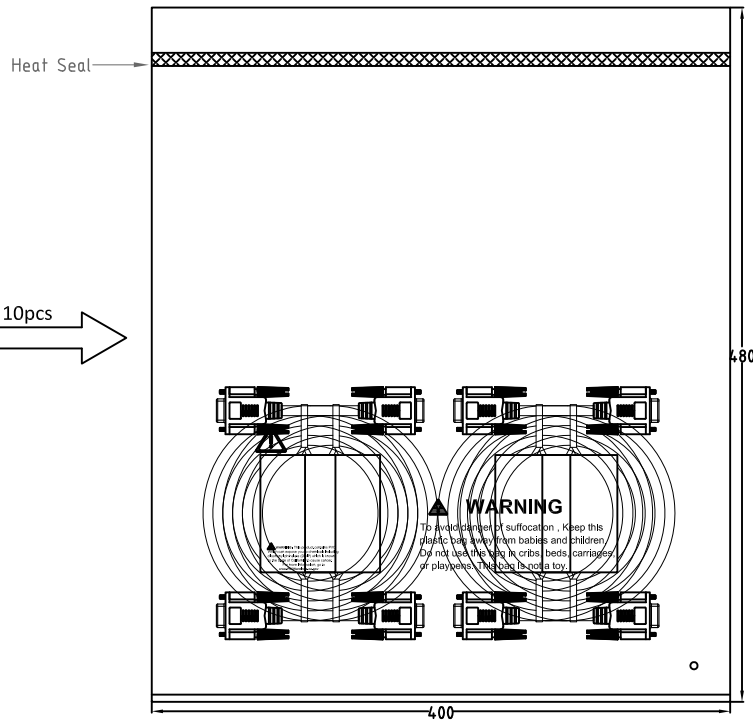

150pcs

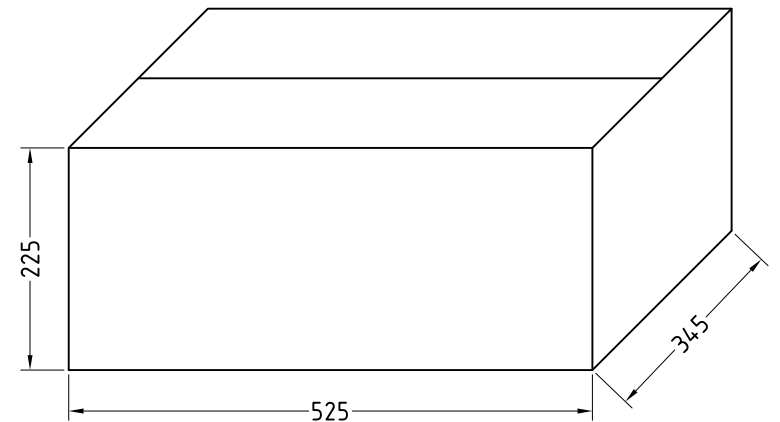

REVISION INFORMATION


Rev.	Rev. Date	Modified By	Brief Description
1.0	2016/04/11	Pillar	Add labels on packaging
2.0	2019/04/12	Panther	Revise warning label
3.0	2022/06/22	Hypo	Revise Conduction

MAIN MARK


P/O: XXXXXX
P/N: 180231
Q'TY: 150
C/NO.: Cxxx

MADE IN CHINA

Label:
Size:50 x 20 mm

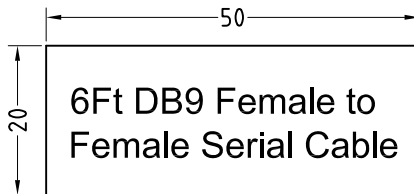

Label:
Size:10 x 5 mm



SIDE MARK



P/N: 180231
Q'TY: 150 PCS
N.W.: 15.49 KGS
G.W.: 16.49 KGS
Date Code: XX-XXXX
Vender Code: PS00999

Carton Size: 20.67"(L)*13.58"(W)*8.86"(H)
Carton Quantity: 150 pcs
Carton Weight: 36.44 LBS

Packing Instruction:

1. First of all, coil the cable (see attached). Secure the cable with cable tie, and then pack each cable with an individual PE bag. 10pcs cable in a clear big bag, The label is attached to the PE bag.
2. Seal the PE bag with heat sealing machine.
3. Use a waterproof bag to pack the products before going into master carton. Make sure each individual cable is staggered and positioned tidily. A paperboard is needed in both the bottom and the top of the products.
4. See shipping mark on the left.



DRAWN BY	DATE: 2022/06/22	DESCRIPTION: DB 9P F TO F Serial Cable
CHECKED BY	SHEET 2of2	ITEM NO. 180231
APPROVED BY	SCALE None	REV. 3.0
	UNIT:mm	