


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
	2014.08.05		

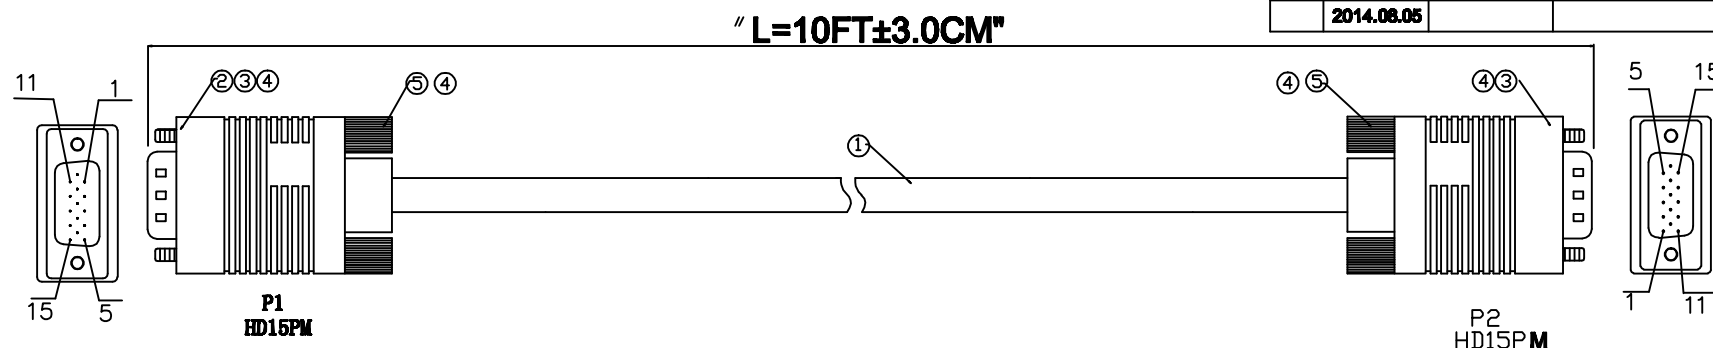

Technical Requirements

1.Electrical Characteristics:

1.1.cable must pass electrical testing, no short circuit, open circuit, indirect sexual contact, insufficient insulation, dislocation, and other electrical contact resistance of adverse circumstances

1.2 Electrical Test Conditions

Conductor Resistance: <10Ω

Insulation resistance: >10MΩ/300V

2.Appearance requirements:

2.1 No shot short.shrink. flow liner

2.2 Wire surface printing clear, smooth appearance, can not have scratches and obvious color

2.3 15PIN connector no empty pin and blunt glue

2.4 Terminals can not have oxidation or electrodeposited coating fall off

3.Size request

3.1 cable length match the drawing

3.2"▲" qc test according to this size



4. cable wire connect point

view the point

5.Packing:

Circle around a single package.

Wire

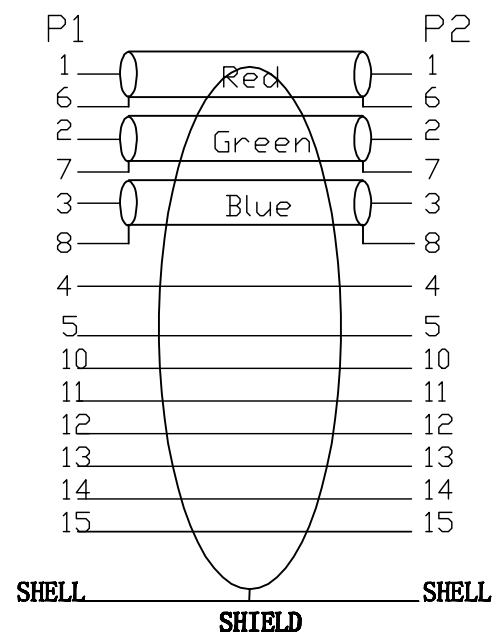

Packing

1).Material List :

⑤	SCREW	Screw2.5*45MM	4	PCS
④	Outer Moulding	PVC 45P Black	NA	KG
③	PE	PE Internal Mold Material	NA	KG
②	Connector	HD15PM Blue Bobbin Nickel-Plated	2	PCS
①	Wire	(7/0.12TC*PHE*30/0.13CCA*2.5PVC)*8Coax*7/0.12TC*8C*AL+D 7/0.125C*1288 AL-BG 000.5	10	FT
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DRAWN BY	DATE: 2014/08/05	DESCRIPTION: 10Ft SVGA Male to Male Cable	
CHECKED BY	SHEET 1 of 1	ITEM NO. 180442	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm