



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD.

| REVISION INFORMATION |           |             |                   |
|----------------------|-----------|-------------|-------------------|
| Rev.                 | Rev. Date | Modified By | Brief Description |
|                      |           |             |                   |

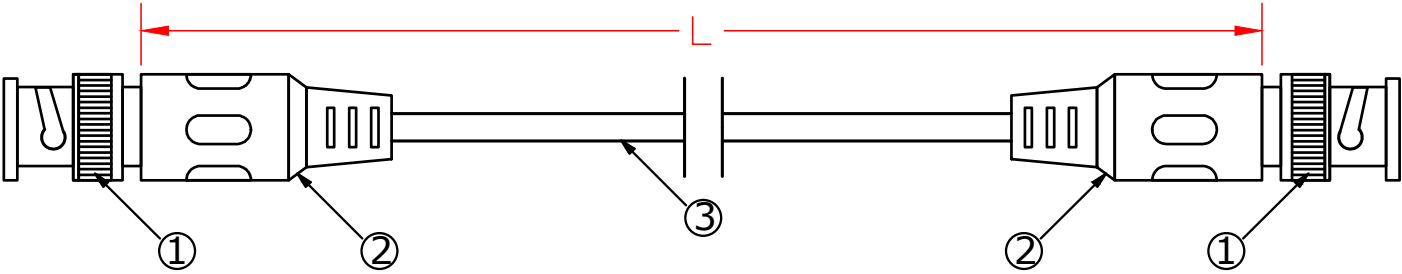

| LINK NO. | PART NO. | LENGTH(L)       |
|----------|----------|-----------------|
| 202356   |          | 3Ft 915±30      |
| 202350   |          | 6Ft 1830±50     |
| 202351   |          | 12Ft 3660±80    |
| 202352   |          | 25Ft 7620±80    |
| 202353   |          | 50Ft 15240±100  |
| 202355   |          | 75Ft 22860±150  |
| 202354   |          | 100Ft 30480±150 |

ELECTRICAL TESTING  
1. CONDUCTOR RESISTANCE: ≤5Ω 300V DC



|     |           |                                                              |      |      |
|-----|-----------|--------------------------------------------------------------|------|------|
| ③   | Cable     | Cable RG59U with 32/0.10 shielding OD.: 6.0 Black PVC Jacket | 1    | PC   |
| ②   | PVC       | PVC Black                                                    | 2    | PCS  |
| ①   | BNC Male  | BNC Male-Nickel Plated                                       | 2    | PCS  |
| NO. | PART NAME | SPECIFICATION DESCRIPTION                                    | Q'TY | UNIT |

|             |                     |                                                    |
|-------------|---------------------|----------------------------------------------------|
| DRAWN BY    | DATE:<br>2013/06/05 | DESCRIPTION:<br>RG59 Cable with BNC Male Connector |
| CHECKED BY  | SHEET 1 of 1        | ITEM NO. 202356                                    |
| APPROVED BY | SCALE 1:1           | REV. 00    UNIT: mm                                |