



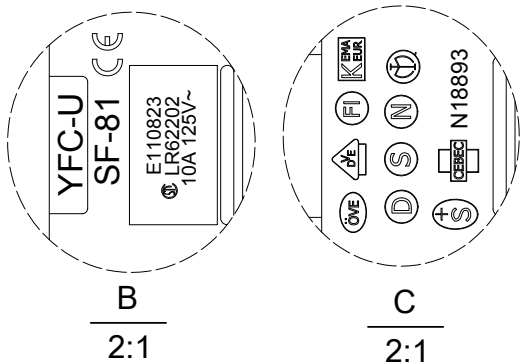

c(UL) SJT 3X0.824mm²(18AWG) 105°C 300V FT2



A-A Section

Specifications Comparison Table					
PID	Cable Color	Molding Color	SF-81 Housing color	SF-82S Housing color	Length (FT)
	Black	Black	Black	White	1±0.08
	Black	Black	Black	White	2±0.1
	White	White	White	White	2±0.1
	White	White	White	White	3±0.15
	White	White	White	White	6±0.15

Pinout		
IEC60320 C14 SF-81	Wire	IEC60320 C13 SF-82S
E	GREEN	E
N	WHITE	N
L	BLACK	L

Polarity and Continuity Test	
Dielectric Voltage Withstand Test :1500V /1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor resistance	≤ 22.4Ω/1000m
Voltage Rating	AC 300V

⑤	UL label	General Use Cord set	1	PC
④	Molding	PVC 40P	AR	G
③	Terminal	C13 Terminal Brass Natural color and Bracket, With 18-14AWG	1	PC
②	Terminal	C14 Terminal Brass Natural color and Bracket, With 18-14AWG	1	PC
①	Cable	SVT 18AWGx3C 105℃	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT



VENDOR CODE :	DESCRIPTION : Cord - IEC-320-C14 to IEC-320-C13 18AWG, 10A, 3-Prong, SJT,			
APPROVED BY PM & DATE :				
PM PRINT NAME :				
	DATE : 2021.08.18	UNIT : MM	SHEET: 1 OF 4	FILE NAME: PID_PRODUCT