


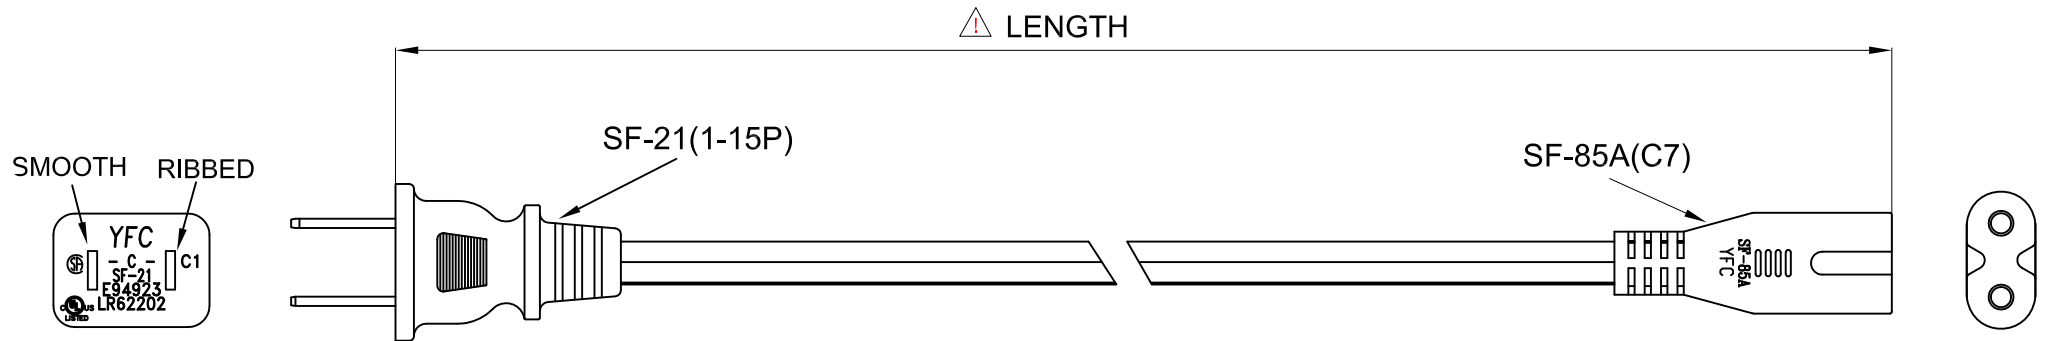


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2017/03/09	Susam Tang	NEW

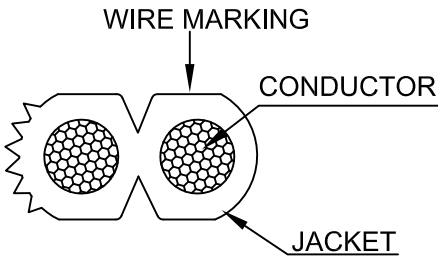

item NO.	length(mm/FT)	tolerance(mm)
210301	1830 MM/6FT	±20
210308	3050MM/10FT	±30
210307	2438MM/8FT	±30
210313	914MM/3FT	+15/-10



conductor resistance: 23.256 ohms/km at 25°C

REMARKS:

- 1.PLUG(SF-21) RATED POWER:125V 10A
- 2.CONNECTOR(SF-85A) RATED POWER:125V 10A
- 3.WIRE: SPT-2 2X18AWG 60°C RATED VOLTAGE:300V
- 4.DVW TEST:1500V,1S
- 5.POLARIZATION AND CONTINUITY TEST
- 6.COLOR: BLACK(BALANCE LINE DEDICATED)
- 7.COMPLY WITH UL817 IEC60320 STANDARD

WIRE MARKING (Hollow) NO.6	(UL) E135710-F3 SPT-2 2X18AWG 60°C 300V VW-1 CSA LL95737 SPT-2 2X0.824mm ² (18AWG) 60°C 300V FT2 YFC-BONEAGLE
----------------------------------	---



NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT
③				
②				
①				

Unless specified on the drawing, tolerances are per the follows:
 .x +1
 .x +0.2
 .xx +0.05

DRAWN BY Susam	DATE: 2017/03/09	DESCRIPTION: SF-21+SF-85A SPT-2 2X18AWG 60°C
CHECKED BY Qin Rao 研發處	SHEET 2 of 1	ITEM NO.
APPROVED BY 2017.03.14 覃鏡	SCALE 1:1	REV. 00 UNIT:mm