


ID=9.5MM
L=4CM

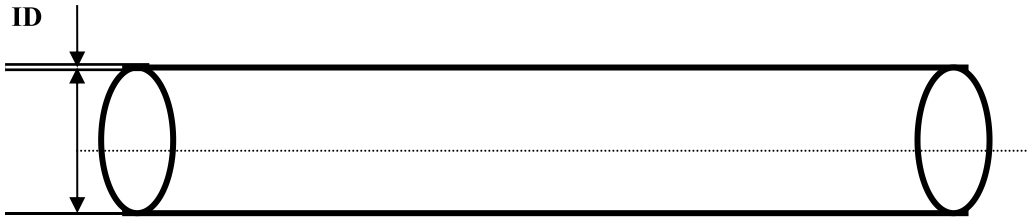

VERSION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

Performance Features		
Performance	Testing method	Performance Indicators
Tensile Strength(MPa)	ASTM D 2671	≥12
Elongation at break(%)	ASTM D 2671	≥300
Tensile strength after thermal aging(MPa)	UL224 158°C×168h	≥7.3
Elongation at break after thermal aging(%)	UL224 158°C×168h	≥200
Breakdown strength(KV/mm)	IEC 243	≥15
Volume resistivity(Ω.m)	IEC 93	≥1×10 ¹⁴
Material:1.Cross-linked polyolefin(EVA); 2.Hot melt adhesive		

Hot Melt Adhesive Properties		
Performance	Testing method	Performance Indicators
Water absorption rate	ASTM-D570	< 0.2%
Softening Point	ASTM-E8	95°C
Peel Strength(PE)	ASTM-D1000	120N/25m
Peel Strength(AL)	ASTM-D1000	80N/25m



DRAWN BY FW	DATE: 2026/01/26	DESCRIPTION: Heat Shrink Tube for Cat6A 24 AWG Armored Cable Termination 200pcs
CHECKED BY ACE	SHEET 1 of 2	ITEM NO. 220406
APPROVED BY	SCALE 1:1	REC. 00 UNIT: mm