



BL-810L

In-Wall Speaker

Key features:

- ▶ 2-Way system with soft dome tweeter design.
- ▶ High quality crossover components for superior sonic reproduction.
- ▶ Easy Rotary Lock Clamp mounting system.
- ▶ High power, excellent sound for home, theater installation.
- ▶ White aluminum mesh grille.

Application:

This in-wall speaker delivers superior sound and clear intelligibility in a variety of ceiling environments.

It can be easily installed in hard-surfaced ceilings, suspended ceilings and new constructions via a front-mounted easy rotary lock clamp. The low-distortion speaker design, coupled with a computer-matched venting system, delivers high intelligibility and exceptional low-frequency response for both music and speech reinforcement.




Specifications:

Rated Impedance:	8 Ω \pm 15% at - 350 Hz
Rated Power:	50 W
Max.Power:	100 W
Sensitivity(1W/1M):	84 dB \pm 3 dB, 1 W/M at 400,500,600,700 Hz-Avg
Frequency Range :	30 Hz-20 KHz -10 dB / \pm 20% Hz
Resonance Frequency:	37 Hz \pm 20%
Whistling:	9 Volts
D.C Resistance (Rdc):	6.2 Ω \pm 10%
Magnet:	Ferrite
Membrane:	PP cone and rubber surround
Termination:	Push Terminal
Baffle:	ABS / White
Mesh Grille:	Alu
Dimension:	358(L) * 255.5(W) * 97.3(D)mm
Weight:	2.42 KGS

BL-810L

Frequency Response BL-810L

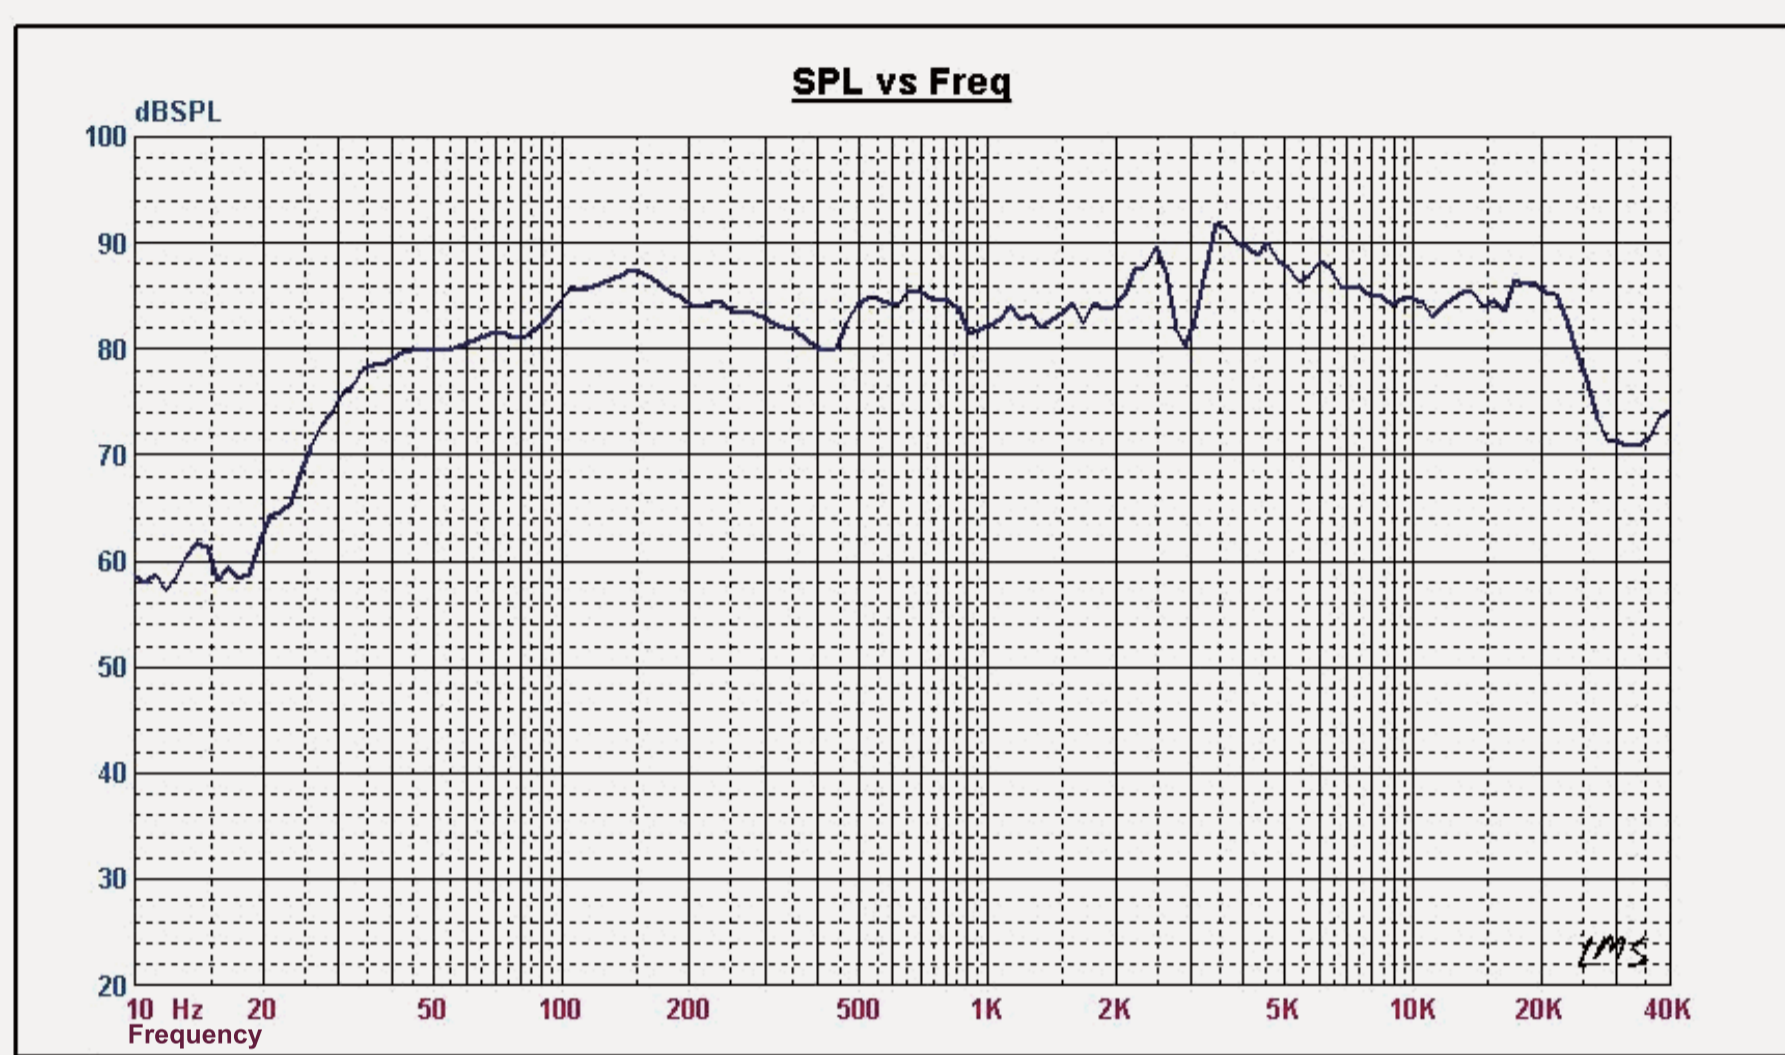

Dimensional Drawings BL-810L (dimensions in millimeters)

