

# BL-6636TA


## In-Wall Speaker

### Key features:

- ▶ Metal cabinet with metal mesh grille.
- ▶ Easy wall mounting.
- ▶ High-quality full range speaker.
- ▶ It can be installed on any flat surface.
- ▶ With ceramic terminal and thermal fuse, to avoid total break down of a speaker line.
- ▶ Good music and clear speech reproduction.

### Application:

This in-wall speaker delivers superior sound and clear intelligibility in a variety of ceiling environments. It can be easily installed in hard-surfaced ceilings, suspended ceilings and new constructions via a front-mounted easy rotary lock clamp. The low-distortion speaker design, coupled with a computer-matched venting system, delivers high intelligibility and exceptional low-frequency response for both music and speech reinforcement.

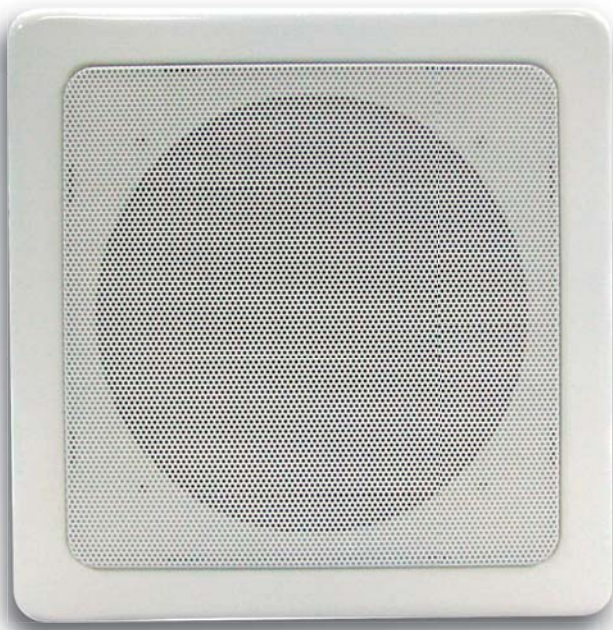


### Specifications:

|                     |                                                                                                            |
|---------------------|------------------------------------------------------------------------------------------------------------|
| Rated Impedance:    | 8 $\Omega$                                                                                                 |
| Rated Impedance:    | 490 $\Omega$ (10 W), 980 $\Omega$ (5 W),<br>(Transformer) 1960 $\Omega$ (2.5 W), 3920 $\Omega$<br>(1.25 W) |
| Rated Power:        | 10 W                                                                                                       |
| Max.Power:          | 20 W                                                                                                       |
| Sensitivity(1W/1M): | 90 dB $\pm$ 3 dB, 1 W/M at<br>400,500,600,700 Hz-Avg                                                       |
| Frequency Range :   | 85 Hz-20 KHz -10 dB<br>/ $\pm$ 20% Hz                                                                      |
| Whistling:          | 50 Volts                                                                                                   |
| Rated Voltage:      | 70 Volts                                                                                                   |
| Power Taps:         | 10-5-2.5-1.25 W                                                                                            |
| Termination:        | Connector                                                                                                  |
| Cabinet:            | STEE / White                                                                                               |
| Baffle:             | STEE / White                                                                                               |
| Mesh Grille:        | STEE / White                                                                                               |
| Dimension:          | 201(L) * 201(W) * 77(D) mm                                                                                 |
| Weight:             | 1.59 KGS                                                                                                   |

# BL-6636TA

## Frequency Response BL-6636TA

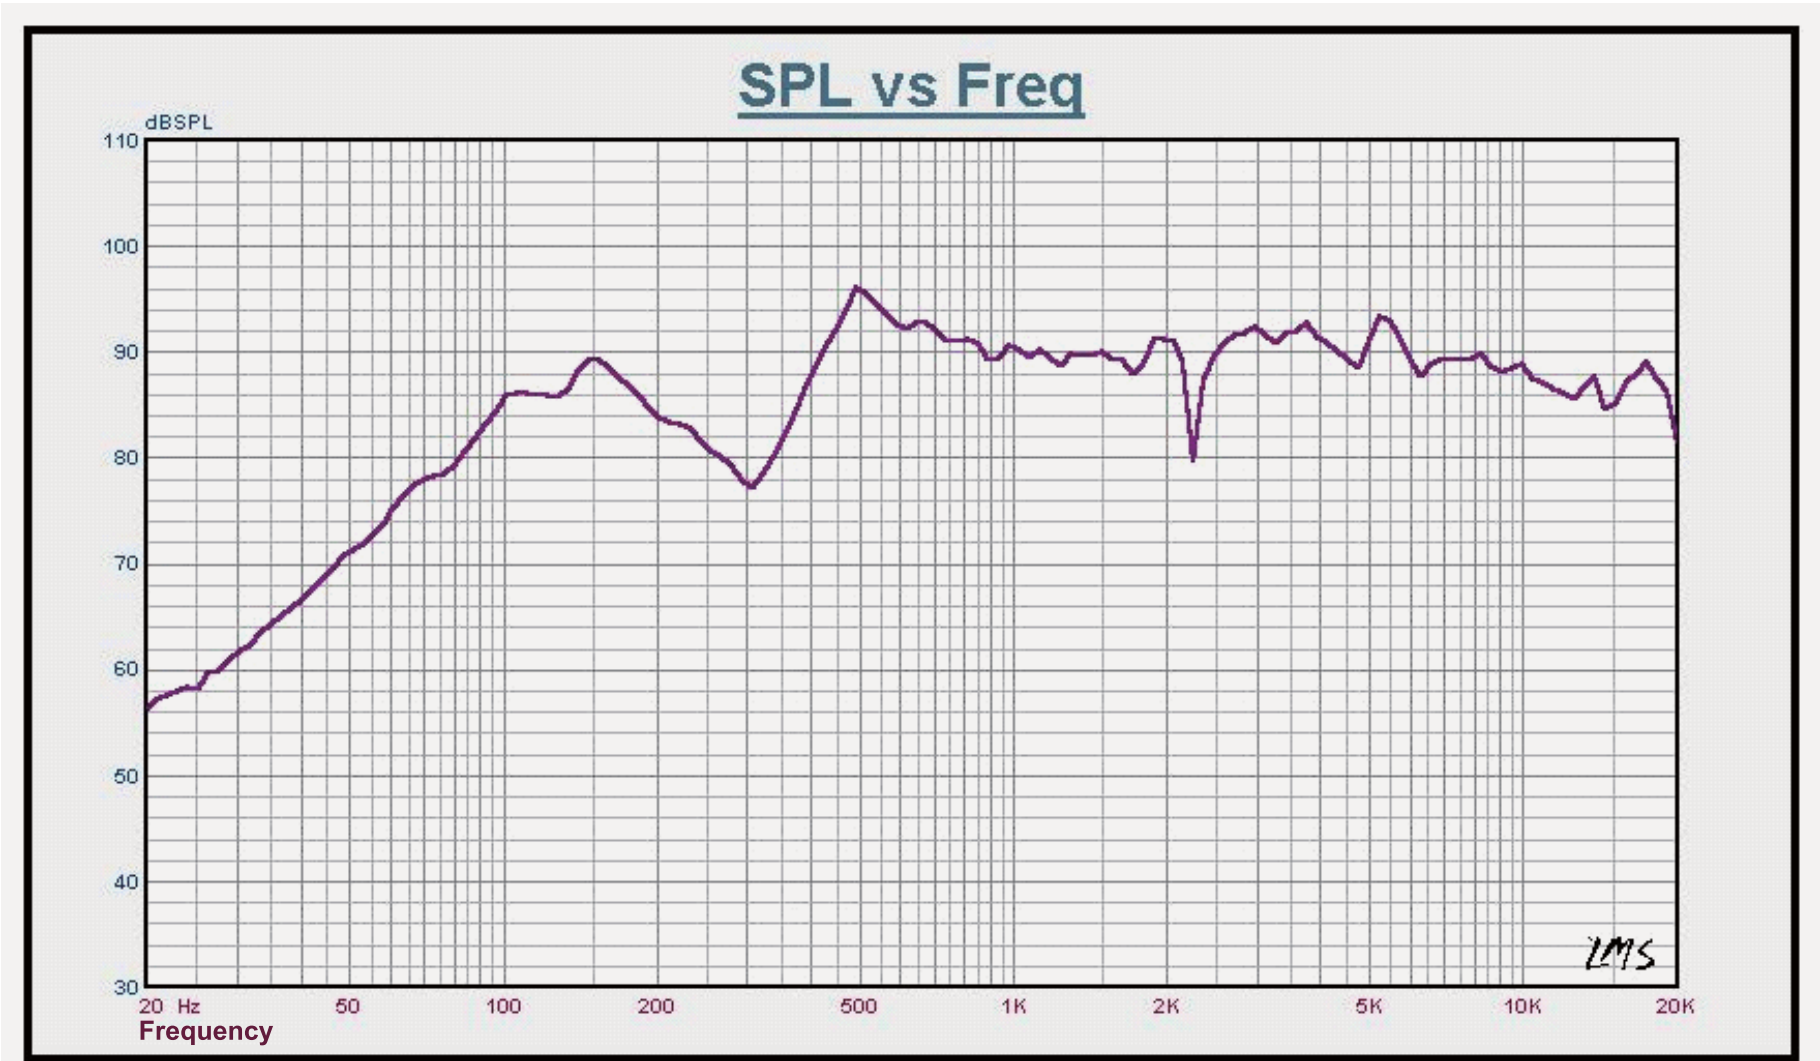

## Dimensional Drawings BL-6636TA (dimensions in millimeters)

