



Rev.	Rev. Date	Modified By	Brief Description
A/0	2015/11/19	Maxwell	NEW

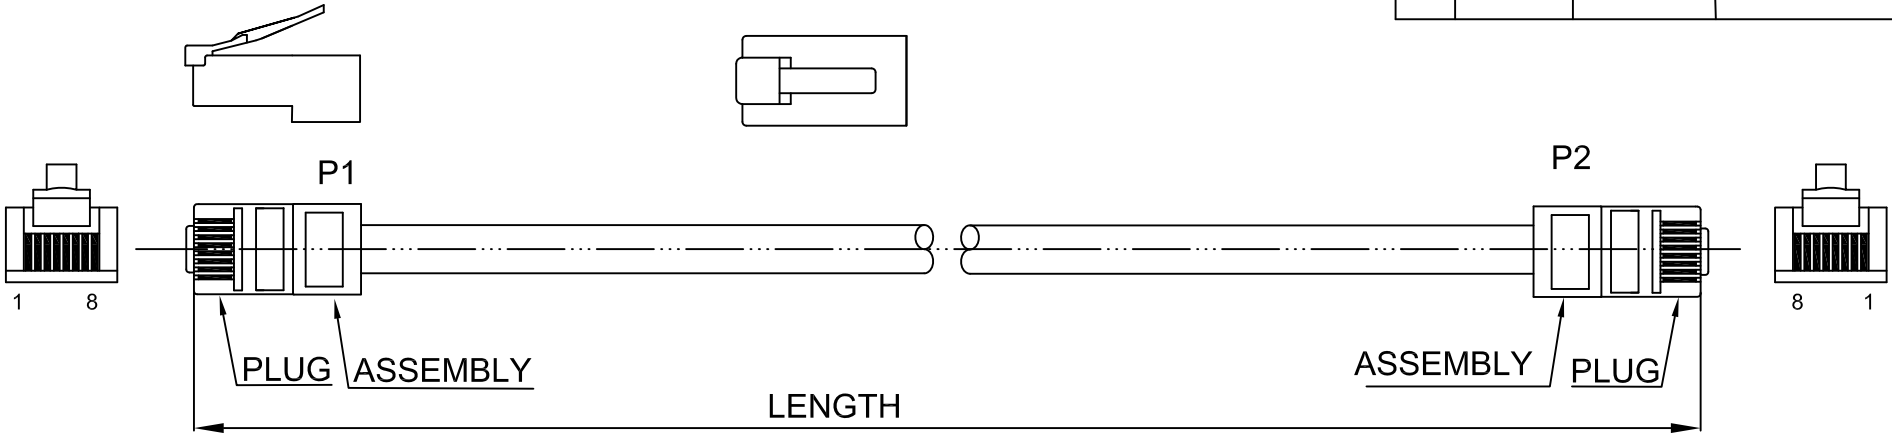

Marking :YFC UTP CAT.5E 350MHZ PATCH ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 3P
<FP1411> CONFORMS TO GIGABIT ETHERNET ▲ 24AWGX4P TYPE CMR(UL) C(UL) E164469-F3

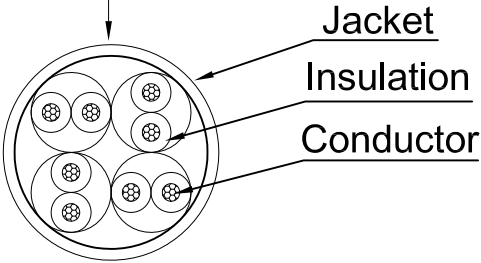

Conductor		Bare Copper 24AWG
Insulation		Thickness:MIN at any point:0.17mm MAX AVG:0.18mm Diameter:0.94±0.06mm
Jacket	PVC	Thickness:MIN at any point:0.60mm MAX AVG:0.65mm Diameter:5.6±0.2mm
Wire	CAT.5E UTP STR 24AWG*4P	
Plug	ASSEMBLY 8P8C 50U"	
Length	XXFT	
Color	GY825	

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PINOUT			
PA/R	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

			
DRAWN BY Maxwell	DATE: 2015/11/19	DESCRIPTION: CAT.5E UTP 24AWG*4P PVC	
CHECKED BY QinRao	SHEET 1of1	ITEM NO. 100450GY ~ 100473GY	
APPROVED BY 	SCALE 1:1	REV. 00	UNIT:mm 