



MOLDING

DATE	REV.	REVISION	DRAFTING	CHECKED
2019. 05. 16	A/0	NEW	FQ	ZCY

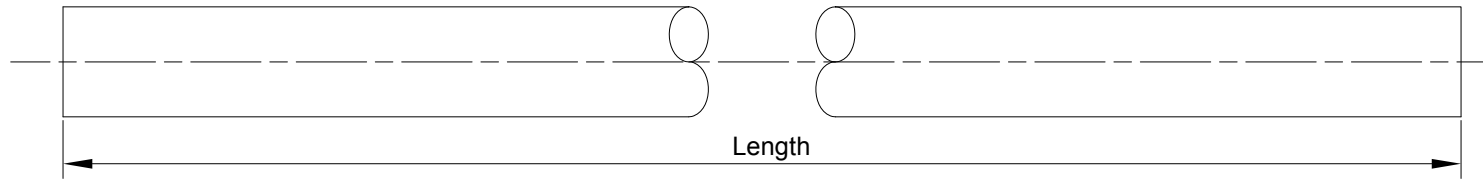

Marking: CAT.5E UTP (OUTDOOR USE) 24AWGX4P INSTALLATION CONFORM TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-3-1 XXXXFT

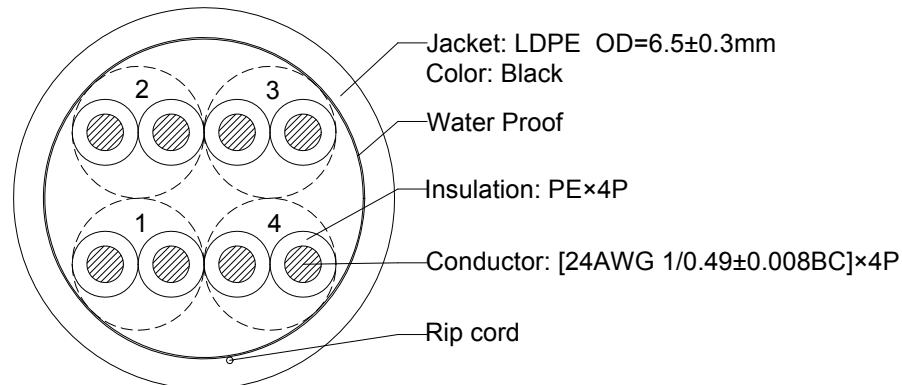

CROSS-SECTION OF CABLE

orange	2	green	3
white/orange		white/green	
blue	1	brown	4
white/blue		white/brown	

Parameter(20°C)

Item	Specified Value
Conductor resistance	≤95.8Ω/1000m
Rated Temperature	-20~75°C

Packing

Part No.	Color	Length (ft)	Wood axion	
			Size(cm)	
100959BK	Black	1000	D35xH25	

Unless specified on the drawing, tolerances are per the follows:

X.	±0.20	X°	±3
.X	±0.10	.X°	±0.3
.XX	±0.05		



DRAW. NO		TITLE	LAN CABLE Cat.5e U/UTP W/O Cross 24AWG×4P Solid Water-Blocking LDPE(outdoor) , 1000ft		
CUSTOMER					
CUST' R P/N	100959BK	DRAW	FQ	DATE	2019. 05. 16
SCALE		CHECK	ZCY	DATE	2019. 05. 16
UNIT	mm	APPROVED		SHEET	

Material	Part Number	Note	<input checked="" type="checkbox"/> RoHS	<input type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other
----------	-------------	------	--	--------------------------------	-----------------------------	-----------------------------	--------------------------------