
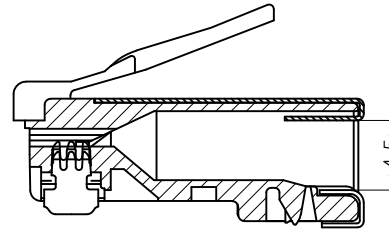


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD




11*1451****

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
01	2021.06.22	JING_LI	Change SPEC

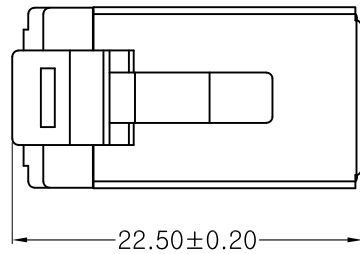

SECTION A-A

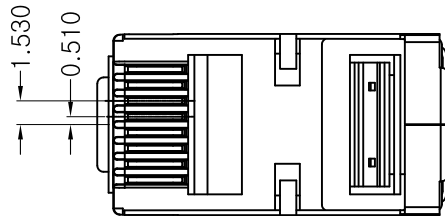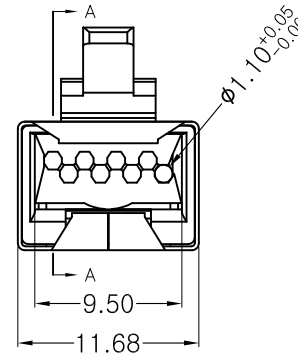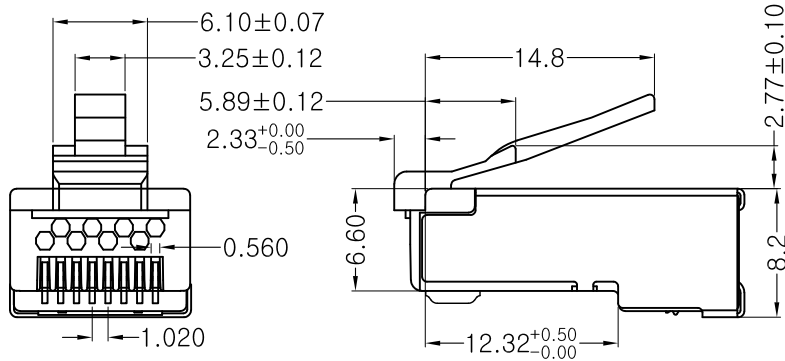

NOTES:

- 1.Operation Temperature:-40℃~+85℃.
- 2.Electrial Characteristics:
 - 2.1>Rated Current:125V AC,1.5A@25℃.
 - 2.2>Contact Resistance:20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
- 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force:30N Max.
 - 3.2>Durability:750 cycles Min.
- 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS, and REACH etc.
- 5.CONDUCTOR:STRANDED&SOLID WIRE,26AWG.
(It can be used for the wire OD fromØ1.05~Ø1.10mm.)

NO	NAME	QTY	PART NO.	DESCRIPTION	MATERIAL
1	Modular Plug	Shell 1PCS Contacts 8PCS Housing 1PCS	43*20**09 /	Square hole 2Prongs 3Prongs	Au: G/F" <input type="checkbox"/> 1u" <input type="checkbox"/> 3u" <input type="checkbox"/> Ni:80u" <input checked="" type="checkbox"/> Brass <input checked="" type="checkbox"/> Spcc <input type="checkbox"/> Brass <input checked="" type="checkbox"/> Phosphor copper <input type="checkbox"/> 94V-2 <input checked="" type="checkbox"/> 94V-0 <input type="checkbox"/>
				DIMENSIONAL TOLERANCE X.X ±0.20 X.XX ±0.10 X.XXX ±0.05 ANGLE ±2°	

DRAWN BY	DATE 2020.06.16	DESCRIPTION: Easy-Connect CAT.6A shielded Modular Plug,3Prong. For 26AWG stranded copper, Nickle plated shell
CHECKED BY	SHEET 1 of 3	ITEM NO:101413
APPROVED BY	SCALE 1:1	REV:00 UNIT:mm