
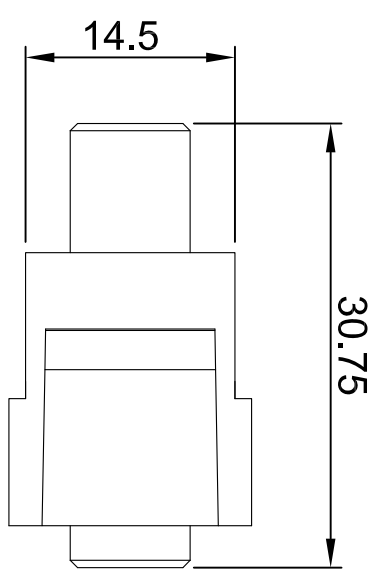
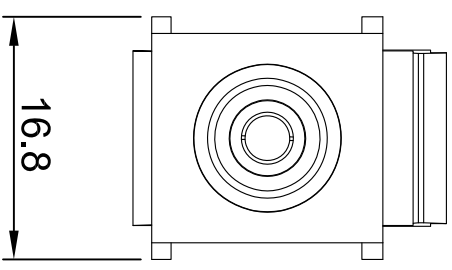
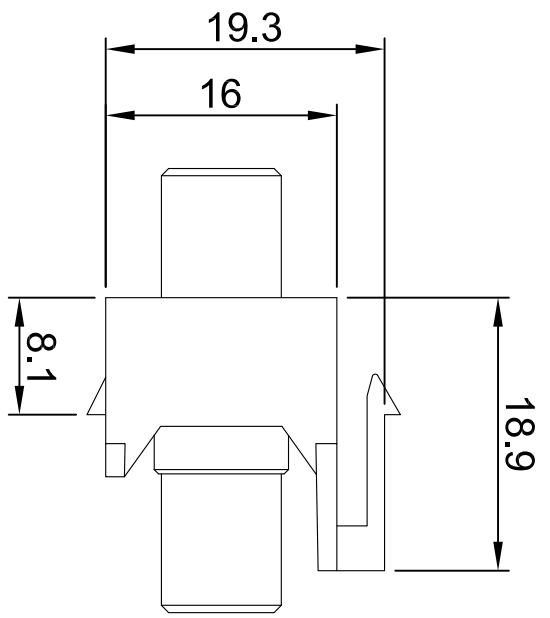


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description




MATERIAL
 PLASTIC HOUSING : ABS high-impact UL94V-0 thermoplastic
PHYSICAL CHARACTERISTICS
 OPERATING TEMPERATURE RANGE : -10 C TO 60 C
 STORAGE TEMPERATURE RANGE : -40 C TO 68 C
 HUMIDITY : 10%~90%RH

ELECTRICAL
 IMPEDANCE: 75 ohm
 FREQUENCY RANGE: 0~2 GHz
 WORKING VOLTAGE: 250 VRMS max.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V/RMS min.
 VSWR: 1.35 max
 CONTACT RESISTANCE: 1.Center Contact: 5 Milliohms Max.
 2.Outer Contact: 1 Milliohms Max.
 INSULATOR RESISTANCE: 1000 Megohms min.

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				

56Y4
 E145249

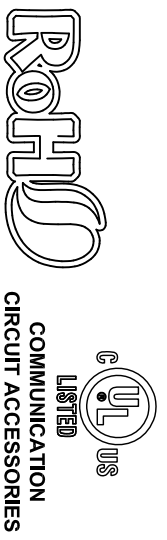

DRAWN BY	LIJIANWEI	DATE:	2013/5/13	DESCRIPTION:	
CHECKED BY		SHEET	1 of 1	ITEM NO.	101817BWT/101817GWT/101817BWT
APPROVED BY		SCALE	2.5:1	REV.	00
				UNIT:	mm