


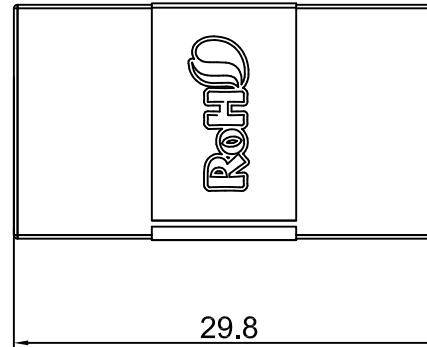
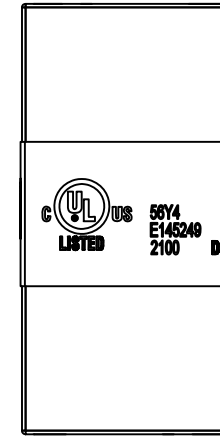
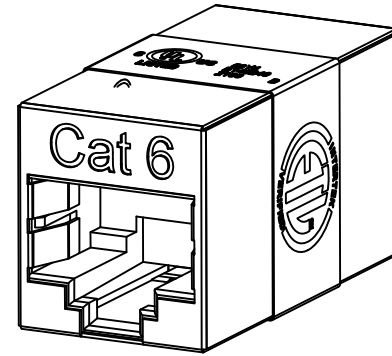


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

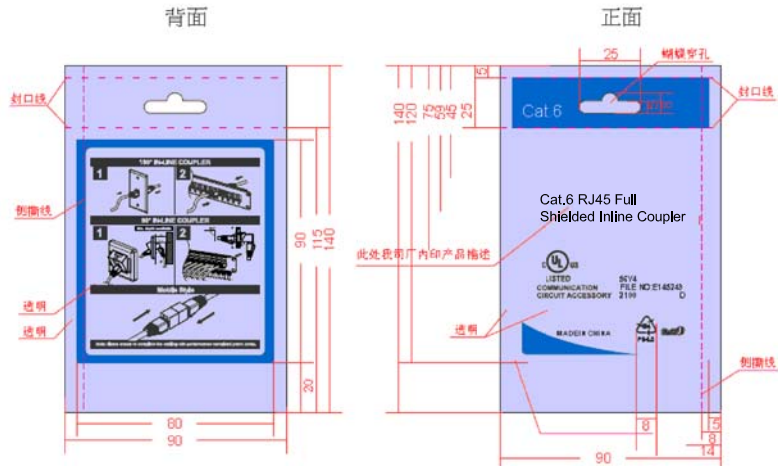

56Y4  
E145249

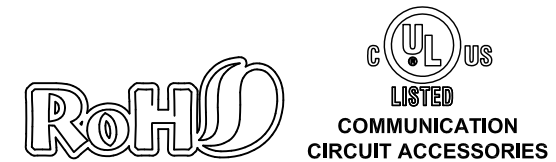

**MATERIAL**  
 PLASTIC HOUSING : ABS high-impact UL94V-0 thermoplastic  
**PHYSICAL CHARACTERISTICS**  
 OPERATING TEMPERATURE RANGE : -10 C TO 60 C  
 STORAGE TEMPERATURE RANGE : -40 C TO 68 C  
 HUMIDITY : 10%~90%RH

**ELECTRICAL**  
 IMPEDANCE: 75 ohm  
 FREQUENCY RANGE: 0~2 GHz  
 WORKING VOLTAGE: 250 VRMS max.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500VRMS min.  
 VSWR: 1.35 max  
 CONTACT RESISTANCE: 1.Center Contact: 5 Milliohms Max.  
 2.Outer Contact: 1 Milliohms Max.  
 INSULATOR RESISTANCE: 1000 Megohms min.

③				
②				
①				
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DRAWN BY	LJIANWEI	DATE:	2013/5/13
CHECKED BY		SHEET 1 of 1	ITEM NO. 102011
APPROVED BY		SCALE 2.5:1	REV. 00
		UNIT: mm	