
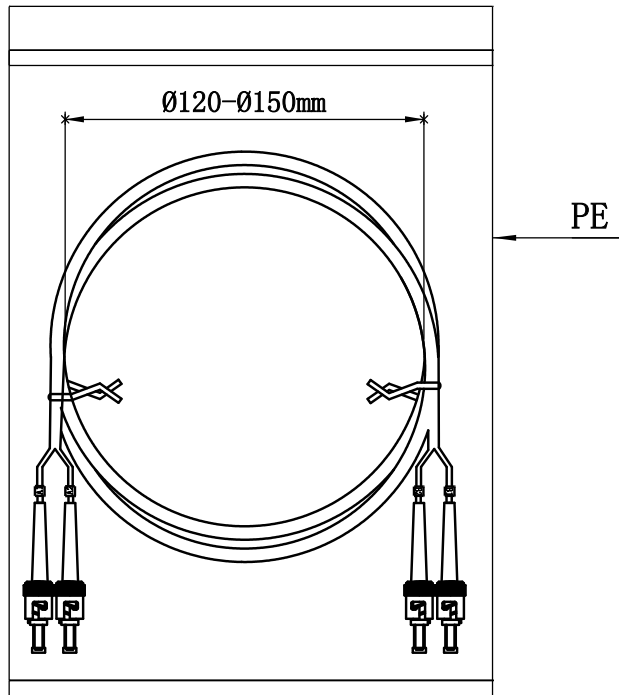


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

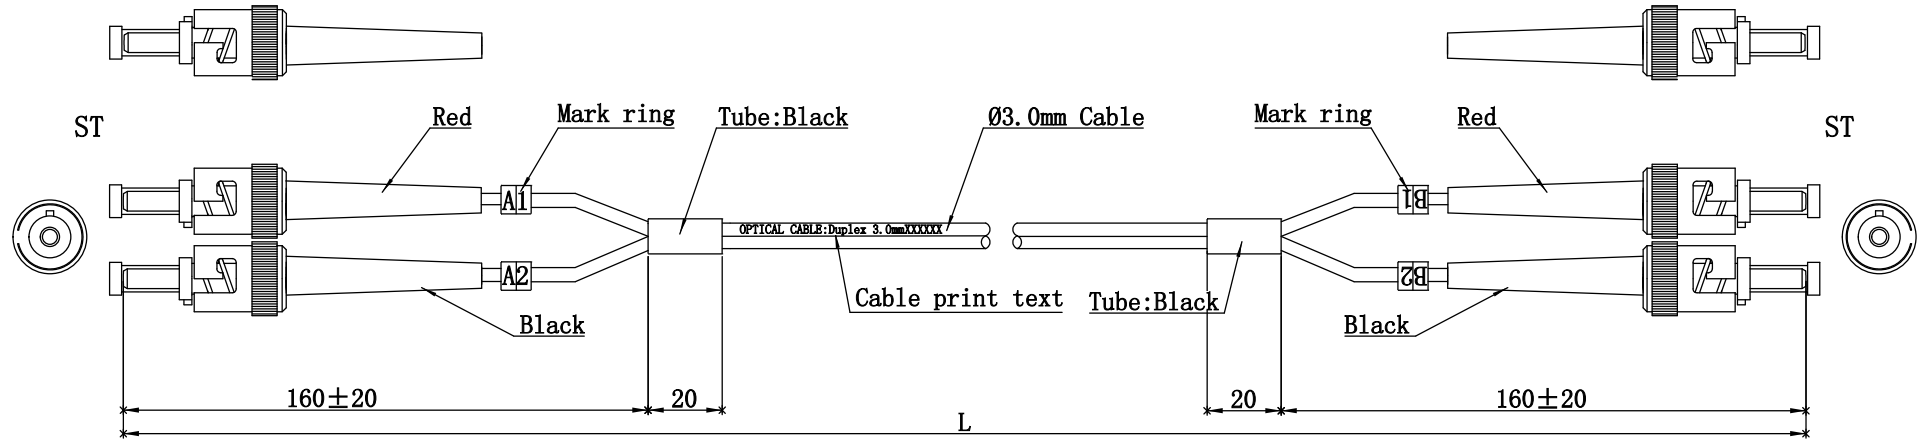

Specifications:

Type	ST/UPC-ST/UPC
Fiber Mode	OM1
Core Diameter (um)	62.5/125
Operating Wavelength (nm)	850/1300
Cable Color	Orange
Cable Diameter (mm)	Ø3.0
Operating Temperature (° C)	-40~+75
Storage Temperature (° C)	-40~+85
Insertion loss (dB)	≤0.2dB
Return loss (dB)	≥35dB
ST Connector Color (Boot)	Red/Black

L ≤ 5m, TOLERANCES: 0 ≤ ΔL ≤ 5cm
 L > 5m, TOLERANCES: 0 ≤ ΔL ≤ 1%*L

Remarks:

Length	ITEM NO.
L=0.3M	102931
L=1M	102708
L=2M	102709
L=3M	102710
L=5M	102712
L=10M	102838
L=15M	102935



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:
 .x +1
 +0.2
 .xx +0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: ST-ST-DX OM1 Patchcord	
CHECKED BY	SHEET 1of1	ITEM NO.	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm