
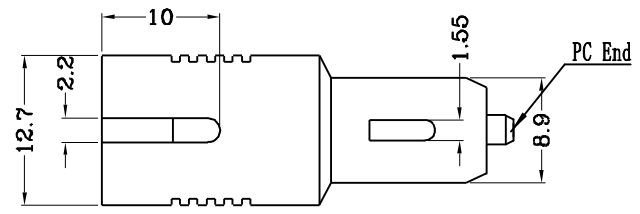



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

| REVISION INFORMATION | | | |
|----------------------|-----------|-------------|-------------------|
| Rev. | Rev. Date | Modified By | Brief Description |
| | | | |

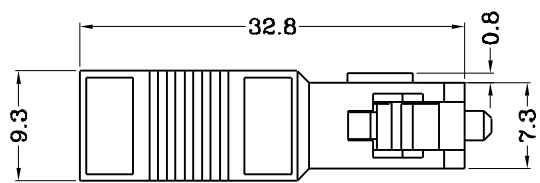

Specifications:

| Parameter | Value | Unit |
|------------------------------------|--------------|-----------|
| Operating Wavelength | 1310/1550±10 | nm |
| Tolerance for 1~5 db Attenuation | ±0.5 | dB |
| Tolerance for 6~9 db Attenuation | ±0.7 | dB |
| Tolerance for 10~30 db Attenuation | ±1.0 | % |
| Operating Temperature | -40to+75 | C |
| Polarization Dependent Loss | ≤ 0.1 | dB |
| Mating Durability | ≥ 1000 | cycle |
| Reversal Of Loss | ≥ 50 | dB |
| Input Optical Power | ≤ 200 | mW |



| ③ | | | | |
|-----|-----------|---------------------------|-----|------|
| ② | | | | |
| ① | | | | |
| NO. | PART NAME | SPECIFICATION DESCRIPTION | QTY | UNIT |

| | | |
|-------------|---------------------------|---|
| DRAWN BY | DATE: 2015/5/18 | DESCRIPTION: SC/PC Attenuator |
| CHECKED BY | SHEET 1 of 1 | ITEM NO. |
| APPROVED BY | SCALE 1:1 | REV. 00 UNIT: mm |