





NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev.Date	Modified By	Brief Description

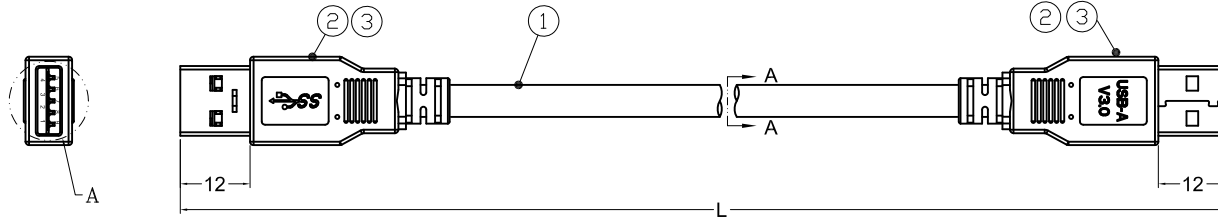

BLACK INK MARKING: USB 3.0 CABLE 28AWG AWM E139315-F5 STYLE 2725 80°C 30V VW-1

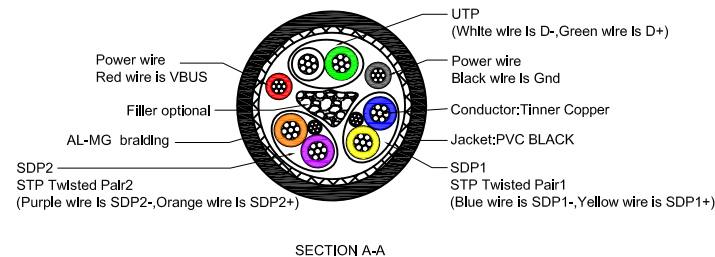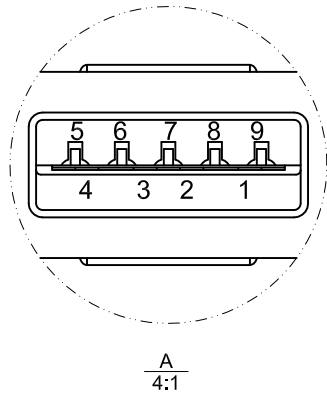

Standard_A Plug #1		Wire		Standard_A Plug #2	
Pin	Signal Name	Wire	Signal Name	Pin	Signal Name
1	VBUS	PWR		1	VBUS
2	D-	UTP_D-		2	D-
3	D+	UTP_D+		3	D+
4	GND	4	GND_PWRrt	4	GND
5	SSRX-	5	SDP1-	8	SSTX-
6	SSRX+	6	SDP1+	9	SSTX+
7	GND_Drain	7, 10	SDP1_Drain SDP2_Drain	7	GND_Drain
8	SSTX-	8	SDP2-	5	SSRX-
9	SSTX+	9	SDP2+	6	SSRX+
Shell	Shield	Braid	Shield	Shell	Shield

RATING TEMPERATURE: -10°C~+80°C
 RATING VOLTAGE: 30V.
 INSULATION RESISTANCE: DC/250V 10MΩ MIN.
 WITHSTAND VOLTAGE: AC/250V 5mA FOR ONE MINUTE.
 CONDUCTOR RESISTANCE:2Ω MAX.



DRAWN BY	DATE: 2012/09/17	DESCRIPTION: USB 3.0 A-Male to A-Male
CHECKED BY	SHEET 1of1	ITEM NO.
APPROVED BY	SCALE 1:1	REV.00 UNIT:mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	Molding	PVC: BLUE	A/R	g
②	USB 3.0 A Male Plug	Terminal:Phos/Brass,Gold plated G/F	2	Pcs
①	USB 3.0 CABLE	USB 3.0 CABLE 3P*28AWG+2C*28AWG	L	mm