


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

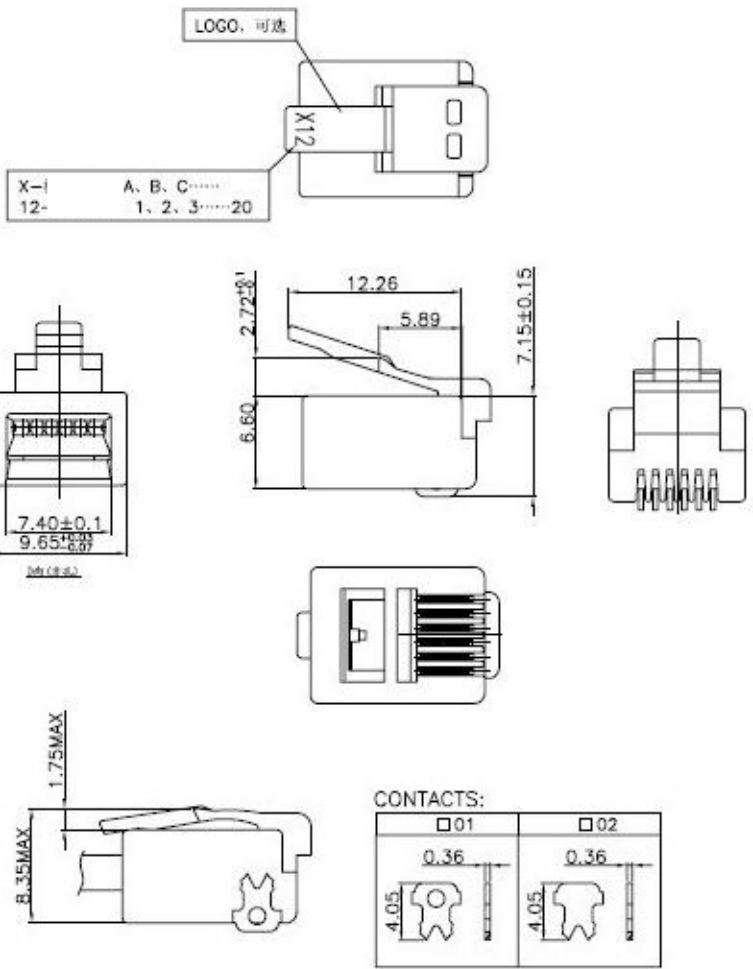

1 : 1000M Ω MIN
 2 : 1000AC(50-60Hz)1MINUTE
 3 : 30m Ω MAX

1 : 7.79Kg MIN
 2 : 750 CYCLES MIN

6P6CM		XX	XX	XX	XX	XX	C
6P6CM.		C-1000PCS					
UTP:		L2-					
		Q1-					
		05-UL94V-2,4					
		02-UL94V-0,4#					
UTP:		F8-0.8u'		15-15u'			
		03-3u'		30-30u'			
		06-6u'		50-50u'			
01-							
02-							

③	Plug Type	RJ12		
②	Cable Type	Stranded Flat Wire		
①	Connector	(6P6C)		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DRAWN BY	DATE:	DESCRIPTION:
CHECKED BY	SHEET 1 of 1	ITEM NO. 170304
APPROVED BY	SCALE 1:1	REV. 00
	UNIT: mm	