


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
	2014.08.06		

" L=75FT±23CM"

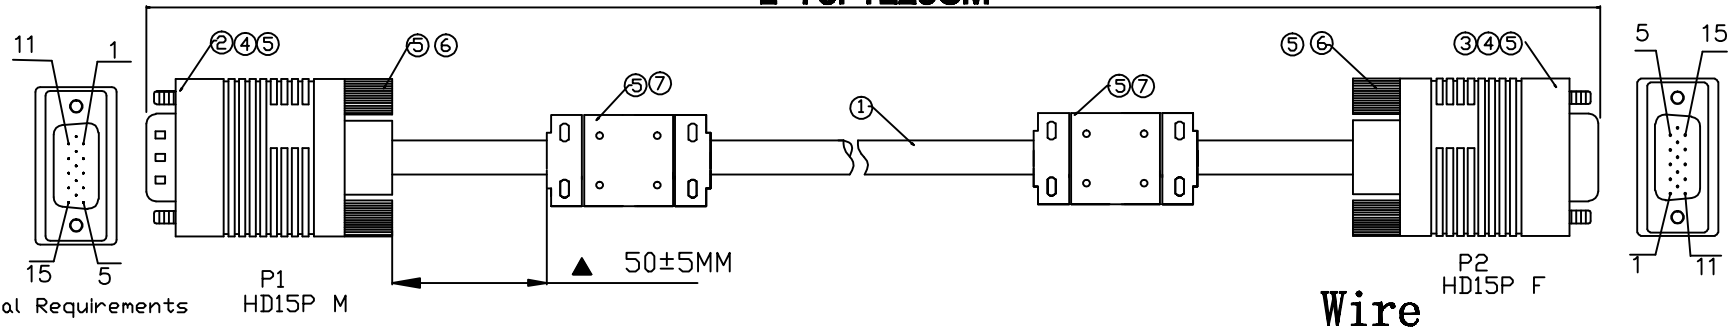

Technical Requirements HD15P M

1.Electrical Characteristics:

1.1.cable must pass electrical testing, no short circuit, open circuit, indirect sexual contact, insufficient insulation, dislocation, and other electrical contact resistance of adverse circumstances

1.2 Electrical Test Conditions

Conductor Resistance: ≤10Ω  
Insulation resistance: ≥10MΩ/300V

2.Appearance requirements:

- 2.1 No shot short.shrink. flow liner
- 2.2 Wire surface printing clear, smooth appearance, can not have scratches and obvious color
- 2.3 15PIN connector no empty pin and blunt glue
- 2.4 Terminals can not have oxidation or electrodeposited coating fall off

3.Size request

- 3.1 cable length match the drawing
- 3.2 ▲ qc test according to this size
- 4. cable wire connect point view the point



5.Packing:

Circle around a single package.

1). Material List :

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑦	Ferrite	Ferrite10. 5*17. 5*28. 5mm	2	PCS
⑥	SCREW	Screw2.5*45MM	4	PCS
⑤	Outer Moulding	45P Black PVC(ROHS)	NA	KG
④	PE	PE Internal Mold Material	NA	KG
③	Connector	HD15PF Blue Bobbin Nickel-Plated	1	PCS
②	Connector	HD15PM Blue Bobbin Nickel-Plated	1	PCS
①	Wire	(7/0. 12TC+FINE+30/0. 12CCA+2. 5PVC)*3Coax+7/0. 12TC*8C+AL+D 7/0. 12BC+1288 AL-MS 009. 5	75	FT

Wire

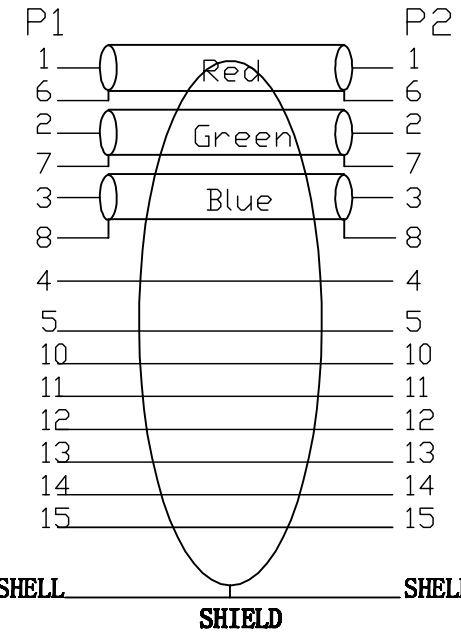



DRAWN BY	DATE: 2014/08/06	DESCRIPTION: 75FT SVGA Male to Female Cable w/Ferrite Core
CHECKED BY	SHEET 1 of 1	ITEM NO. 180468
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm