


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
	2014.08.06		

"L=100FT±30CM"

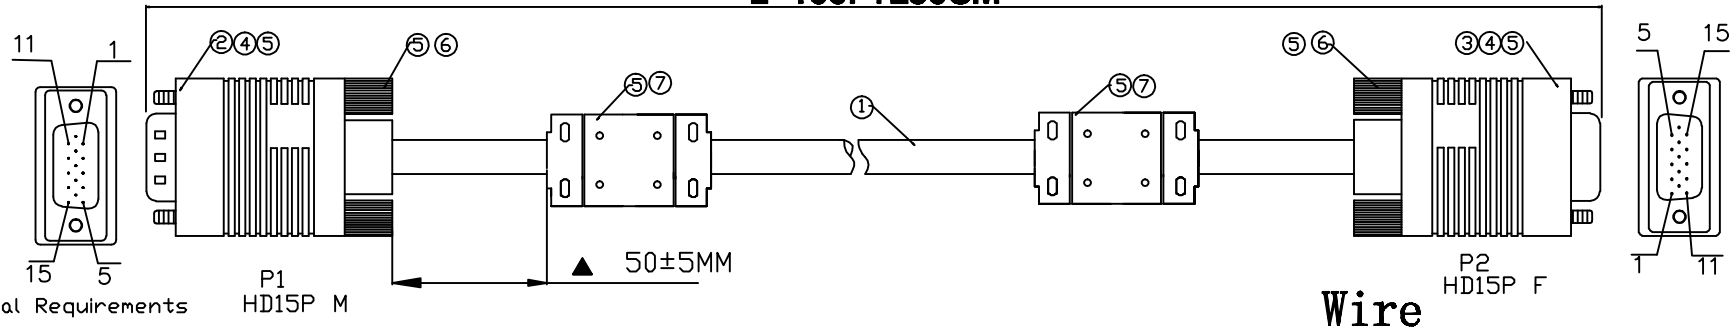

Technical Requirements HD15P M

1. Electrical Characteristics:

1.1. cable must pass electrical testing, no short circuit, open circuit, indirect sexual contact, insufficient insulation, dislocation, and other electrical contact resistance of adverse circumstances

1.2 Electrical Test Conditions

Conductor Resistance: $\leq 10\Omega$
 Insulation resistance: $\geq 10M\Omega/300V$

2. Appearance requirements:

- 2.1 No shot short, shrink, flow liner
- 2.2 Wire surface printing clear, smooth appearance, can not have scratches and obvious color
- 2.3 15PIN connector no empty pin and blunt glue
- 2.4 Terminals can not have oxidation or electrodeposited coating fall off

3. Size request



- 3.1 cable length match the drawing
- 3.2 *▲ qc test according to this size
- 4. cable wire connect point view the point

5. Packing:

Circle around a single package.

1). Material List :

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑦	Ferrite	Ferrite 10.5*17.5*28.5mm	2	PCS
⑥	SCREW	Screw 2.3*40MM	4	PCS
⑤	Outer Moulding	45P Black PVC (ROHS)	NA	KG
④	PE	PE Internal Mold Material	NA	KG
③	Connector	HD15PF Blue Bobbin Nickel-Plated	1	PCS
②	Connector	HD15PM Blue Bobbin Nickel-Plated	1	PCS
①	Wire	(7/0.12TC+P/PE+30/0.12CCA+2.5PVC)*3Coax+7/0.12TC+8C+AL+D 7/0.12BC+128B AL-MG 009.5	100	FT
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

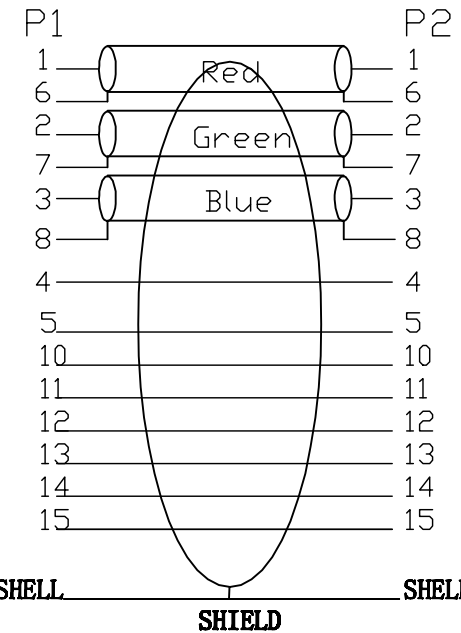

BestLinkNetware

DRAWN BY	DATE: 2014/08/06	DESCRIPTION: 100FT SVGA Male to Female Cable w/Ferrite Core	
CHECKED BY	SHEET 1 of 1	ITEM NO. 180469	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm