

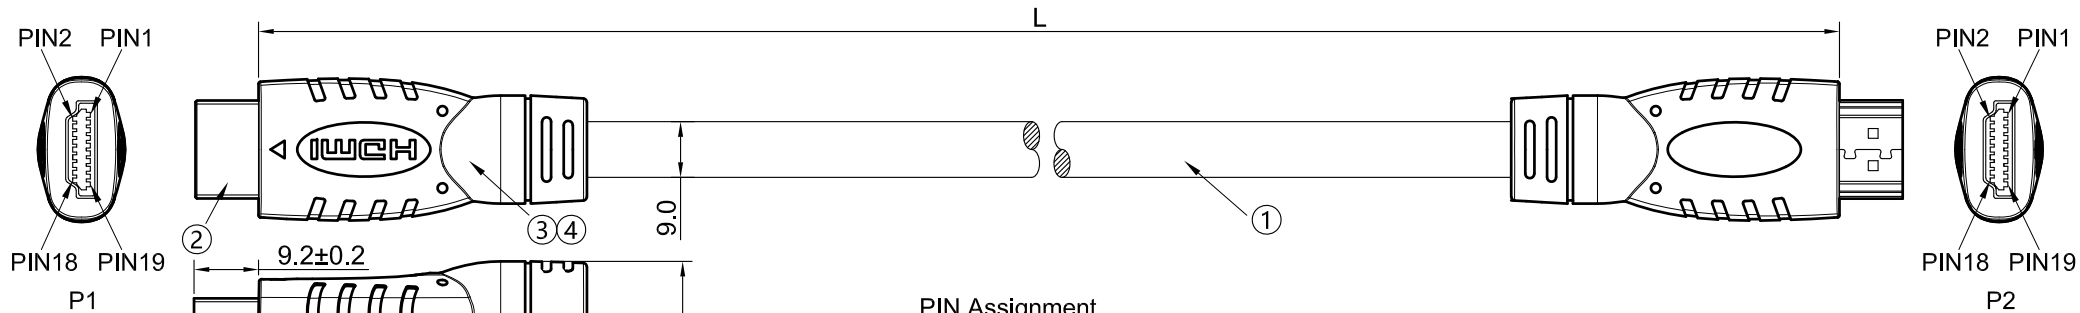


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rec.	Rec. Date	Modified By	Brief Description

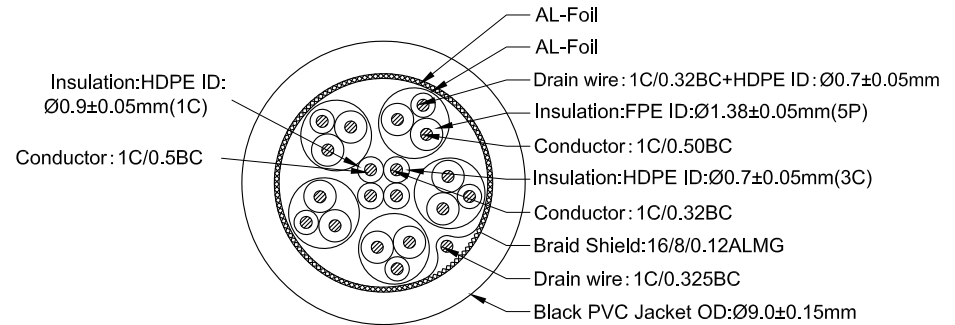

PIN Assignment

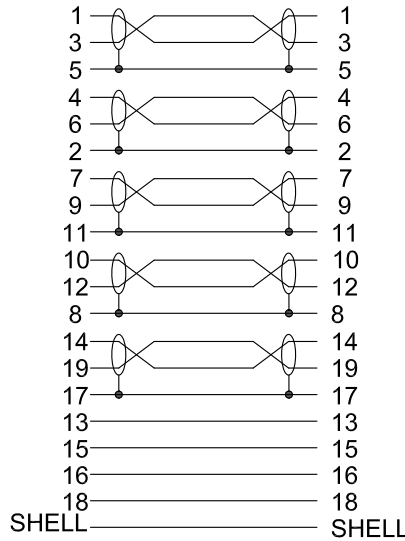

P/N	LENGTH(FT)	TOLERANCE
181364	30	±50mm

NOTES:

- Test Condition:
  - 100% OPEN & SHORT TEST;
  - Insulation Resistance: DC300V 5MΩ(Min) ;
  - Conductor Resistance: 5Ω/Max.
  - Hi-Pot:DC 300V/0.1s.
- The product is ROHS compliant.
- HDTV-DVD TEST:4K@60Hz
- All material requirements comply with CA65 standards.
- 3D TEST

TOLERANCE:	
LINEAT: X. =±1 .X =±0.2 .XX=±0.05	ANGULAR: X.° =±1° .X° =±0°30'
FILLET: R2=RAD.2mm R5=RAD.5mm XR=MAX RAD.	CHAMFER: C0.5=CHAM0.5mm C1=CHAM1mm

4	OUTER MOLDED: 45P PVC MOLDED BOOT
3	INNER MOLDED: PE Low density
2	CONN: HDMI AM iron case gold plated/black rubber core + 24AWG bracket
1	WIRE: [(1C/0.50BC+FPE1.38mm)*1P+(1C/0.32BC+HDPE 0.7mm)+AL-Foil+PET MY]*5P+(1C/0.5BC+HDPE 0.9mm)*1C+(1C/0.32BC+HDPE 0.7mm)*3C+AL-Foil+1C/0.32BC+128#/0.12AL-MG+BLACK PVC OD:9.0±0.15mm

DRAWN BY FW	DATE: 2023/07/31	DESCRIPTION: 30FT HDMI Cable 4K/60Hz 28AWG
CHECKED BY Ace	SHEET 1 of 2	ITEM NO. 181364
APPROVED BY	SCALE 1:1	REC. 00 UNIT: mm

NO.	SPECIFICATION
	BOM LIST